# MCA 385 BOP CONFIGURATION

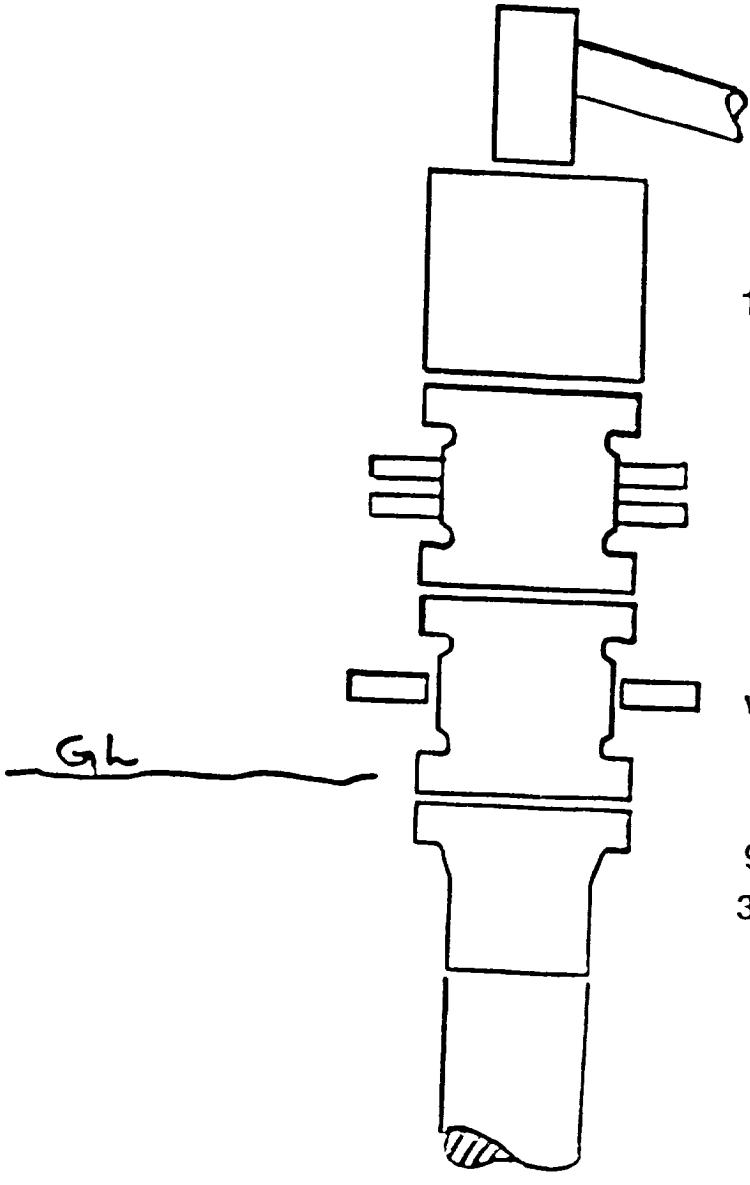


11" rotating head with a minimum of 8" ID discharge line

11" 3000 psi WP annular preventer

11", 3000 psi WP double ram BOP

3000 psi WP spool with choke and kill lines

9-5/8" Slip-on x 11", 3000 psi WP casing head

9-5/8" Casing