


DRILLING CONTROL
CONDITION IV-B-5000 PSI WP

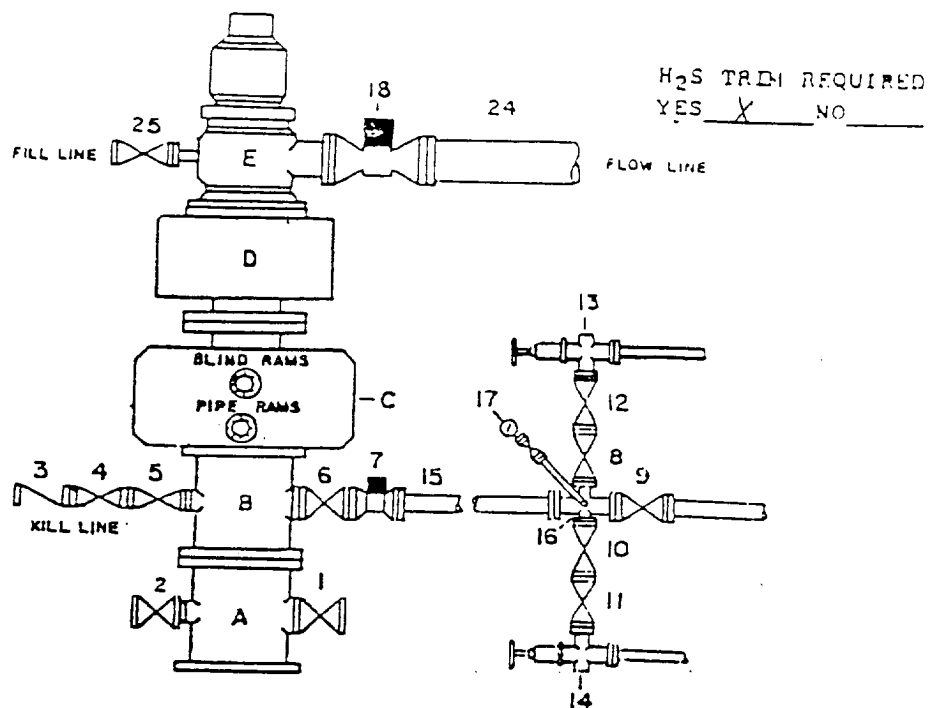

DRILLING CONTROL

MATERIAL LIST - CONDITION IV - B

- A Texaco Wellhead
- B 5000# W.P. drilling spool with a minimum 1" flanged outlet for kill line and 1" minimum flanged outlet for choke line.
- C 5000# W.P. Dual ram type preventer, hydraulic operated with 1" steel, 5000# W.P. control lines.
- D 5000# W.P. Annular preventer, hydraulic operated with 1" steel, 5000# W.P. control lines.
- E Rotating Head with fill up outlet and extended Blooie line.
- 1,2,4,5, 8,10,11, 12 2" minimum 5000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve.
- 3 2" minimum 5000# W.P. back pressure valve.
- 4,9 1" minimum 5000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve.
- 7 1" minimum 5000# W.P. flanged hydraulic valve
- 15 1" minimum Schedule 160, Grade B, seamless line pipe
- 16 2" minimum x 1" 5000# W.P. flanged cross
- 13,14 2" minimum 5000# W.P. adjustable chokes with carbide trim.
- 17 Cameron Mud Gauge or equivalent (location in choke line optional).
- 18 6" minimum 1000# hydraulic flanged valve.
- 24 8" minimum steel flow line.
- 25 2" minimum 3000# W.P. flanged or threaded full opening steel gate valve, or Halliburton Lo Torc Plug valve.



TEXACO, INC.
MIDLAND DIVISION
MIDLAND, TEXAS



SCALE	DATE	EST. NO.	CRU. NO.
DRAWN BY			
CHECKED BY			
APPROVED BY			

EXHIBIT F-1

ABOVE DATE DOES NOT
INDICATE WHEN
CONFIDENTIAL LOGS
WILL BE RELEASED

ELF

2/10/11
2/2/12

