

(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office San Antonio  
Lease No. 04591  
Unit \_\_\_\_\_

SUNDRY NOTICES AND REPORTS ON WELLS

|   |                                     |   |  |
|---|-------------------------------------|---|--|
| NOTICE OF INTENTION TO DRILL.....                   | <input checked="" type="checkbox"/> | SUBSEQUENT REPORT OF WATER SHUT-OFF.....        |  |
| NOTICE OF INTENTION TO CHANGE PLANS.....            |                                     | SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING..... |  |
| NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....     |                                     | SUBSEQUENT REPORT OF ALTERING CASING.....       |  |
| NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL..... |                                     | SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR..... |  |
| NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....        |                                     | SUBSEQUENT REPORT OF ABANDONMENT.....           |  |
| NOTICE OF INTENTION TO PULL OR ALTER CASING.....    |                                     | SUPPLEMENTARY WELL HISTORY.....                 |  |
| NOTICE OF INTENTION TO ABANDON WELL.....            |                                     |   |  |

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

APR 11, 1957

Well No. 11-13 is located 170 ft. from N line and 340 ft. from E line of sec. 13

Sec. 13 (1/4 Sec. and Sec. No.) 13 (Twp.) 13 (Range) 13 (Meridian)  
Green (Field) 13 (County or Subdivision) 13 (State or Territory)

The elevation of the derrick floor above sea level is 1240 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

I plan to drill a 4375' green sand test. Rotary tools will be used to approximately 1625', and cable tools from there to total depth.

4-5/8" casing will be set in the top of the anhydrite about 1625'. This is predicated on there being no surface water at this location. I will drill to 2500', bail the hole dry, and check for any possible water. If water is found, will set 11-3/4" at 2500' with 200 sacks before drilling on ahead.

The 5" oil string will be cemented in the green sand at approximately 4300', with 100 sacks.

All casing will be run and cemented using methods approved by the U. S. Geological Survey.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Smith, Ring

Address Box 5, 13

Green, Texas

By Smith, Ring

Title Owner

NEW MEXICO  
OIL CONSERVATION COMMISSION

Form C-128

Well Location and/or Gas Proration Plat

Date JAN 18 1957

Operator JOHN H TRIGG Lease FEDERAL "T"


Well No. 14-13 Section 13 Township 18-S Range 33-E NMPM

Located 660' Feet From WEST Line, 1980 Feet From NORTH Line,

LEA County, New Mexico. G. L. Elevation 3964'

Name of Producing Formation \_\_\_\_\_ Pool \_\_\_\_\_ Dedicated Acreage \_\_\_\_\_

(Note: All distances must be from outer boundaries of Section)

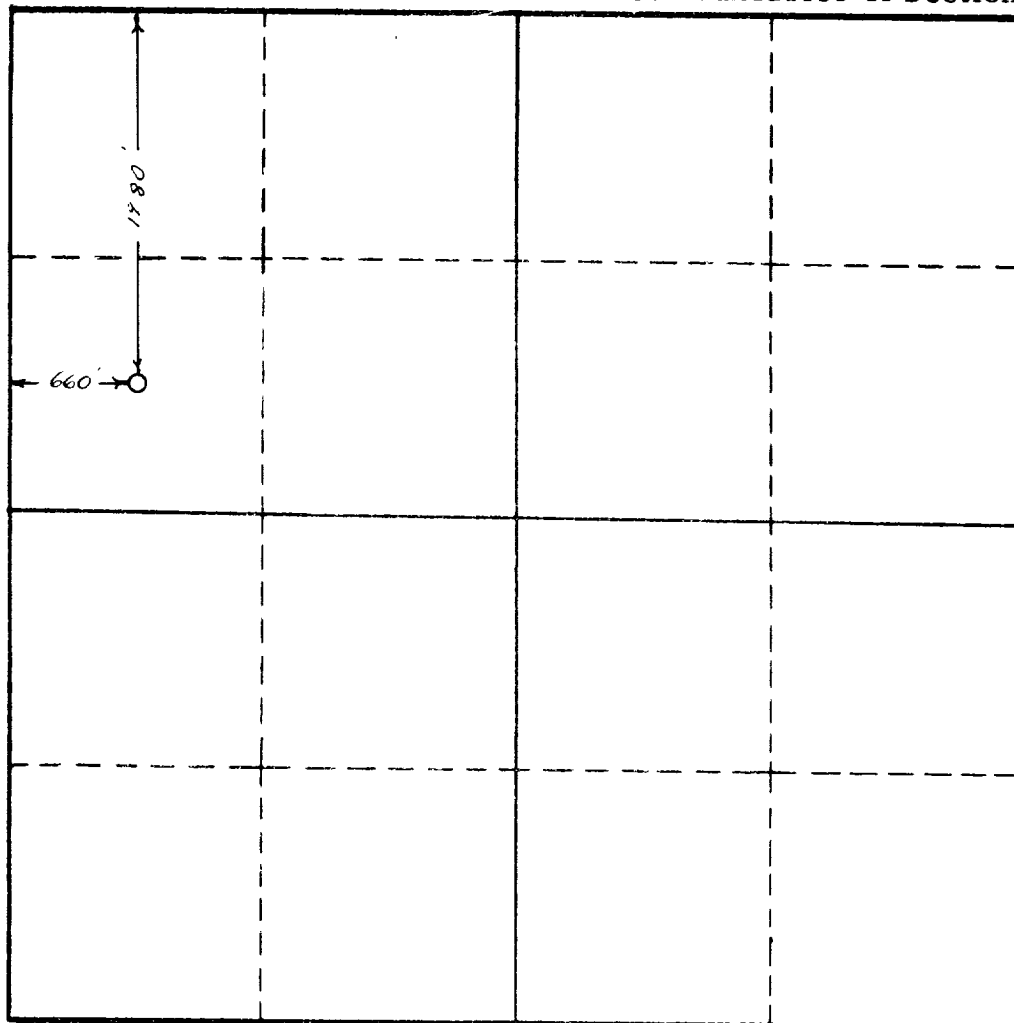

SCALE: 1"=1000'

1. Is this Well a Dual Comp. ? Yes \_\_\_ No \_\_\_.
2. If the answer to Question 1 is yes, are there any other dually completed wells within the dedicated acreage ? Yes \_\_\_ No \_\_\_.

This is to certify that the above plat was prepared from field notes of actual surveys made by me or under my supervision and that the same are true and correct to the best of my knowledge and belief.

Name \_\_\_\_\_  
Position \_\_\_\_\_  
Representing \_\_\_\_\_  
Address \_\_\_\_\_

Date Surveyed JAN 17 1957  
John W West  
Registered Professional Engineer and/or  
Land Surveyor