


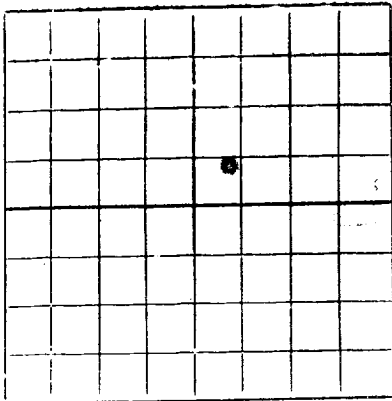

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico HOOPS OFFICE 000

1985 AUG 23 AM 9:59

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

AREA 640 ACRES
LOCATE WELL CORRECTLY

S. P. Yates

Gulf-Angle State

(Company or Operator)

(Lease)

Well No. 2, in SW 1/4 of NE 1/4, of Sec. 11, T. 17N, R. 14E, NMPM.

Vacuum

Pool,

Lee

County.

Well is 1650 feet from East line and 2310 feet from North line

of Section 11. If State Land the Oil and Gas Lease No. is E-500

Drilling Commenced 4-9, 1955 Drilling was Completed 8-5, 1955

Name of Drilling Contractor own tools

Address

Elevation above sea level at Top of Tubing Head. The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 4600 to 4710 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
8-5/8"	240	New	1600	Reg.			Surface
5-1/2"	15.50	New	4663	Float			Production

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12-1/4"	8-5/8	1600'	100	Halliburton		
7-7/8	5-1/2	4663'	175	Halliburton		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Well not treated

All measurements are from derrick floor - height of derrick floor, 11 feet.

Result of Production Stimulation

Depth Cleaned Out

JORD OF DRILL-STEM AND SPECIAL

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 1099 feet, and from 1705 feet to 4713 feet
 Cable tools were used from 1400 feet to 1705 feet, and from feet to feet

PRODUCTION

Put to Producing 8-3, 19 33

OIL WELL: The production during the first 24 hours was 98 barrels of liquid of which 100 was oil; % was emulsion; % water; and % was sediment. A.P. Gravity 36

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy.	T. Devonian	T. Ojo Alamo
T. Salt	T. Silurian	T. Kirtland-Fruitland
B. Salt	T. Montoya	T. Farmington
T. Yates	T. Simpson	T. Pictured Cliffs
T. 7 Rivers	T. McKee	T. Menefee
T. Queen	T. Ellenburger	T. Point Lookout
T. Grayburg	T. Gr. Wash	T. Mancos
T. San Andres	T. Granite	T. Dakota
T. Glorieta	T.	T. Morrison
T. Drinkard	T.	T. Penn
T. Tubbs	T.	T.
T. Abo	T.	T.
T. Penn	T.	T.
T. Miss	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	65		Caliche	2915	2960		Broken sand
65	140		Red shale	2960	2975		Muddy caving red bed
140	180		Sand - water	2975	2995		Anhy.
180	230		Brown shale	2995	3020		Anhy. Red rock
230	305		Blue shale & shells	3020	3045		Anhy.
305	410		Red bed	3045	3070		Lime & Anhy.
410	600		Sand	3070	3140		Anhy. Lime shells, Lime
600	600		Red rock	3140	3295		Anhy. Lime broken
600	870		Red shale	3295	3380		Lime, anhy.
870	1475		Red rock	3380	3515		Anhy.
1475	1625		Red rock & shells	3515	3600		Anhy., Lime shells
1625	2770		Anhy	3600	3645		Anhy.
1770	1815		Red rock & anhy.	3645	3655		Red rock
1815	1870		Salt & red bed	3655	3750		Anhy., Lime
1870	2005		Salt	3750	3835		Anhy.
2000	2115		Salt, Red rock	3835	3875		Anhy. Gray sand
2115	2570		Salt	3875	4024		Anhy., Gyp.
2570	2600		Anhy.	4024	4045		Lime, Anhy.
2600	2670		Salt	4045	4062		Lime, Anhy.
2670	2715		Salt, Anhy.	4062	4024		Gyp, Lime
2715	2925		Anhy.	4024	4713		Lime T.D.

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

8-17-35

Company or Operator S. P. Yates
 Name

Address 309 Cargos Bldg. Artesia, N. Mex.
 Position or Title Office Manager