


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

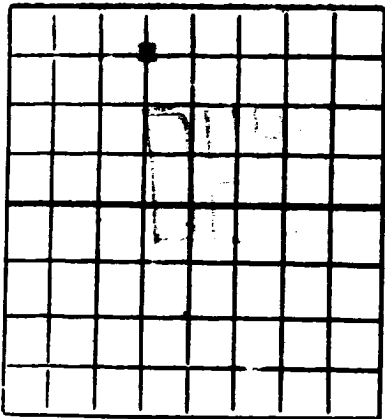

AREA 640 ACRES
LOCATE WELL CORRECTLY

THE ONTO OIL COMPANY

State Bridge #2

(Company or Operator)

(Lease)

Well No. 4, in NE 1/4 of NW 1/4, of Sec. 12, T. 17S, R. 34E, NMPM.

Wagon

Pool,

Lee

County.

Well is 660' feet from north line and 1900' feet from west line of Section 12. If State Land the Oil and Gas Lease No. is 8-2244

Drilling Commenced January 21, 1956 Drilling was Completed February 8, 1956

Name of Drilling Contractor Company

Address Box 2107, Hobbs, New Mexico

Elevation above sea level at Top of Tubing Head 4030' The information given is to be kept confidential until 1956

OIL SANDS OR ZONES

No. 1, from 4660' to TD No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet
No. 2, from to feet
No. 3, from to feet
No. 4, from to feet

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SEAM	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
20-3/4"	32.75	New	639.46	DRIFT OILS	-		Surfing
7"	23	-	4700.50	Water Flow		4700-4712	Oil

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. BAGS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
20-3/4"	20-3/4"	639.46	330	2 plug		
8-3/4"	7"	4800.00	400	2 plug		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qt. or Gals. used, interval treated or shot.)

Perforated 7" casing from 4700-12' with 6 jet shots/ft & acidised with 500 gals mud acid.
Acidised parts (4700-12) with 6,000 gals non-emulsifying low surface tension acid.

Result of Production Stimulation

Well put on pump & potentialized 45.96 BO in 24 hrs pumping 12 - 34" gpm. gravity 37.5 & 60" V. 1216:1

Depth Cleaned Out

4707'

JOINT OF DRILL-STEM AND SPECIAL TEST

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from Surface feet to 1.1 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing 3-12, 1956

OIL WELL: The production during the first 24 hours was 16.05 barrels of liquid of which 99.8% was oil; % was emulsion; % water; and .2% was sediment. A.P.I. Gravity 37.5 @ 60° F.

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico		Northwestern New Mexico	
T. Anhy	1670	T. Devonian	
T. Salt	1790	T. Silurian	
B. Salt	2745	I. Montoya	
T. Yates	2908	I. Simpson	
T. 7 Rivers	3238	I. McKee	
T. Queen	3891	I. Ellenburger	
T. Grayburg	4252	E. Gr. Wash.	
T. San Andres	4668	I. Granite	
T. Glorieta		T.	
T. Drinkard		T.	
T. Tubbs		T.	
T. Abo		T.	
T. Penn		T.	
T. Miss		T.	
T. Ojo Alamo			
T. Kirtland-Fruitland			
T. Farmington			
T. Pictured Cliffs			
T. Menefee			
T. Point Lookout			
T. Mancos			
T. Dakota			
T. Morrison			
T. Penn			
T.			
T.			
T.			
T.			

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	363	363	Shale - shells				
363	660	297	Anhy.				
660	1336	676	Red Beds				
1336	1681	345	" " - Anhy.				
1681	3060	1379	Anhy - salt				
3060	3733	673	"				
3733	3812	79	" Lims				
3812	4045	233	"				
4045	4090	45	" - Lims				
4090	4670	580	"				
4670	4767	97	" - Lims				
4767	4800	33	" - Dolo.				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

March 16, 1956

THE CHIC OIL COMPANY

Box 2107, Hobbs, New Mexico

Company or Operator

Address

ORIGINAL SIGNED BY

Petroleum Engineer

Name CLYDE E. ALTON

Position or Title