


N

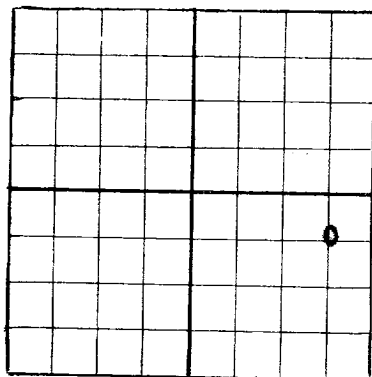

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Stanolind Oil & Gas Company

Box "F", Hobbs, New Mexico

State "NM"

Company or Operator

Address

Well No. 1

NE/4 of SE/4

21

T. 18-S

R. 34-E

Lease

Wildcat

Field, Lea

County.

Well is 1980

North

South

660

feet west of the East line of Section 21

If State land the oil and gas lease is No. 51693

Assignment No.

If patented land the owner is

Address

If Government land the permittee is

Address

The Lessee is

Address

Drilling commenced December 4, 1944

Drilling was completed February 5, 1945

Name of drilling contractor Noble Drilling Co.

Address Tulsa, Oklahoma

Elevation above sea level at top of casing 4032 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from None to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13" OD	50#	8 V	SH	805	None				Surface String
8-5/8" OD	32#	8 V	SH	1924	Larkin				Salt String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17	13"	314	250	Halliburton		
11	8-5/8"	1916	450	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 5600 feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing Dry 19
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

G. O. Stead Driller W. L. Clawson Driller
A. F. Webster Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 16

day of February 19 45

R. M. Russell Jr.
Notary Public

My Commission expires 5-5-47

Hobbs, N. M. Feb. 16, 1945

Name Joseph J. Henshaw

Position Field Superintendent

Representing Stanolind Oil & Gas Co.

Address Box 7, Hobbs, N. M.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	63		Sand
63	123		Caliche
123	1570		Red Bed
1570	1635		Red Rock & anhydrite
1635	1829		Red beds
1829	2003		Anhydrite
2003	2335		Salt and Anhydrite
2335	2450		Anhydrite
2450	2835		Salt
2835	3005		Salt and Anhydrite
3005	3020		Anhydrite
3020	3150		Salt
3150	3868		Anhydrite
3868	3885		Lime
3885	3974		Lime and Anhydrite
3974	4081		Lime
4081	4137		Lime and Anhydrite
4137	4161		Lime
4161	4191		Lime & Anhydrite
4191	5600		Lime

Total Depth 5,600'
To Be Slugged: Abandoned