


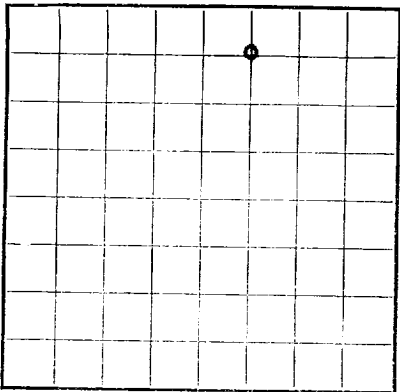

LOCATE WELL CORRECTLY

U. S. LAND OFFICE **Las Cruces**
SERIAL NUMBER **069457**
LEASE OR PERMIT TO PROSPECT

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

Company **The Ibox Company** Address **Box 752, Breckenridge, Texas**
Lessor or Tract **McElvain Federal** Field **E K Queen** State **New Mexico**
Well No. **2** Sec. **30** T. **18S** R. **34E** Meridian **NMPM** County **Lea**
Location **660** ft. **1411** of **N** Line and **1980** ft. **1411** of **E** Line of **Sec. 30** Elevation **3966**
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed *[Signature]*
Date **November 21, 1955** Title **Production Supt.**

The summary on this page is for the condition of the well at above date.

Commenced drilling **10-13**, 19 **55** Finished drilling **11-7**, 19 **55**

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from **4732** to **4743** No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
10 3/4	32.75	8	Rep.	278	Texas				Surface Pipe
5 1/2	15.51	8	Rep.	4790	Baker				Oil Sampling

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
10 3/4	278	200	Plug		
5 1/2	4790	300 sacks 12% gel & 150 sacks 4% gel.	Plug		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out

TOOLS USED

Rotary tools were used from **0** feet to **5401** feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

_____, 19 _____ Put to producing **11-16**, 19 **55**

The production for the first 24 hours was **211** * barrels of fluid of which **100** % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, °Bé. **34.8**

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

T. Holsey _____, Driller **S. D. Blythe** _____, Driller
R. E. Lee _____, Driller _____, Driller

FORMATION RECORD


FROM—	TO—	TOTAL FEET	FORMATION
0	278	278	Surface formations
278	482	204	red bed
482	3548	3066	red bed, anhy
3548	3774	226	gyp and shale
3774	3909	135	anhy and gyp
3909	3982	73	anhy and lime stks
3982	4009	27	lime and anhy
4009	4072	63	anhy
4072	4125	53	anhy and gyp
4125	4310	185	lime and anhy
4310	4454	144	Dolo and anhy
4454	4520	66	sand
4520	4731	211	Dolo, anhy and red shale
4731	4755	24	sand
4755	4785	30	Dolo, anhy
4785	4875	90	Dolo, anhy, red shale
4875	5401	526 TD	Dolo.

Plugged Back To: 4764 FBTD.

FOLD MARK

LOG OF OIL OR GAS WELL.

DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

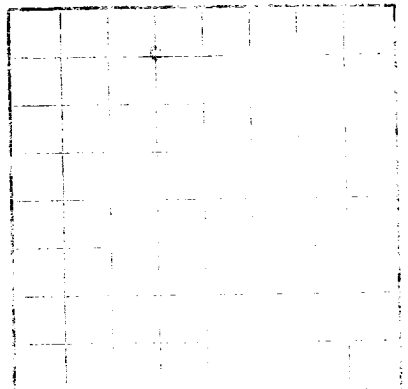

Oil and Gas Company, Inc.
No. 100, Prospect, Texas
Well No. 100, Prospect, Texas
Log of Well No. 100, Prospect, Texas
The well was drilled by the Oil and Gas Company, Inc.
on the 10th day of January, 1910, at Prospect, Texas.
The well was drilled to a depth of 100 feet.
The well was drilled by the Oil and Gas Company, Inc.
on the 10th day of January, 1910, at Prospect, Texas.
The well was drilled to a depth of 100 feet.

OIL OR GAS SANDS OR LENSES

Well fractured 11-16-55 with 6000 gal. sand oil and 9000# sand. Well tested in barrels oil in 5 hours through 3/4" chokes; 390# TP; packer on casing. Test made after load oil recovered.

It is of the greatest importance to have a complete history of the well. Please state in detail the dates of redrilling, together with the reasons for the work and its results. If there were any changes made in the casing, state fully, and if any casing was "sidetracked" or left in the well, give its size and location. If the well has been dynamited, give date, size, position, and number of shots. If plugs or bridges were put in to test for water, state kind of material used, position, and results of pumping or bailing.

HISTORY OF OIL OR GAS WELL.

DATE	DEPTH	TOOL USED	EXPLOSIVE USED	SPILL USED	REMARKS
1910-1-10	0-100	Auger			Drilled to 100 feet.
1910-1-10	100-110	Auger			Drilled to 110 feet.
1910-1-10	110-120	Auger			Drilled to 120 feet.
1910-1-10	120-130	Auger			Drilled to 130 feet.
1910-1-10	130-140	Auger			Drilled to 140 feet.
1910-1-10	140-150	Auger			Drilled to 150 feet.
1910-1-10	150-160	Auger			Drilled to 160 feet.
1910-1-10	160-170	Auger			Drilled to 170 feet.
1910-1-10	170-180	Auger			Drilled to 180 feet.
1910-1-10	180-190	Auger			Drilled to 190 feet.
1910-1-10	190-200	Auger			Drilled to 200 feet.
1910-1-10	200-210	Auger			Drilled to 210 feet.
1910-1-10	210-220	Auger			Drilled to 220 feet.
1910-1-10	220-230	Auger			Drilled to 230 feet.
1910-1-10	230-240	Auger			Drilled to 240 feet.
1910-1-10	240-250	Auger			Drilled to 250 feet.
1910-1-10	250-260	Auger			Drilled to 260 feet.
1910-1-10	260-270	Auger			Drilled to 270 feet.
1910-1-10	270-280	Auger			Drilled to 280 feet.
1910-1-10	280-290	Auger			Drilled to 290 feet.
1910-1-10	290-300	Auger			Drilled to 300 feet.
1910-1-10	300-310	Auger			Drilled to 310 feet.
1910-1-10	310-320	Auger			Drilled to 320 feet.
1910-1-10	320-330	Auger			Drilled to 330 feet.
1910-1-10	330-340	Auger			Drilled to 340 feet.
1910-1-10	340-350	Auger			Drilled to 350 feet.
1910-1-10	350-360	Auger			Drilled to 360 feet.
1910-1-10	360-370	Auger			Drilled to 370 feet.
1910-1-10	370-380	Auger			Drilled to 380 feet.
1910-1-10	380-390	Auger			Drilled to 390 feet.
1910-1-10	390-400	Auger			Drilled to 400 feet.
1910-1-10	400-410	Auger			Drilled to 410 feet.
1910-1-10	410-420	Auger			Drilled to 420 feet.
1910-1-10	420-430	Auger			Drilled to 430 feet.
1910-1-10	430-440	Auger			Drilled to 440 feet.
1910-1-10	440-450	Auger			Drilled to 450 feet.
1910-1-10	450-460	Auger			Drilled to 460 feet.
1910-1-10	460-470	Auger			Drilled to 470 feet.
1910-1-10	470-480	Auger			Drilled to 480 feet.
1910-1-10	480-490	Auger			Drilled to 490 feet.
1910-1-10	490-500	Auger			Drilled to 500 feet.
1910-1-10	500-510	Auger			Drilled to 510 feet.
1910-1-10	510-520	Auger			Drilled to 520 feet.
1910-1-10	520-530	Auger			Drilled to 530 feet.
1910-1-10	530-540	Auger			Drilled to 540 feet.
1910-1-10	540-550	Auger			Drilled to 550 feet.
1910-1-10	550-560	Auger			Drilled to 560 feet.
1910-1-10	560-570	Auger			Drilled to 570 feet.
1910-1-10	570-580	Auger			Drilled to 580 feet.
1910-1-10	580-590	Auger			Drilled to 590 feet.
1910-1-10	590-600	Auger			Drilled to 600 feet.
1910-1-10	600-610	Auger			Drilled to 610 feet.
1910-1-10	610-620	Auger			Drilled to 620 feet.
1910-1-10	620-630	Auger			Drilled to 630 feet.
1910-1-10	630-640	Auger			Drilled to 640 feet.
1910-1-10	640-650	Auger			Drilled to 650 feet.
1910-1-10	650-660	Auger			Drilled to 660 feet.
1910-1-10	660-670	Auger			Drilled to 670 feet.
1910-1-10	670-680	Auger			Drilled to 680 feet.
1910-1-10	680-690	Auger			Drilled to 690 feet.
1910-1-10	690-700	Auger			Drilled to 700 feet.
1910-1-10	700-710	Auger			Drilled to 710 feet.
1910-1-10	710-720	Auger			Drilled to 720 feet.
1910-1-10	720-730	Auger			Drilled to 730 feet.
1910-1-10	730-740	Auger			Drilled to 740 feet.
1910-1-10	740-750	Auger			Drilled to 750 feet.
1910-1-10	750-760	Auger			Drilled to 760 feet.
1910-1-10	760-770	Auger			Drilled to 770 feet.
1910-1-10	770-780	Auger			Drilled to 780 feet.
1910-1-10	780-790	Auger			Drilled to 790 feet.
1910-1-10	790-800	Auger			Drilled to 800 feet.
1910-1-10	800-810	Auger			Drilled to 810 feet.
1910-1-10	810-820	Auger			Drilled to 820 feet.
1910-1-10	820-830	Auger			Drilled to 830 feet.
1910-1-10	830-840	Auger			Drilled to 840 feet.
1910-1-10	840-850	Auger			Drilled to 850 feet.
1910-1-10	850-860	Auger			Drilled to 860 feet.
1910-1-10	860-870	Auger			Drilled to 870 feet.
1910-1-10	870-880	Auger			Drilled to 880 feet.
1910-1-10	880-890	Auger			Drilled to 890 feet.
1910-1-10	890-900	Auger			Drilled to 900 feet.
1910-1-10	900-910	Auger			Drilled to 910 feet.
1910-1-10	910-920	Auger			Drilled to 920 feet.
1910-1-10	920-930	Auger			Drilled to 930 feet.
1910-1-10	930-940	Auger			Drilled to 940 feet.
1910-1-10	940-950	Auger			Drilled to 950 feet.
1910-1-10	950-960	Auger			Drilled to 960 feet.
1910-1-10	960-970	Auger			Drilled to 970 feet.
1910-1-10	970-980	Auger			Drilled to 980 feet.
1910-1-10	980-990	Auger			Drilled to 990 feet.
1910-1-10	990-1000	Auger			Drilled to 1000 feet.