


N.

NEW MEXICO OIL CONSERVATION COMMISSION

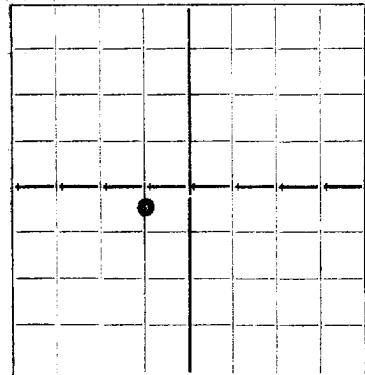

DUPLICATE

Santa Fe, New Mexico

WELL RECORD

RECEIVED
HOBBS OFFICE

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

THE OHIO OIL COMPANY
State Warn Ac/2 Company or Operator Well No. 6 in NE/4SW/4 of Sec. 6, T. 18 S
Lease R. 35 E N. M. P. M. Vacuum Field, Lea County.
Well is 2310 feet South of the North line and 1980 feet East of the East line of Section 6
If State land the oil and gas lease is No. B-1113 Assignment No.
If patented land the owner is Address
If Government land the permittee is Address
The Lessee is Address
Drilling commenced March 29th 19 40 Drilling was completed May 1, 1940 19
Name of drilling contractor Oil Well Drlg. Co. Address
Elevation above sea level at top of casing 3990 feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES
No. 1, from Pay to 4690 (TD) No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS
Include data on rate of water inflow and elevation to which water rose in hole.
No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
10-3/4"	40	8	Regular	435	Common			
5 1/2"	15	8	Regular	4097	Float			

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/8"	10 3/4"	495	200	Halliburton		
8-1/8"	5 1/2"	4097	400	Halliburton		

PLUGS AND ADAPTERS
Heaving plug—Material Length Depth Set
Adapters—Material Size

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS
If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED
Rotary tools were used from 0 feet to TD feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION
Put to producing May 16 19 40
The production of the first 6 hours was 68 BO/PH barrels of fluid of which 100 % was oil; -- % emulsion; -- % water; and -- % sediment. Gravity, Be 37
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES
A. D. Smith Driller C. E. Rylon Driller
O. E. Gell Driller

FORMATION RECORD ON OTHER SIDE
I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 3rd day of May 19 40
Notary Public
My Commission expires March 2, 1941
Place May 3, 1940 Date
Name O. E. Province
Position Foreman
Representing The Ohio Oil Company Company or Operator
Address Box 1607, Hobbs, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	54	54	Surface Lime
54	220	166	Sand, Shells and Shale
220	405	185	Sand, Redrock and Redbeds
405	940	535	Redbeds and Shells
940	1210	270	Redbeds, Redrock and Shale
1210	1355	145	Redrock
1355	1420	65	Redrock and Shells
1420	1442	22	Redrock and Anhydrite
1442	1500	58	Redrock and Shells
1500	1605	105	Anhydrite
1605	1640	35	Salt and Shale
1640	1760	120	Salt and Shells
1760	1960	200	Salt, Anhydrite and Shells
1960	2655	695	Salt and Anhydrite
2655	2805	150	Anhydrite and Gypsum
2805	2880	75	Anhydrite
2880	2910	30	Anhydrite, Shale and Gypsum
2910	2940	30	Anhydrite and Gypsum
2940	2990	50	Anhydrite
2990	3055	65	Anhydrite, Shale and Gypsum
3055	3117	62	Anhydrite and Gypsum
3117	3135	18	Anhydrite, Gypsum and Sand, Brown Lime
3135	3157	22	Anhydrite and Gypsum
3157	3185	28	Anhydrite
3185	3317	132	Anhydrite and Gypsum
3317	3370	53	Anhydrite
3370	3403	33	Anhydrite and Gypsum
3403	3430	27	Anhydrite
3430	3492	62	Anhydrite and Gypsum
3492	3519	27	Anhydrite
3519	3566	37	Anhydrite and Gypsum
3566	3586	20	Anhydrite
3586	3642	56	Anhydrite and Gypsum
3642	3671	29	Anhydrite
3671	3729	58	Anhydrite and Gypsum
3729	3761	32	Anhydrite
3761	3773	12	Brown Lime and Anhydrite
3773	3794	21	Anhydrite, Lime and Gypsum
3794	3832	38	Anhydrite and Lime
3832	3836	4	Anhydrite, Lime and Gypsum
3836	3874	38	Anhydrite and Lime
3874	3898	24	Anhydrite, Lime and Shale
3898	3918	20	Lime and Gypsum
3918	3938	20	Anhydrite, Lime and Gypsum
3938	4496	558	Lime
4496	4540	44	Lime and Sand
4540	4690 (TD)	150	Lime