

FORM C-105

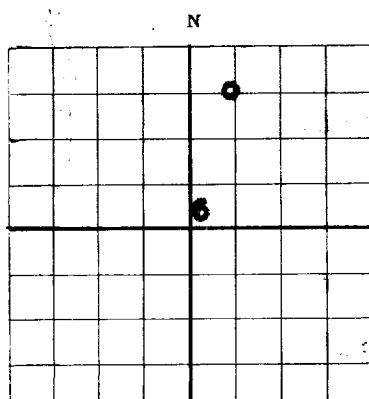
## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

HOBBS OFFICE

WELL RECORD

DUPLICATE

AREA 640 ACRES  
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

The Texas Company

Drawer "K"

Wink, Texas

Company or Operator  
State N.M. "R" Well No. 2 in NW 1-NE 1 of Sec. 6, T. 18S  
Lease  
R. 35E, N. M. P. M., Vacuum Field, Lea County.  
Well is 660 feet south of the North line and 1980 feet west of the East line of Sec 6  
If State land the oil and gas lease is No. B-1506 Assignment No.  
If patented land the owner is Address  
If Government land the permittee is Address  
The Lessee is The Texas Company Address Box 2332, Houston, Tex.  
Drilling commenced July 4th, 1938 Drilling was completed August 10th 1938  
Name of drilling contractor Gardner Bros. Address Dallas, Texas  
Elevation above sea level ~~3082~~ 3082 feet. at derrick floor  
The information given is to be kept confidential until 19

## OIL SANDS OR ZONES

No. 1, from 4490 to 4540 0 No. 4, from to  
No. 2, from 4540 to 4675 0 No. 5, from to  
No. 3, from to No. 6, from to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.  
No. 2, from to feet.  
No. 3, from to feet.  
No. 4, from to feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10-3/4"	32.75#	8	L.W.	241'	Regular Pattern				
7-5/8"	26.40#	8	L.W.	1525'	Baker Guide				
5-1/2"	17.0#	10	Smls.	4103'	"	"			

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
	10-3/4	257	200	Halliburton		
	7-5/8"	1536	250	"		
	5-1/2"	4103	200	"		

## PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set  
Adapters—Material Size

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from 0 feet to 4675 feet, and from feet to feet  
Cable tools were used from feet to feet, and from feet to feet

## PRODUCTION

Put to producing August 10th 1938 On Test  
The production of the first 24 hours was 151 barrels of fluid of which 100 % was oil; %  
emulsion; % water; and % sediment. Gravity, Be 36.4  
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas  
Rock pressure, lbs. per sq. in. Gas Oil Ratio 1525

## EMPLOYEES

N.W. Eaton Driller T.W. Clark Driller  
M.W. Alexander Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 30th

Wink, Texas 8-30-38

day of August 19 38

Name

Position District Superintendent

Representing The Texas Company

My Commission expires 5-31-39

Address Drawer "K" Wink, Texas.