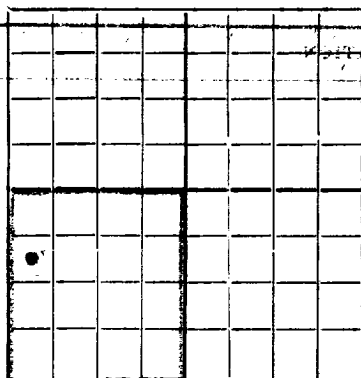


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

PAGE 1

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Gypsy Oil Company

North Grimes

Company or Operator

Lease

Well No. 3 in SW NW SW of Sec. 21 T. 18S

R. 38E, N. M. P. M., Hobbs Field, Lea County.

Well is 990 feet south of the North line and 2519 feet west of the East line of SW/4

If State land the oil and gas lease is No. - Assignment No. -

If patented land the owner is - Address -

If Government land the permittee is - Address -

The Lessee is Gypsy Oil Company Address Tulsa, Oklahoma.

Drilling commenced October 25th, 1935 Drilling was completed November 30th, 1935

Name of drilling contractor Loffland Bros. Address Tulsa, Oklahoma.

Elevation above sea level at top of casing 3650 feet.

The information given is to be kept confidential until 7 19

OIL SANDS OR ZONES

No. 1, from 4198' to 4235' No. 4, from - to -

No. 2, from - to - No. 5, from - to -

No. 3, from - to - No. 6, from - to -

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from ? Rotary Hole to - feet.

No. 2, from - to - feet.

No. 2, from - to - feet.

No. 4, from - to - feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
13" OD	48	8	Seam.	295'	?			
7" OD	24	10	Seam.	4106'	?			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2"	13"	295'	250	Halliburton		
8-5/8"	7"	4106'	1300	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material - Length - Depth Set -

Adapters—Material - Size -

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Hydro. Acid	2000 gal.	11-27-35	4235'	
		Hydro. Acid	5000 gal.	11-30-35	4235'	

Results of shooting or chemical treatment Increased production.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0' feet to 4235' feet, and from - feet to - feet

Cable tools were used from - feet to - feet, and from - feet to - feet

PRODUCTION

Put to producing November 26th, 1935

The production of the first 24 hours was 16,725 barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be -

If gas well, cu. ft. per 24 hours 16,720,000 Gallons gasoline per 1,000 cu. ft. of gas -

Rock pressure, lbs. per sq. in. -

EMPLOYEES

Driller - Driller -

Driller - Driller -

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 12th,

Tulsa, Oklahoma December 12th, 1935

day of December, 1935

Name -

Position General Superintendent

Representing Gypsy Oil Company

Company or Operator

My Commission expires March 16, 1936

Address Tulsa, Oklahoma.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0'	208'		Surface, shells and sand
	283		Shells
	833	CRDOSH	Red Bed
	1498		Red Bed and shells
	1544		Red Bed and Hard sand shells
	1618		Red Bed and shells
	1703		Anhydrite
	1804		Red Bed and Anhydrite
	1882		Shells and Anhydrite
	1922		Anhydrite and salt
	2895		Anhydrite, shells and salt
	2918		Lime and anhydrite
	2937		Anhydrite
	3046		Lime and anhydrite
	3187		Lime and anhydrite
	3198		Anhydrite
	3228		Lime, Anhydrite and Potash
	3259		Anhydrite and potash
	3332		Anhydrite and lime
	3399		Anhydrite
	3432		Lime and Anhydrite
	3455		Broken Anhydrite
	3467		Anhydrite
	3552		Anhydrite and lime
	3553		Anhydrite and potash
	3706		Lime and Anhydrite
	3734		Lime, potash and anhydrite
	3801		Anhydrite and lime
	3823		Anhydrite
	3890		Lime and Anhydrite
	3904		Broken Anhydrite
	3980		Anhydrite and lime
	4002		Anhydrite
	4024		Lime and Anhydrite
	4047		Lime
	4092		Lime and Anhydrite
	4198		Lime
	4235		Terry lime