


	X	

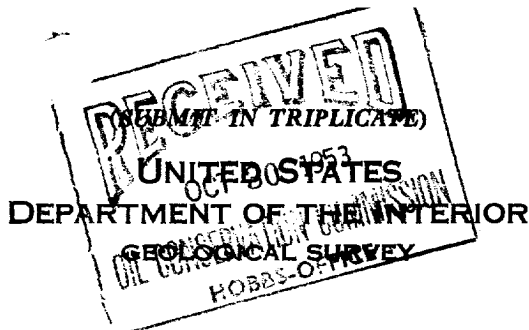

Field Office Las Cruces
Lease No. 032233 (B)
Unit CC
Humble No. 163110
Federal Bowers B

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL		SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL	X		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Hobbs, New Mexico October 28, 1953

Well No. 4 is located 1980 ft. from S line and 1980 ft. from E line of sec. 25

NW 1/4 of SE 1/4 T-18-S R-38-E
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
East Hobbs (San Andres) Lee New Mexico
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 3622 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Set cast iron bridging plug at 3800' in 5-1/2" casing. Squeeze perforations from 3842 to 3872' with a minimum of 50 sacks neat cement under bridge plug. Attempt to shoot off 5-1/2" casing at 3350' and pull same.
Spot 100 foot cement plug at top of 5-1/2" casing left in hole.
Spot 100 foot cement plug at bottom of 8-5/8" casing and 20 foot cement plug in top of 8-5/8" casing at surface.

Place marker in accordance with regulations.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Humble Oil & Refining Company

Address Box 2347, Hobbs, New Mexico

By Mr. M. J. [Signature]

Title District Superintendent