


DUPLICATE

N.

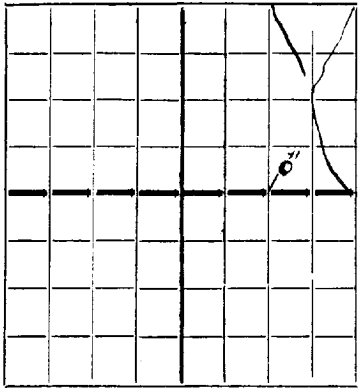

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO STATE LAND OFFICE

SANTA FE, NEW MEXICO

DEPARTMENT OF THE STATE GEOLOGIST

WELL RECORD

Mail to State Geologist, Santa Fe, New Mexico, not more than ten days
after completion of well. Indicate questionable data by
following it with (?). Submit in duplicate.

Company J. P. Cusack, Inc. Address Box 957, Ardmore, Oklahoma
Send correspondence to Samedan Oil Corp. Address Box 957, Ardmore, Oklahoma
Moon "B" Well No. 1 in NE 1/4 of Sec. 28 T. 18S
R. 38E, N. M. P. M., Hobbs Oil Field Lea County.
If State land the oil and gas lease is No. _____ Assignment No. _____
If patented land the owner is J. H. Moon Address Tatum, N.M.
The lessee is J. H. Moon et al Address Tatum, N.M.
If not state or patented land, give status _____
Drilling commenced April 18 1935 Drilling was completed May 28 1935
Name of Drilling contractor Noble Drilling Co. Address Tulsa, Oklahoma
Elevation above sea level at top of casing 3648 feet.
The information given is to be kept confidential until _____ 19____

OIL SANDS OR ZONES

No. 1, from 4160 to 4216 No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	TO	Purpose
<u>12 1/2</u>	<u>50#</u>			<u>235</u>					<u>Surface</u>
<u>7"</u>	<u>22#</u>			<u>4020</u>					

MUDDING AND CEMENTING RECORD

SIZE	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
<u>12 1/2</u>	<u>235</u>	<u>150</u>	<u>Halliburton</u>		
<u>7"</u>	<u>4020</u>	<u>5000</u>	<u>do.</u>		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

SIZE	SHELL USED	EXPLOSIVE USED	QUANTITY	DATED	DEPTH SHOT	DEPTH CLEANED OUT

TOOLS USED

Rotary tools were used from 0 feet to 4216 feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing 6-10 1935
The production of the first 24 hours was 30 bbls/hr. barrels of fluid of which 100 % was oil; _____ %
emulsion; _____ % water; and _____ % sediment. Gravity, Be _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. 1200

EMPLOYEES

P. L. Kinsey Driller Fred Traugott Driller
A. T. Hopkins Driller J. H. Forrester Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all
work done on it so far as can be determined from available records.
Subscribed and sworn to before me this 20th
day of July 1935
Harry H. Revell
Notary Public.
My commission expires Nov. 7, 1937
Name W. B. Biddick
Position Supt.
Representing J. P. Cusack, Inc.
Company or Employer _____

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	60		Caliche & sand
60	220		Sand and gravel
220	235		Red beds
235	976		Red beds
976	1260		Red rock and shells
1260	1390		Red rock and red beds
1390	1415		Bkn. anhydrite
1415	1440		Gyp
1440	1478		Anhydrite and red rock
1478	1543		Red shale and shells
1543	1620		Anhydrite and red rock
1620	1737		Anhydrite and gyp
1737	1785		Shale, Anhydrite shells & salt
1785	1832		Salt
1832	2017		Anhydrite and salt
2017	2045		Red bed and anhydrite shells
2045	2219		Salt, anhydrite and potash
2219	2728		Salt and anhydrite
2728	2937		Anhydrite
2937	2963		Anhydrite and lime
2963	2973		Anhydrite
2973	2980		Anhydrite & atks. of brown sandy lime- small show gas
2980	2999		Anhydrite
2999	3014		Brown lime
3014	2066		Anhydrite
2066	3205		Anhydrite & lime
3205	3243		Anhydrite & lime
3243	3555		Anhydrite
3555	3572		Anhydrite & bkn. lime
3572	3609		Anhydrite
3609	3640		Lime & Anhydrite
3640	3825		Bkn. lime & anhydrite
3825	3850		Lime
3850	3990		Lime and anhydrite
3990	4014		Sandy lime
4014	4029		Lime- set pipe
4029	4035		Gray lime & anhydrite
4035	4045		Brown Lime
4045	4065		Lime
4065	4067		Anhydrite
4067	4080		Lime- 4071-80 drilling 2 1/2' in 45 min.
4080	4083		Lime- showing gas drilled 2 1/2' in 20 "
4083	4094		Lime " 2 1/2' in 50 "
4094	4102		Lime- showing gas " 2 1/2' in 20 "
4102	4117		Gray sandy lime " 2 1/2' in 45 "
4117	4150		Gray sandy lime
4150	4157		White lime
4157	4187		White lime- saturated - pay
4187	4216		Hard whit lime - little saturation below 4187; increasing hardness
	4216		T. D.