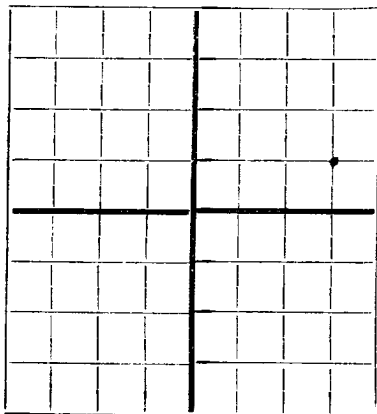



N

AREA 640 ACRES  
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION  
Santa Fe, New Mexico

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Cities Service Oil Company Hobbs, New Mexico  
Company or Operator Address  
Fowler Well No. 6 in C SE NE of Sec. 31, T. 18S  
Lease  
R. 38E, N. M. P. M., Bowers Field, Lea County.  
Well is 1980 feet south of the North line and 660 feet west of the East line of Sec. 31-18S-38E  
If State land the oil and gas lease is No. -- Assignment No. --  
If patented land the owner is Clara Fowler Address Hobbs, New Mexico  
If Government land the permittee is -- Address --  
The Lessee is Cities Service Oil Company Address Empire-Masonic Bldg., Bartlesville, Oklahoma  
Drilling commenced December 16, 1947. Drilling was completed December 30, 1947  
Name of drilling contractor Two-States Drilling Company Address Dallas, Texas  
Elevation above sea level at top of casing 3647 feet.  
The information given is to be kept confidential until --- 19---

## OIL SANDS OR ZONES

No. 1, from 3205' to 3235' No. 4, from -- to --  
No. 2, from -- to -- No. 5, from -- to --  
No. 3, from -- to -- No. 6, from -- to --

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from -- to -- feet. --  
No. 2, from -- to -- feet. --  
No. 3, from -- to -- feet. --  
No. 4, from -- to -- feet. --

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
3 1/8"	25.5	8R	SS	3235'					
5 1/2"	14 1/2	8R	SS	3165'					
2" EUE	4.7	8R	SS	3224'	set at	3230'			

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
11 1/2"	8 5/8"	290'	175	Plug	--	--
7 3/4"	5 1/2"	3173'	600	Plug	--	--

## PLUGS AND ADAPTERS

Heaving plug—Material -- Length -- Depth Set --  
Adapters—Material -- Size --

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment The well was neither shot nor acidized.

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto. None

## TOOLS USED

Rotary tools were used from 0 feet to 3235 feet, and from -- feet to -- feet  
Cable tools were used from -- feet to -- feet, and from -- feet to -- feet

## PRODUCTION

Put to producing December 30, 1947.  
The production of the first 24 hours was 47.65 barrels of fluid of which 100% was oil; --% emulsion; --% water; and --% sediment. Gravity, Be. 42.2  
If gas well, cu. ft. per 24 hours -- Gallons gasoline per 1,000 cu. ft. of gas. --  
Rock pressure, lbs. per sq. in. --

## EMPLOYEES

--, Driller --, Driller  
--, Driller --, Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 6th

day of January, 1948

Notary Public

My Commission expires March 12, 1951

Hobbs, New Mexico January 6, 1948

Name

Position District Superintendent

Representing Cities Service Oil Company

Company or Operator

Address Drawer G., Hobbs, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0'	204'	204'	Soil and caliche
204'	1495'	1291'	Red bed
1495'	1682'	187'	Red bed and anhydrite
1682'	1755'	73'	Anhydrite
1755'	1882'	127'	Anhydrite and salt
1882'	2030'	148'	Red bed and anhydrite
2030'	2750'	720'	Anhydrite and salt
2750'	2825'	75'	Anhydrite and gypsum
2825'	2884'	59'	Anhydrite and salt, gypsum
2884'	3170'	286'	Anhydrite
3170'	3235'	65'	Lime and anhydrite
			Anhydrite 1460'
			Yates 2710'
			Lime 2790'
			Bowers Sand 3170'
			Top Pay 3205'