

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

MISCELLANEOUS NOTICES

Submit this notice in TRIPLICATE to the District Office, Oil Conservation Commission, before the work specified is to begin. A copy will be returned to the sender on which will be given the approval, with any modifications considered advisable, or the rejection by the Commission or agent, of the plan submitted. The plan as approved should be followed, and work should not begin until approval is obtained. See additional instructions in the Rules and Regulations of the Commission.

Indicate Nature of Notice by Checking Below

NOTICE OF INTENTION TO CHANGE PLANS		NOTICE OF INTENTION TO TEMPORARILY ABANDON WELL		NOTICE OF INTENTION TO DRILL DEEPER	
NOTICE OF INTENTION TO PLUG WELL		NOTICE OF INTENTION TO PLUG BACK		NOTICE OF INTENTION TO SET LINER	
NOTICE OF INTENTION TO SQUEEZE		NOTICE OF INTENTION TO ACIDIZE		NOTICE OF INTENTION TO SHOOT (Nitro)	
NOTICE OF INTENTION TO GUN PERFORATE		NOTICE OF INTENTION (OTHER)		NOTICE OF INTENTION (OTHER) Repr. Csg. Leak	X

OIL CONSERVATION COMMISSION
SANTA FE, NEW MEXICO

Hobbs, N.M.
(Place)

March 15, 1954
(Date)

Gentlemen:

Following is a Notice of Intention to do certain work as described below at the West Grimes

Gulf Oil Corporation
(Company or Operator)

Well No. 1 in D
(Unit)

NW 1/4 NW 1/4 of Sec. 32, T. 18-S, R. 38-E, NMPM., Hobbs Pool
(40-acre Subdivision)

Lea County.

FULL DETAILS OF PROPOSED PLAN OF WORK
(FOLLOW INSTRUCTIONS IN THE RULES AND REGULATIONS)

Re: ~~REGUL~~ C-102 to repair 9-5/8" OD Casing Leak

While attempting to repair 9-5/8" OD casing leak, a leak was detected in the 6-5/8" casing. Propose to repair leak in 6-5/8" casing using the following procedure:

1. Run bridge plug and set in base of 6-5/8" casing
2. Locate 6-5/8" leak
3. Run cement retainer and set above leak
4. Pump cement through 6-5/8" casing leak until cement circulates to the surface of 6-5/8" - 9-5/8" annulus
5. Wait on cement
6. Drill out cement and pressure test 6-5/8" casing
7. Drill out bridge plug and return well to production.

Approved....., 19.....
Except as follows:

See Reverse side for approval exceptions

Approved
OIL CONSERVATION COMMISSION

By.....

Title.....

Gulf Oil Corporation
Company or Operator

By S. J. Joy

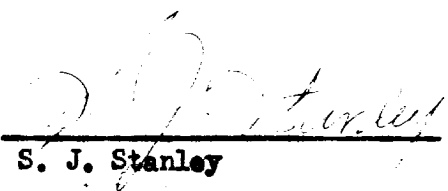
Position Area Prod. Supt.
Send Communications regarding well to:

Name Gulf Oil Corp.

Address Box 2167, Hobbs, N.M.

This form is approved with the following proviso:

1. After squeezing off the uppermost leak in the casing operator will drill out retainer and test pipe for additional leaks in the oil string and repair pipe by squeeze operations. This operation to be continued until all leaks in oil string are repaired and pipe will stand 1000 # of dead weight tester for 1/2 hr. without a pressure drop from blow-out preventer to bottom hole plug.
2. Cement should circulate between 6-5/8" and 9-5/8". If cement fails to circulate conduct temperature survey reporting top of cement and pressure test of 9-5/8 - 6-5/8 annulus with 500 # for 1/2 hr.
3. Pressure test in Par. 2 will be witnessed and before applying pressure, please notify the undersigned.


S. J. Stanley