

Santa Fe, New Mexico


# DEPARTMENT OF THE STATE GEOLOGIST

## NOTICE OF INTENTION TO DRILL NEW WELL

Notice must be given to the State Geologist or to the proper Oil and Gas Inspector and approval obtained before drilling begins. If changes in the proposed plan are considered advisable a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval.

Mr. E.H. Wells, State Geologist. Hobbs, N. Mex., Sept. 12, 1932

Dear Sir: You are hereby notified that it is our intention to commence the drilling of a well to be known as East Grimes Well No. Two (2) in SE 1/4 NE 1/4 of Sec. 33 T. 18S, R. 38E, N. M. P. M., Hobbs Oil Field \_\_\_\_\_ County

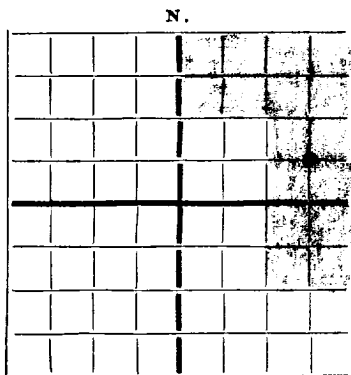

AREA 640 ACRES

LOCATE WELL CORRECTLY

The well is 1980 feet (xxx of North line and 660 feet (xxxx (W.)

of East line of Section 33-18-38  
(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. \_\_\_\_\_  
Assignment No. \_\_\_\_\_

If patented land the owner is W.D. Grimes  
Address Lubbock, Texas

The lessee is Gypsy Oil Company Address Box 661, Tulsa, Oklahoma  
The elevation of the derrick floor above sea level is 3630 feet. We propose to drill well with No. Rotary Tools  
Make of Drill \_\_\_\_\_

We propose to use the following strings of casing and to land or cement them as indicated.

Size of Casing	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented
<u>13-5/8"</u>	<u>54.5</u>	<u>New</u>	<u>230'</u>	<u>Cemented</u>
<u>9-5/8"</u>	<u>36</u>	<u>New</u>	<u>2750'</u>	<u>Cemented</u>
<u>6-5/8"</u>	<u>24.3</u>	<u>New</u>	<u>3975'</u>	<u>Cemented</u>

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 2785 feet.

Additional information: Well in all probability will be mudded up at an approximate depth of 3175', and will be drilled in with clear water. All casing strings after cemented will be tested by bailer method. Will finish hole with 6-1/4" bit.

Approved Sept 14, 1932  
Except as follows:

State Geologist or Oil and Gas Inspector.

Sincerely yours,

GYPSY OIL COMPANY

Company or Operator.

By C.C. Cummings  
Position District Superintendent  
Send communication regarding well to  
Name S.G. Sanderson  
Address Box 661, Tulsa, Oklahoma

A. Stanley