


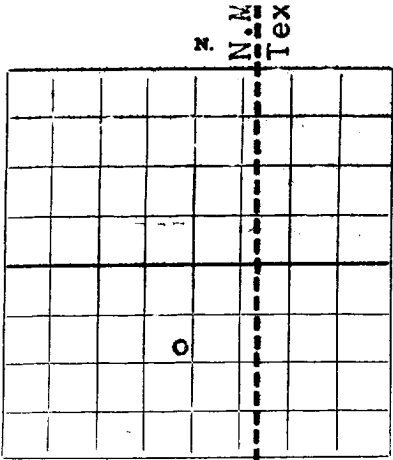

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

MORRIS R. ANTWEIL, OIL OPERATOR
(Company or Operator)

DAVIS
(Lease)

Well No. 1, in NE 1/4 of SW 1/4, of Sec. 29, T. 18 S, R. 39 E, NMPM.
East Hobbs Pool, Lea County.

Well is 2310 feet from West line and 1650 feet from South line
of Section 29. If State Land the Oil and Gas Lease No. is

Drilling Commenced February 18, 1953. Drilling was Completed March 12, 1953.

Name of Drilling Contractor Makin Drilling Company

Address P. O. Box 1628 -- Hobbs, New Mexico

Elevation above sea level at Top of Tubing Head 3590' Ground Level 3600' Rotary Table
Not confidential.....

OIL SANDS OR ZONES

No. 1, from 3917' to 3961' (Gas) No. 4, from
No. 2, from 4450' to 4458' (Oil) No. 5, from
No. 3, from No. 6, from

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 0 to 240' (Rotary Hole) feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13"OD	50#	Used	263'	Tex. Pat.	---	---	Sur. WSO
8-5/8"OD	32#	Used	1858'	FL.SH.& BAF.Coll.	---	Cement	off Redbeds 3
5-1/2"OD	17#	New	4438'	FormPkr.Shoe	---	---	Salt Section Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17-1/2"	13"OD	276'	200	Cir. to Sur.	9.5 lbs.	Normal
11"	8-5/8"	1866'	300	Bumped Plug	10.2 lbs.	Normal
7-7/8"	5-1/2"	4444'	175	Bumped Plug	11.2 lbs.	Normal

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

No production stimulation - Well completed natural.

Result of Production Stimulation

Depth Cleaned Out

I ORD OF DRILL-STEM AND SPECIAL TES

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 4458 feet, and from --- feet to --- feet.
Cable tools were used from --- feet to --- feet, and from --- feet to --- feet.

PRODUCTION

Put to Producing March 12, 1953

OIL WELL: The production during the first 24 hours was 1026.72 barrels of liquid which 99.8% was oil; ---% was emulsion; ---% water; and 0.2% was sediment. A.P.I. Gravity 33 degrees.

GAS WELL: The production during the first 24 hours was --- M.C.F. plus --- barrels of liquid Hydrocarbon. Shut in Pressure --- lbs.

Length of Time Shut in ---

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico			Northwestern New Mexico		
T. Anhy.	1832' (/1768')		T. Devonian		
T. Salt.	1930' (/1670')		T. Silurian		
B. Salt.	2930' (/ 670')		T. Montoya		
T. Yates.	3028' (/ 572')		T. Simpson		
T. 7 Rivers.	-----		T. McKee		
T. Queen.	3925' (- 325')		T. Eilenburger		
T. Grayburg	4297' (- 697')		T. Gr. Wash.		
T. San Andres	4448' (- 848')		T. Granite		
T. Glorieta			T. ---		
T. Drinkard			T. ---		
T. Tubbs			T. ---		
T. Abo			T. ---		
T. Penn.			T. ---		
T. Miss.			T. ---		

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	240		Caliche & Sur. Sands				
240	1832		Redbeds				
1832	1930		Anhydrite				
1930	2930		Salt w/stringer of Anhy.				
2930	3028		Anhydrite and Lime				
3028	3925		Anhydrite				
3925	3970		Anhydrite and Sand				
3970	4297		Anhydrite and Lime				
4297	4448		Dolomite and Sand				
4448	4458		Soft and buff colored oolitic dolomite with good standing in porosity				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

March 14, 1953
Company or Operator MORRIS E. ANTWEIL, CO Address P. O. Box 1000, Hobbs, N. Mex.
Name J. W. Adams Position or Title Agent