


N.

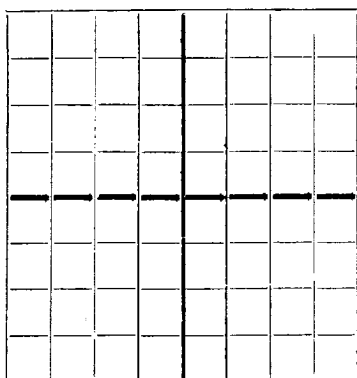

NEW MEXICO STATE LAND OFFICE

SANTA FE, NEW MEXICO

DEPARTMENT OF THE STATE GEOLOGIST

WELL RECORD

Mail to State Geologist, Santa Fe, New Mexico, not more than ten days
after completion of well. Indicate questionable data by
following it with (?). Submit in duplicate.

AREA 640 ACRES
LOCATE WELL CORRECTLY

Company Shell Petroleum Corporation Address Box P, Hobbs, New Mex
Send correspondence to Shell Petroleum Corp Address Box P Hobbs New Mex
B H Turner Well No. 2 in NW 1/4 of NE 1/4 of Sec. 34, T. 18-S
R. 38-E, N. M. P. M., Hobbs Oil Field Lea County.
If State land the oil and gas lease is No. _____ Assignment No. _____
If patented land the owner is B H Turner Address Hobbs, New Mex
The lessee is Shell Petroleum Corp Address Houston Texas
If not state or patented land, give status _____
Drilling commenced July 18 19 35 Drilling was completed Sept 1 19 35
Name of Drilling contractor Farley & Rains Drilling Co Address Midland, Texas
Elevation above sea level at top of casing 3636 feet.
The information given is to be kept confidential until Not confidential 19 _____

OIL SANDS OR ZONES

No. 1, from 4185 to 4200 No. 4, from _____ to _____
No. 2, from 4255 to 4241 No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	Purpose
<u>12 1/2"</u>	<u>50</u>	<u>8</u>	<u>SH</u>	<u>282</u>	<u>Texas Pattern</u>			<u>Surface Casing</u>
<u>9-5/8"</u>	<u>36</u>	<u>8</u>	<u>Pittsburg</u>	<u>1700</u>	<u>Baker Float</u>			<u>Intermediate casing</u>
<u>7"</u>	<u>24</u>	<u>10</u>	<u>J&L</u>	<u>4134</u>	<u>Baker Float</u>			<u>Oil String</u>

MUDDING AND CEMENTING RECORD

SIZE	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
<u>12 1/2"</u>	<u>282</u>	<u>150</u>	<u>Halliburton</u>	<u>9#/Gal</u>	<u>Formation mud</u>
<u>9-5/8"</u>	<u>1700</u>	<u>625</u>	<u>"</u>	<u>10#/Gal</u>	<u>" "</u>
<u>7"</u>	<u>4134</u>	<u>300</u>	<u>"</u>	<u>9#/Gal</u>	<u>" "</u>

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

SIZE	SHELL USED	EXPLOSIVE USED	QUANTITY	DATED	DEPTH SHOT	DEPTH CLEANED OUT
			<u>2000 Gal</u>	<u>8-26-35</u>	<u>4135-4226</u>	
			<u>1000 Gal</u>	<u>8-27-35</u>	<u>"</u>	<u>"</u>
			<u>1000 Gal acid</u>	<u>9-4-35</u>	<u>4135-4241</u>	
			<u>2000 Gal acid</u>	<u>9-7-35</u>	<u>4135-4241</u>	
			<u>6000 Gal acid</u>	<u>9-10-35</u>	<u>"</u>	<u>"</u>

TOOLS USED

Rotary tools were used from 0 feet to 4241 feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing 9/14 19 35
The production of the first 24 hours was 3770 barrels of fluid of which 100 % was oil; _____ %
emulsion; _____ % water; and _____ % sediment. Gravity, Be. 34.60 @ 69° F.
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

_____, Driller _____, Driller
_____, Driller _____, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all
work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 7day of Jan 19 36Patricia Mahoney
Notary Public.Name R. J. SchellPosition District EngineerRepresenting Shell Petroleum Corp.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	60	60	Caliche
60	105	45	Sand
105	125	20	Gravel
125	173	48	Lime
173	235	62	Sandy Shale
235	259	24	Sandy
259	1492	1233	Red Beds
1492	1675	183	Red & Blue Shale
1675	1782	107	Anhy
1782	1875	93	Red Bed
1875	1889	14	Anhy
1889	1928	39	Salt
1928	2750	822	Salt & Anhy.
2750	2897	147	Anhy
2897	2975	78	Anhy & Lime
2975	3101	126	Anhy
3101	3615	514	Anhy
3615	3680	65	Sandy Lime
3680	3760	80	Anhy
3760	3768	8	Gray Lime
3768	3797	19	Brown Sandy Lime
3797	3841	44	Anhy & Lime
3841	3870	29	Anhy
3870	3880	10	Gray Lime
3880	4085	205	Anhy & Lime
4085	4167	82	Sandy Lime
4167	4175	8	White Lime
4175	4180	5	Sandy Lime
4180	4241	61	White Crystalline Lime
TD	4241		