

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

NEW MEXICO OIL CONSERVATION COMMISSION

Form C-103
Supersedes Old
C-102 and C-103
Effective 1-1-65

5a. Indicate Type of Lease
State <input checked="" type="checkbox"/> Fee <input type="checkbox"/>
5. State Oil & Gas Lease No.
E-580

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR.
USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>	7. Unit Agreement Name
2. Name of Operator Gulf Oil Corporation	8. Farm or Lease Name Lea "FE" State
3. Address of Operator Box 670, Hobbs, New Mexico 88240	9. Well No. 7
4. Location of Well UNIT LETTER D , 790 FEET FROM THE North LINE AND 790 FEET FROM THE West LINE, SECTION 11 TOWNSHIP 17-S RANGE 34-E NMPM.	10. Field and Pool, or Wildcat North Vacuum Abo
15. Elevation (Show whether DF, RT, GR, etc.) 4097' AL	12. County Lea

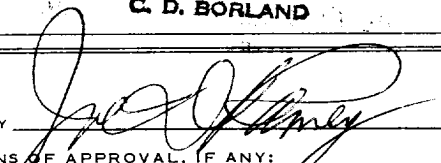

16. Check Appropriate Box To Indicate Nature of Notice, Report or Other Data	
NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input checked="" type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	CASING TEST AND CEMENT JOB <input checked="" type="checkbox"/>
OTHER <input type="checkbox"/>	OTHER <input type="checkbox"/>
PLUG AND ABANDON <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
CHANGE PLANS <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

Abbott Brothers drilled 17" hole with Rat Hole machine to 27'. Set 1 joint, 31' of 13-3/8" OD 48# H-40 casing at 27' and cemented to surface with 2 yards ready mix concrete.

McVay Drilling Company spudded 12-1/4" hole at 8:30 PM, April 28, 1971. Drilled to 1693'. Ran 52 joints, 1665' of 8-5/8" OD 2 1/2" K-55 S&W-C casing set and cemented at 1681' with 620 sacks of Class C cement with 4% gel and 200 sacks of Class C with 2% Ca C12. Cement Circulated. WOC & NU 18 hours. Tested casing with 1500#, 30 minutes, OK.

Started drilling 7-7/8" hole at 1693' at 5:35 PM, April 30, 1971.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.		
ORIGINAL SIGNED BY C. D. BORLAND	TITLE Area Production Manager	DATE May 3, 1971
SIGNED 		
APPROVED BY 	TITLE SUPERVISOR DISTRICT	DATE MAY 5 1971
CONDITIONS OF APPROVAL, IF ANY:		

RECEIVED

MAY 4 1971

OIL CONSERVATION COMM.
HOBBS, N. M.