



STATE OF NEW MEXICO  
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT

OIL CONSERVATION DIVISION  
HOBBS DISTRICT OFFICE

GOVERNOR

POST OFFICE BOX 1980  
HOBBS, NEW MEXICO 88241-1980  
(505) 393-6161

OIL CONSERVATION DIVISION  
P. O. BOX 2088  
SANTA FE, NEW MEXICO 87501

6 FX-650  
2/14/86

RE: Proposed:

MC \_\_\_\_\_  
DHC \_\_\_\_\_  
NSL \_\_\_\_\_  
NSP \_\_\_\_\_  
SWD \_\_\_\_\_  
WFX \_\_\_\_\_  
PMX \_\_\_\_\_

Gentlemen:

I have examined the application for the:

Operator \_\_\_\_\_ Lease & Well No. \_\_\_\_\_ Unit \_\_\_\_\_ S-T-R \_\_\_\_\_

and my recommendations are as follows:

OK

Yours very truly,

Jerry Sexton  
Supervisor, District 1

/ed

**MEWBOURNE OIL COMPANY**

P.O. BOX 7698  
TYLER, TEXAS 75711  
903 - 561-2900  
FAX 903 - 561-1870

January 24, 1996

CERTIFIED MAIL  
RETURN RECEIPT REQUESTED  
NO. Z 079 526 648

State of New Mexico  
Oil Conservation Division  
P. O. Box 1980  
Hobbs, New Mexico 88240

Re: Application for Authority to Inject  
Querecho Plains Queen Associated  
Sand Unit Well No. 2  
Lea County, New Mexico

Gentlemen:

Attached is Mewbourne Oil Company's application requesting approval to inject water into the referenced formation. Any objections to the application should be filed with the Oil Conservation Division, 2040 S. Pacheco, Santa Fe, New Mexico 87505 within fifteen (15) days.

If you have any questions regarding this application, please contact me at (903) 561-2900.

Yours truly,

  
Kevin Mayes P.E.  
Project Engineer

KM:gt  
Attachments

## APPLICATION FOR AUTHORIZATION TO INJECT

- I. Purpose: ☒ Secondary Recovery ☐ Pressure Maintenance ☐ Disposal ☐ Storage  
Application qualifies for administrative approval? ☒ yes ☐ no
- II. Operator: Mewbourne Oil Company  
Address: P. O. Box 7698, Tyler, Texas 75711  
Contact party: Kevin Mayes Phone: (903) 561-2900
- III. Well data: Complete the data required on the reverse side of this form for each well proposed for injection. Additional sheets may be attached if necessary.
- IV. Is this an expansion of an existing project? ☒ yes ☐ no  
If yes, give the Division order number authorizing the project R-10151
- V. Attach a map that identifies all wells and leases within two miles of any proposed injection well with a one-half mile radius circle drawn around each proposed injection well. This circle identifies the well's area of review.
- \* VI. Attach a tabulation of data on all wells of public record within the area of review which penetrate the proposed injection zone. Such data shall include a description of each well's type, construction, date drilled, location, depth, record of completion, and a schematic of any plugged well illustrating all plugging detail.
- VII. Attach data on the proposed operation, including:
1. Proposed average and maximum daily rate and volume of fluids to be injected;
  2. Whether the system is open or closed;
  3. Proposed average and maximum injection pressure;
  4. Sources and an appropriate analysis of injection fluid and compatibility with the receiving formation if other than reinjected produced water; and
  5. If injection is for disposal purposes into a zone not productive of oil or gas at or within one mile of the proposed well, attach a chemical analysis of the disposal zone formation water (may be measured or inferred from existing literature, studies, nearby wells, etc.).
- \*VIII. Attach appropriate geological data on the injection zone including appropriate lithologic detail, geological name, thickness, and depth. Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlying the proposed injection zone as well as any such source known to be immediately underlying the injection interval.
- IX. Describe the proposed stimulation program, if any.
- \* X. Attach appropriate logging and test data on the well. (If well logs have been filed with the Division they need not be resubmitted.)
- \* XI. Attach a chemical analysis of fresh water from two or more fresh water wells (if available and producing) within one mile of any injection or disposal well showing location of wells and dates samples were taken.
- XII. Applicants for disposal wells must make an affirmative statement that they have examined available geologic and engineering data and find no evidence of open faults or any other hydrologic connection between the disposal zone and any underground source of drinking water.
- XIII. Applicants must complete the "Proof of Notice" section on the reverse side of this form.
- XIV. Certification
- I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.
- Name: Kevin Mayes Title: Project Engineer  
Signature: Kevin Mayes Date: January 24, 1996
- \* If the information required under Sections VI, VIII, X, and XI above has been previously submitted, it need not be duplicated and resubmitted. Please show the date and circumstance of the earlier submittal.




ITEM III OF NEW MEXICO OCD FORM C-108  
INJECTION WELL DATA SHEET

**Mewbourne Oil Co.** **Querecho Plains Queen Associated Sand Unit**  
OPERATOR LEASE  
2 2300' FNL & 2300' FWL 23 18S 23E  
WELL NO. FOOTAGE LOCATION SECTION TOWNSHIP RANGE

Schematic

Tabular Data

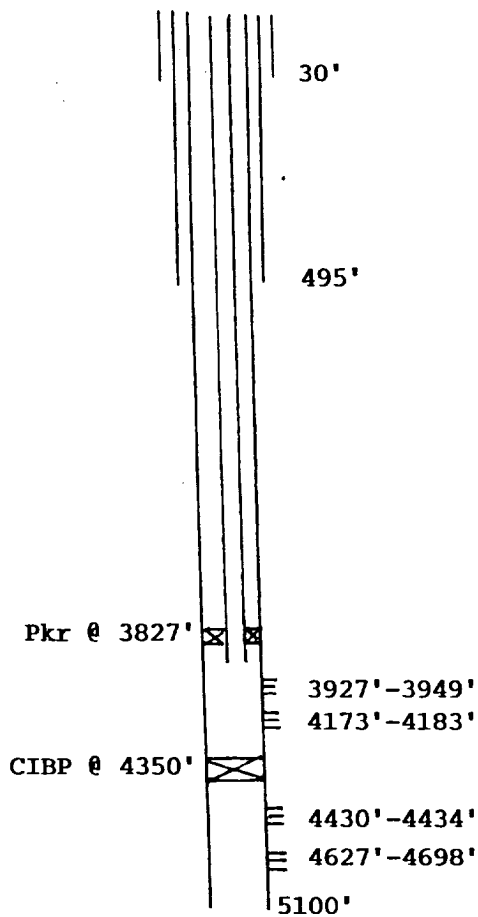

Surface Casing

Size 16 " Cemented with 3 yds xx.  
TOC Surface feet determined by Circulated  
Hole size NA

Intermediate Casing

Size 8 5/8" " Cemented with 250 sq.  
TOC Surface feet determined by Circulated  
Hole size 11"

Long string

Size 5 1/2 " Cemented with 375 sq.  
TOC 3315 feet determined by Temp. Log.  
Hole size 7 7/8"  
Total depth 5100'

Injection interval


3927 feet to 4183 feet  
(perforated or open-hole, indicate which)

TD = 5100'


Tubing size 2 3/8" lined with Bare Steel set in a  
(material)  
Otis Interlock packer at 3827 feet  
(brand and model)  
(or describe any other casing-tubing seal).

Other Data

- Name of the injection formation Queen/Penrose
- Name of field or pool (if applicable) Querecho Plains
- Is this a new well drilled for injection? ☐ Yes ☒ No  
If no, for what purpose was the well originally drilled? Production
- Has the well ever been perforated in any other zone(s)? List all such perforated intervals and give plugging detail (sacks of cement or bridge plug(s) used) See Schematic
- Give the depth to and name of any overlying and/or underlying oil or gas zones (pools) in this area.  
Overlying = Seven Rivers  
Underlying = Delaware

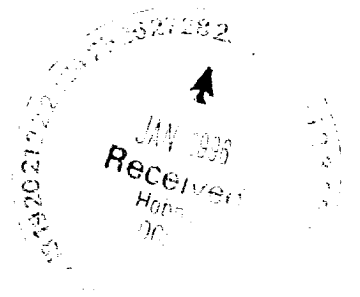

R32E

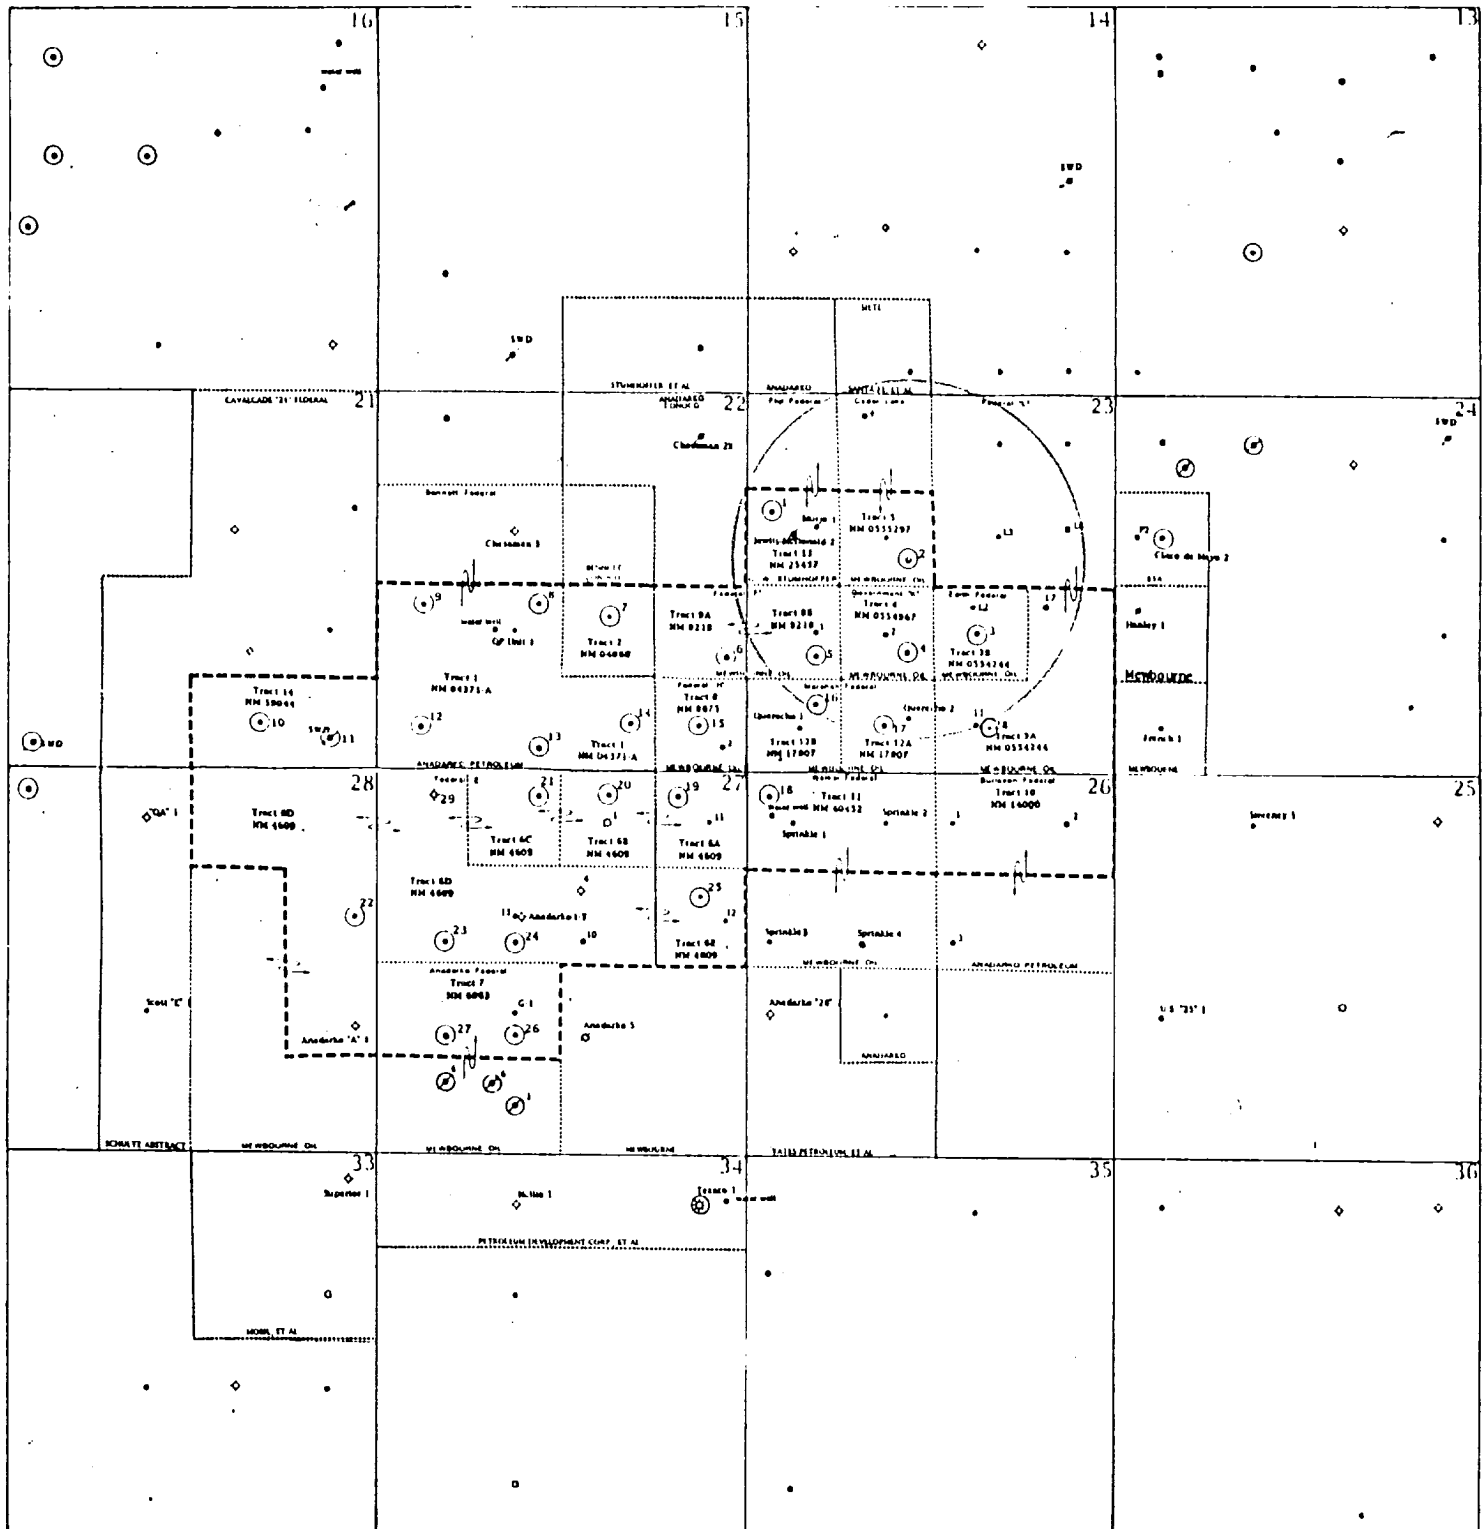

MOC

Mewbourne Oil Company  
Tyler, Texas

EXHIBIT "A"

○ Wells With Queen Production

QUEREOCHO PLAINS QUEEN

ASSOCIATED SAND UNIT

Unit Boundary and Tracts

Revised 11/28/94

Revised 4/21/94


Revised 9/15/91

Revised 7/16/91

Revised 11/15/91

KEVIN MAYN


11

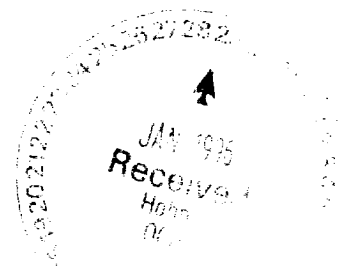




ITEM VI OF NEW MEXICO OCD FORM C-108  
WELLS WITHIN REVIEW AREA WHICH PENETRATE THE QUEEN  
QUERECHO PLAINS QUEEN ASSOCIATED SAND UNIT  
12-18-95/KMM

OPERATOR	LEASEWELL	LOCATION	TYPE	CONSTRUCTION	TOP OF CEMENT	DATE DRILLED	TD	COMPLETION & COMMENTS
MEWBOURNE OIL CO.	FED L #4	T18S, R32E, SEC 23 660 FNL, 1650 FEL	WIW	13 3/8 @ 438' CMT W/ 400 SX 8 5/8 @ 4318' CMT W/ 1600 SX 5 1/2 @ 8760' CMT W/ 1325 SX	SURFACE(V) SURFACE(V) 2155'	11/3/87	8760'	OPEN PERFS 8431'-8506' CONVERT TO INJECTION
MEWBOURNE OIL CO.	CEDAR LAKE FED #4	T18S, R32E, SEC 23 330 FNL, 1650 FWL	OIL	8 5/8 @ 450' CMT W/ 300 SX 5 1/2 @ 5003' CMT W/ 1175 SX	SURFACE(V) SURFACE(V)	10/9/91	5003'	OPEN PERFS 4834'-4856'
MEWBOURNE OIL CO.	FLIP FEDERAL #1	T18S, R32E, SEC 23 1650 FNL, 330 FWL	WIW	13 3/8 @ 35' CMT W/ 5 YDS 8 5/8 @ 1190' CMT W/ 500 SX 4 1/2 @ 4750' CMT W/ 550 SX	SURFACE(C) SURFACE(C) 2360'	6/30/80	4750'	PERF & TEST 4648'-4668' PB 4229' OPEN PERFS 4143'-4150' CONVERT TO INJECTION
MALJAMAR OIL & GAS	JEWITT-McDONALD #2	T18S, R32E, SEC 23 1980 FNL, 660 FWL	P & A	8 5/8 @ 1348' CMT W/ 50 7 @ 4616' CMT W/ 150	994' 2800'	2/21/44	4809'	O/H FROM TD TO 7" SHOE P & A
MEWBOURNE OIL CO.	MURJO FED #1	T18S, R32E, SEC 23 1850 FNL, 990 FWL	OIL	13 3/8 @ 350' CMT W/ 350 SX 8 5/8 @ 2777' CMT W/ 1200 SX 5 1/2 @ 10800' CMT W/ 650 SX	SURFACE(V) SURFACE(V) 1300'	6/25/87	11780'	PERF & TEST 10648'-10726' PERF & TEST 10172'-10223' PERF & TEST 9619'-9670' SQZ PERFS 9619'-9670' W/ 1150 PERF & TEST 9726'-9743' PERF & TEST 9192'-9210' CIBP @ 9560' OPEN PERFS 8283'-8426' RET. BP @ 8506' Sqz cmt behind 5 1/2", 1300'-4500'
MEWBOURNE OIL CO.	CEDAR LAKE FED #2	T18S, R32E, SEC 23 1980 FNL, 1980 FWL	OIL	13 3/8 @ 478' CMT W/ 500 SX 8 5/8 @ 4286' CMT W/ 1400 SX 5 1/2 @ 8708' CMT W/ 1075 SX	SURFACE(V) SURFACE(V) 3347'	11/10/86	8700'	OPEN PERFS 8435'-8501'
MEWBOURNE OIL CO.	FED L#3	T18S, R32E, SEC 23 1980 FNL, 1650 FEL	OIL	13 3/8 @ 450' CMT W/ 416 SX 8 5/8 @ 4315' CMT W/ 1700 SX 5 1/2 @ 8698' CMT W/ 1475 SX	SURFACE(V) SURFACE(V) 1342'	6/19/87	8698'	OPEN PERFS 8446'-8526'
MEWBOURNE OIL CO.	FED L#6	T18S, R32E, SEC 23 1880 FNL, 660 FEL	OIL	13 3/8 @ 448' CMT W/ 475 SX 8 5/8 @ 4330' CMT W/ 1575 SX 5 1/2 @ 8650' CMT W/ 1400 SX	SURFACE(V) SURFACE(V) SURFACE(V)	7/24/88	8650'	OPEN PERFS 8436'-8520'
MEWBOURNE OIL CO.	FED L#7	T18S, R32E, SEC 23 2310 FSL, 990 FEL	WIW	8 5/8 @ 356' CMT W/ 250 SX 5 1/2 @ 8670' CMT W/ 4630 SX	SURFACE(V) SURFACE(V)	5/14/88	8670'	DEEPEN FROM OTD @ 4281' (19 OPEN PERFS 8485'-8552' CONVERT TO INJECTION
MEWBOURNE OIL CO.	EDITH FEDERAL #2	T18S, R32E, SEC 23 1980 FSL, 1980 FEL	WIW	8 5/8 @ 380' CMT W/ 250 SX 4 1/2 @ 4270' CMT W/ 300 SX	SURFACE(V) 2966'	2/12/74	4270'	OPEN PERFS 3958'-4224' CONVERT TO INJECTION



MEWBOURNE OIL CO. FED L#2	T18S, R32E, SEC 23 2310 FSL, 2030 FEL	WIW	13 3/8 @ 441' CMT W/ 450 SX 8 5/8 @ 4293' CMT W/ 1800 SX 5 1/2 @ 8750' CMT W/ 925 SX	SURFACE(V) SURFACE(V) 4137'	10/14/86	8750'	OPEN PERFS 8458'-8531' CONVERT TO INJECTION
MEWBOURNE OIL CO. GOVERNMENT K #1	T18S, R32E, SEC 23 1700 FSL, 2300 FWL	OIL	8 5/8 @ 418' CMT W/ 300 SX 5 1/2 @ 4800' CMT W/ 750 SX	SURFACE 514'	9/29/74	4800'	OPEN PERFS 4178'-4190'
MEWBOURNE OIL CO. GOVERNMENT K #2	T18S, R32E, SEC 23 1950 FSL, 1980 FWL	WIW	13 3/8 @ 700' CMT W/ 700 SX 8 5/8 @ 4800' CMT W/ 3100 SX 5 1/2 @ 4408'-8900' CMT W/ 900 S 4408'	SURFACE(V) SURFACE(V) 4408'	9/19/86	8900'	OPEN PERFS 8343'-8515' CONVERT TO INJECTION
MEWBOURNE OIL CO. FED F#1	T18S, R32E, SEC 23 1650 FSL, 990 FWL	OIL	8 5/8 @ 1167' CMT W/ 600 SX 5 1/2 @ 4300' CMT W/ 665 SX	SURFACE(V) 500'	9/29/77	4300'	OPEN PERFS 4132'-4163'
MEWBOURNE OIL CO. FED F#3	T18S, R32E, SEC 23 1980 FSL, 990 FWL	WIW	13 3/8 @ 480' CMT W/ 275 SX 8 5/8 @ 4285' CMT W/ 1700 SX 5 1/2 @ 8570' CMT W/ 1375 SX	SURFACE(V) SURFACE(V) SURFACE(V)	12/31/86	8570'	OPEN PERFS 8362'-8448' CONVERT TO INJECTION
MEWBOURNE OIL CO. MARSHALL FED #2	T18S, R32E, SEC 23 990 FSL, 990 FWL	OIL	8 5/8 @ 367' CMT W/ 350 SX 4 1/2 @ 4293' CMT W/ 860 SX	SURFACE(V) SURFACE(V)	12/23/81	4293'	OPEN PERFS 3906'-4160'
MEWBOURNE OIL CO. QUERECHO FED #2	T18S, R32E, SEC 23 760 FSL, 2310 FWL	OIL	13 3/8 @ 374' CMT W/ 385 SX 8 5/8 @ 3010' CMT W/ 1300 SX 5 1/2 @ 8703' CMT W/ 1100 SX	SURFACE SURFACE 3217'	5/6/86	9100'	OPEN PERFS 8459'-8526'
MEWBOURNE OIL CO. MARSHALL FED #1	T18S, R32E, SEC 23 660 FSL, 1980 FWL	WIW	8 5/8 @ 514' CMT W/ 59 SX 4 1/2 @ 4250' CMT W/ 300 SX	SURFACE(V) 2934'	6/15/73	4250'	OPEN PERFS 4176'-4190' CONVERT TO INJECTION
MEWBOURNE OIL CO. FEDERAL L#1	T18S, R32E, SEC 23 660 FSL, 1980 FEL	OIL	13 3/8 @ 459' CMT W/ 400 SX 8 5/8 @ 4345' CMT W/ 1700 SX 5 1/2 @ 9050' CMT W/ 1050 SX	SURFACE(V) SURFACE(V) 3814'	4/22/86	9050'	OPEN PERFS 8474'-8538'

NOTE: TOP OF CEMENT IS CALCULATED WITHOUT COMPENSATION FOR COLLARS AND USES 75% EXCESS.  
 CALCULATIONS ASSUME SLURRY YIELDS OF 1.32 CUFT/SX FOR CASING SET SHALLOWER THAN 6000', AND  
 1.08 CUFT/SX FOR DEEPER CASING.  
 V= VISUAL  
 CBL= CEMENT BOND LOG.

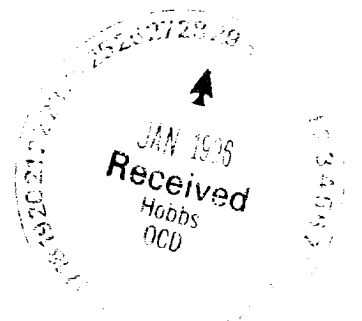


# ITEM VI OF NEW MEXICO OIL FORM C-108 PLUGGED WELL DETAIL

Maljamar Oil & Gas Jewett-McDonald

2	1980' FNL & 660' FWL	23	18S	32E
WELL NO.	FOOTAGE LOCATION	SECTION	TOWNSHIP	RANGE

## Schematic



5 5/8" CMT @ Surface  
CMT to 300'  
Stub @ 329'  
Bridge in top of  
8 5/8" csg.

CMT 1358'-1308'  
Shoe @ 1348'  
Bridge 1370'-1358'

Stub @ 2273'

CMT 4105'-4054'

CMT 4624'-4574'  
Shoe @ 4616'

## Tabular Data

### Surface Casing

Size N/A " Cemented with        %  
TNC        feet determined by         
Hole size       

### Intermediate Casing

Size 8-5/8 " Cemented with 50 %  
TNC 994 feet determined by calculation  
Hole size       

### Long string

Size 7 " Cemented with 150 %  
TNC 2800 feet determined by calculation  
Hole size       

Total depth 4809'

### Injection Interval

       feet to        feet  
(perforated or open-hole, indicate which)

Tubing size        lined with        (material) set in a  
(brand and model) packer at        feet  
(or describe any other casing-tubing seal).

## Other Data

- Name of the injection formation
- Name of field or pool (if applicable)
- Is this a new well drilled for injection? ☒ Yes ☐ No  
If no, for what purpose was the well originally drilled?
- Has the well ever been perforated in any other zone(s)? List all such perforated intervals and give plugging detail (cacks of cement or bridge plug(s) used)
- Give the depth to and name of any overlying and/or underlying oil or gas zones (pools) in this area.

ITEM VII OF NEW MEXICO OCD FORM C-108  
DATA ON PROPOSED OPERATIONS  
QPQASU NO. 2 (O.H. CEDAR LAKE NO 1)

- ITEM VII (1) The maximum injection rate should not exceed 200 bwpd.
- ITEM VII (2) The injection system will be operated as a closed system.
- ITEM VII (3) Based on the lower of two direct offsetting steprate tests the maximum injection pressure should not exceed 1390 psi.
- ITEM VII (4) The source of injection water for the subject well will be the Querecho Plains Bone Spring Sand Unit. The source of water for the Bone Spring Unit is fresh water supplied by the city of Carlsbad, Delaware produced water, Bone Spring produced water and Queen produced water. A copy of these water analyze is attached.
- ITEM VII (5) Not applicable.

ITEM VIII OF NEW MEXICO OCD FORM C-108  
GEOLOGIC DATA ON THE INJECTION ZONE & UNDERGROUND DRINKING WATER  
QPQASU NO. 2 (O.H. CEDAR LAKE NO. 1)

The zone being targeted for water injection is the Queen/Penrose sands at depths from 3927'-4183'. The Queen/Penrose sands are a sequence of well consolidated sandstone, siltstone, and shale strata of Permian Guadalupe age cemented with calcareous material. An eleven percent porosity cut off is used to determine net pay as porosity less than eleven percent is considered impermeable at the existing and proposed reservoir pressure and reservoir fluid regimes. Impermeable shale deposits exist above and below the targeted sands. All injected fluids should remain in the reservoir with the exception of cycling to the surface through wellbores.

Based on communications with the New Mexico State Engineer's Roswell office (Ken Fresquez) and OCD files at Hobbs there appears to be eleven fresh water wells within T18S & R32E. None of these wells are within the area of review. The deepest of these wells has a total depth of 700'. The source strata tapped by this well is the Triassic "Red Beds" and the only other strata Mr. Fresquez referred to as potentially fresh was the Alluvium which is shallower than the "Red Beds". There are no known fresh water strata underlying the Queen/Penrose.

ITEMS IX THROUGH XII  
QPQASU NO. 2 (O.H. CEDAR LAKE NO. 1)

- ITEM IX. The Queen and Penrose were both acidized and fracture stimulated at the time of completion.
- ITEM X. All logging and test data for the existing wellbores already exists on file with the state of New Mexico Oil Conservation Division (OCD) and will not be resubmitted with this application.
- ITEM XI. As stated in ITEM VIII, it appears the only strata within one mile of our proposed injector which contains water of possible drinking quality is confined to 700' and shallower. No contamination of this drinking water should occur as all existing wellbores which penetrate the Queen/Penrose in the proposed area are completed or plugged in a manner to prevent communication from our flood to these water strata.
- ITEM XII. After reviewing the geology of the Queen/Penrose strata in a one and one-half mile radius around the proposed injector, no evidence appears of fractures or any hydrologic connection between the target sands and any overlying or underlying strata.





CAPROCK LABORATORIES, INC.  
3312 BANKHEAD HIGHWAY  
MIDLAND, TEXAS 79701  
(915) 689 - 7252

May 21, 1992

Mewburne Oil Company  
P. O. Box 7698  
Tyler, Texas 75711

Attention: Kevin Mays

Subject: Water Compatibility Study


Gentlemen:

Presented in this report are the final results of a water compatibility study performed on 5 samples of produced water provided to this laboratory by Core Laboratory on behalf of Mewburne Oil Company. API Water Analysis was performed on each of the samples to determine their ionic characteristics. Based on these analyses, the scaling tendency with respect to calcium carbonate and calcium sulfate were calculated and reported on May 19, 1992 (our Job Number 9205032). The samples were physically mixed to determine if precipitates would form. Turbidity was measured as percent transmittance on each of the combinations at 420 nanometers wavelength on a Milton Roy Model 601 Spectrophotometer.

The turbidity data are presented in this report and indicated ~~that~~ that the water from the Federal "E" #5 tank battery (Queen Formation) and the water from the Cedardrake Federal #4 well formed precipitates when combined in the ratios tested (very slight decreases in transmittance were observed). Additional analyses were performed on the waters to determine their barium concentrations and are also presented in this report. Based on calculations from theoretical combinations, all of the waters have a tendency to form both calcium carbonate and calcium sulfate scale on their own and these tendencies do not increase when mixed. The fresh water from Double Eagle and the Delaware produced water from the Cedardrake Federal #4 well both have barium and therefore presents the possibility of barium sulfate scale formation when combined with waters high in sulfate.

In conclusion, based on all of the analyses and physical combinations of these waters, the Delaware produced water from the Jewitt Feed #1 appears to be the most compatible water to the Bone Springs water from the Federal "L" lease.

Respectfully yours,



James L. Pritchard, Lab Manager  
Caprock Laboratories, Inc.



CAPROCK LABORATORIES, INC.  
3312 BANKHEAD HIGHWAY  
MIDLAND, TEXAS 79701  
(915) 689 - 7252

COMPANY: MEWBURNE OIL COMPANY JOB NUMBER: 9205032

SAMPLE NUMBER	SAMPLE DESCRIPTION
1	FEDERAL "E" #5 T.B. (QUEEN FORMATION)
2	JEWITT FEED #1 (DELAWARE FORMATION)
3	DOUBLE EAGLE (FRESH WATER)
4	CEDARDRAKE FEDERAL #4 (DELAWARE FORMATION)
5	FEDERAL "L" LEASE (BONE SPRINGS FORMATION)

MIXTURE	TURBIDITY, % TRANS. @ 420 $\mu$ M
1-5	96.6
2-5	100.
3-5	100.
4-5	99.5
1-2-5	94.3
1-3-5	95.3
1-4-5	98.8
2-3-5	100.
2-4-5	98.8
3-4-5	99.7
ALL	97.7



**WATER ANALYSIS REPORT**

**SAMPLE**

Oil Co. :  
 Lease : **DOUBLE EAGLE**  
 Well No. : **FRESH WATER**  
 Job No. : 9205032

Sample Loc. :  
 Date Sampled :  
 Attention :  
 Analysis No. : 3

**ANALYSIS**

1. pH 9.100  
 2. Specific Gravity 60/60 F. 0.996  
 3. CaCO<sub>3</sub> Saturation Index @ 80 F. +1.548  
 @ 140 F. +2.388

**Dissolved Gasses**

4. Hydrogen Sulfide 0.0  
 5. Carbon Dioxide Not Determined  
 6. Dissolved Oxygen Not Determined


**Cations**

7. Calcium (Ca <sup>++</sup> )	200	/ 20.1 =	9.95
8. Magnesium (Mg <sup>++</sup> )	304	/ 12.2 =	24.92
9. Sodium (Na <sup>+</sup> ) (Calculated)	2,507	/ 23.0 =	109.00
10. Barium (Ba <sup>++</sup> )	6	/ 68.7 =	0.09

**Anions**

11. Hydroxyl (OH <sup>-</sup> )	0	/ 17.0 =	0.00
12. Carbonate (CO <sub>3</sub> <sup>-</sup> )	0	/ 30.0 =	0.00
13. Bicarbonate (HCO <sub>3</sub> <sup>-</sup> )	183	/ 61.1 =	3.00
14. Sulfate (SO <sub>4</sub> <sup>-</sup> )	50	/ 48.8 =	1.02
15. Chloride (Cl <sup>-</sup> )	4,963	/ 35.5 =	139.80
16. Total Dissolved Solids	8,213		
17. Total Iron (Fe)	1	/ 18.2 =	0.05
18. Total Hardness As CaCO <sub>3</sub>	1,752		
19. Resistivity @ 75 F. (Calculated)	0.685 /cm.		

**LOGARITHMIC WATER PATTERN**  
 \*meq/L.

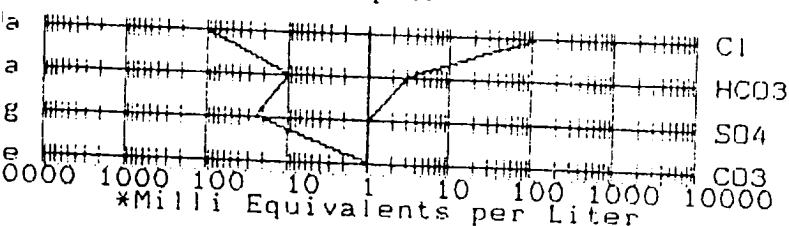


Calculated Calcium Sulfate solubility in this brine is 2,814 mg/L. at 90 F.

Analyst

Remarks and Comments:

**PROBABLE MINERAL COMPOSITION**

COMPOUND	EQ. WT.	X	*meq/L =	mg/L.
Ca(HCO <sub>3</sub> ) <sub>2</sub>	81.04	3.00		243
CaSO <sub>4</sub>	68.07	0.94		64
CaCl <sub>2</sub>	55.50	6.02		334
Mg(HCO <sub>3</sub> ) <sub>2</sub>	73.17	0.00		0
MgSO <sub>4</sub>	60.19	0.00		0
MgCl <sub>2</sub>	47.62	24.92		1,187
NaHCO <sub>3</sub>	84.00	0.00		0
NaSO <sub>4</sub>	71.03	0.00		0
NaCl	58.46	108.87		6,364

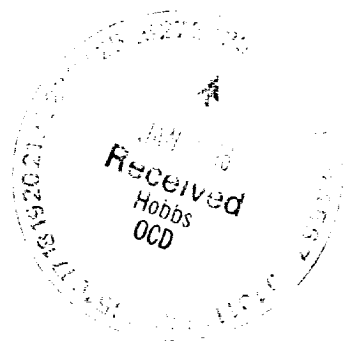



# LABORATORY S, INC.

3312 Bankhead Hwy.  
Midland, Texas 79701  
(915) 689-7252  
FAX # (915) 689-0130

## WATER ANALYSIS REPORT

### SAMPLE

Oil Co. : MEWBOURNE OIL CO.  
Lease : FEDERAL E  
Well No. : #5 T.B.  
Job No. : 9205032

Sample Loc. : QUEEN PENCOSE PROD. WATER  
Date Sampled :  
Attention :  
Analysis No. : 1

### ANALYSIS

- |   | MG/L     | EQ. WT. | *MEQ/L |
|---|----------|---------|--------|
| 1. pH   | 6.100    |         |        |
| 2. Specific Gravity 60/60 F.                  | 1.171    |         |        |
| 3. CaCO <sub>3</sub> Saturation Index @ 80 F. | +1.948   |         |        |
|   | @ 140 F. | +2.648  |        |

#### Dissolved Gasses

- |                     |                |
|---------------------|----------------|
| 4. Hydrogen Sulfide | 0.0            |
| 5. Carbon Dioxide   | Not Determined |
| 6. Dissolved Oxygen | Not Determined |

#### Cations


- |   |        |          |          |
|---|--------|----------|----------|
| 7. Calcium (Ca <sup>++</sup> )            | 8,978  | / 20.1 = | 446.67   |
| 8. Magnesium (Mg <sup>++</sup> )          | 8,266  | / 12.2 = | 677.54   |
| 9. Sodium (Na <sup>+</sup> ) (Calculated) | 94,120 | / 23.0 = | 4,092.17 |
| 10. Barium (Ba <sup>++</sup> )            | 0.0    |          |          |

#### Anions

- |  |            |          |          |
|--|------------|----------|----------|
| 11. Hydroxyl (OH <sup>-</sup> )                  | 0          | / 17.0 = | 0.00     |
| 12. Carbonate (CO <sub>3</sub> <sup>-</sup> )    | 0          | / 30.0 = | 0.00     |
| 13. Bicarbonate (HCO <sub>3</sub> <sup>-</sup> ) | 85         | / 61.1 = | 1.39     |
| 14. Sulfate (SO <sub>4</sub> <sup>-</sup> )      | 1,950      | / 48.8 = | 39.96    |
| 15. Chloride (Cl <sup>-</sup> )                  | 183,647    | / 35.5 = | 5,173.15 |
| 16. Total Dissolved Solids                       | 297,046    |          |          |
| 17. Total Iron (Fe)                              | 22         | / 18.2 = | 1.21     |
| 18. Total Hardness As CaCO <sub>3</sub>          | 56,450     |          |          |
| 19. Resistivity @ 75 F. (Calculated)             | 0.001 /cm. |          |          |

#### LOGARITHMIC WATER PATTERN

\*meq/L.

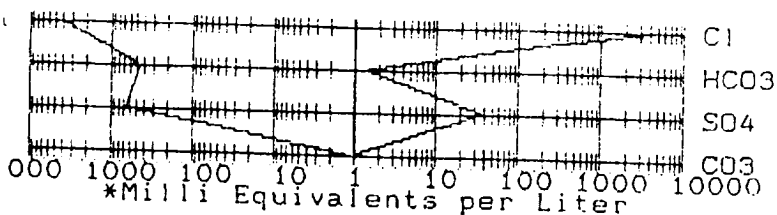


Calculated Calcium Sulfate solubility in this brine is 1,232 mg/L. at 90 F.


Analyst

Remarks and Comments:

PROBABLE MINERAL COMPOSITION			
COMPOUND	EQ. WT.	X	*meq/L = mg/L.
Ca(HCO <sub>3</sub> ) <sub>2</sub>	81.04	1.39	113
CaSO <sub>4</sub>	68.07	39.96	2,720
CaCl <sub>2</sub>	55.50	405.32	22,495
Mg(HCO <sub>3</sub> ) <sub>2</sub>	73.17	0.00	0
MgSO <sub>4</sub>	60.19	0.00	0
MgCl <sub>2</sub>	47.62	677.54	32,265
NaHCO <sub>3</sub>	84.00	0.00	0
NaSO <sub>4</sub>	71.03	0.00	0
NaCl	58.46	4,090.30	239,119







# CAPROCK LABORATORIES, INC.

3312 Bankhead Hwy.  
Midland, Texas 79701  
(915) 689-7252  
FAX # (915) 689-0130

## WATER ANALYSIS REPORT

### SAMPLE

Oil Co. : MEWBOURNE OIL CO.  
Lease : FEDERAL L LEASE  
Well No. :  
Job No. : 9205032

Sample Loc. : BONE SPRINGS PROD. WATER  
Date Sampled :  
Attention :  
Analysis No. : 5

### ANALYSIS

1. pH 7.550 ✓  
2. Specific Gravity 60/60 F. 1.110 ✓  
3. CaCO<sub>3</sub> Saturation Index @ 80 F. +0.842  
@ 140 F. +1.722

MG/L EQ. WT. \*MEQ/L

#### Dissolved Gasses

4. Hydrogen Sulfide 0.0  
5. Carbon Dioxide Not Determined  
6. Dissolved Oxygen Not Determined

#### Cations


7. Calcium (Ca<sup>++</sup>) 3,527 ✓ / 20.1 = 175.47  
8. Magnesium (Mg<sup>++</sup>) 1,556 / 12.2 = 127.54  
9. Sodium (Na<sup>+</sup>) (Calculated) 52,547 / 23.0 = 2,284.65  
10. Barium (Ba<sup>++</sup>) Not Determined

#### Anions

11. Hydroxyl (OH<sup>-</sup>) 0 / 17.0 = 0.00  
12. Carbonate (CO<sub>3</sub><sup>-</sup>) 0 / 30.0 = 0.00  
13. Bicarbonate (HCO<sub>3</sub><sup>-</sup>) 159 / 61.1 = 2.60  
14. Sulfate (SO<sub>4</sub><sup>-</sup>) 1,300 / 48.8 = 26.64  
15. Chloride (Cl<sup>-</sup>) 90,760 ✓ / 35.5 = 2,556.62  
16. Total Dissolved Solids 149,849  
17. Total Iron (Fe) 28 / 18.2 = 1.51  
18. Total Hardness As CaCO<sub>3</sub> 15,214  
19. Resistivity @ 75 F. (Calculated) 0.037 /cm.

#### LOGARITHMIC WATER PATTERN

\*meq/L.

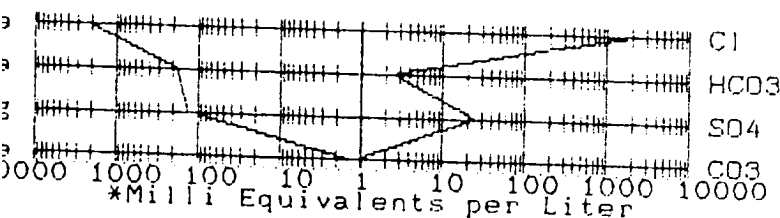


Calculated Calcium Sulfate solubility in this brine is 4,032 mg/L. at 90 F.


#### PROBABLE MINERAL COMPOSITION

COMPOUND	EQ. WT.	X	*meq/L	= mg/L.
Ca(HCO <sub>3</sub> ) <sub>2</sub>	81.04		2.60	211
CaSO <sub>4</sub>	68.07		26.64	1,813
CaCl <sub>2</sub>	55.50		146.23	8,116
Mg(HCO <sub>3</sub> ) <sub>2</sub>	73.17		0.00	0
MgSO <sub>4</sub>	60.19		0.00	0
MgCl <sub>2</sub>	47.62		127.54	6,074
NaHCO <sub>3</sub>	84.00		0.00	0
NaSO <sub>4</sub>	71.03		0.00	0
NaCl	58.46		2,282.85	133,455

Analyst

Remarks and Comments:

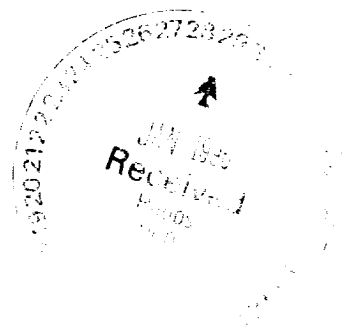



# CAPROCK LABORATORIES, INC.

3312 Bankhead Hwy.  
Midland, Texas 79701  
(915) 689-7252  
FAX # (915) 689-0130

## WATER ANALYSIS REPORT

### SAMPLE

Oil Co.: MEWBOURNE OIL CO.  
Lease: CEDARDAKE FEDERAL  
Well No.: #4  
Job No.: 9205032

Sample Loc.: DELAWARE PROD. WATER  
Date Sampled :  
Attention :  
Analysis No.: 4

### ANALYSIS

- |   | MG/L     | EQ. WT. | *MEQ/L |
|---|----------|---------|--------|
| 1. pH   | 6.900    |         |        |
| 2. Specific Gravity 60/60 F.                  | 1.148    |         |        |
| 3. CaCO <sub>3</sub> Saturation Index @ 80 F. | +0.668   |         |        |
|   | @ 140 F. | +1.778  |        |

#### Dissolved Gasses

- |                     |                |
|---------------------|----------------|
| 4. Hydrogen Sulfide | 0.0            |
| 5. Carbon Dioxide   | Not Determined |
| 6. Dissolved Oxygen | Not Determined |

#### Cations


- |   |        |          |          |
|---|--------|----------|----------|
| 7. Calcium (Ca <sup>++</sup> )            | 14,749 | / 20.1 = | 733.78   |
| 8. Magnesium (Mg <sup>++</sup> )          | 2,674  | / 12.2 = | 219.18   |
| 9. Sodium (Na <sup>+</sup> ) (Calculated) | 49,932 | / 23.0 = | 2,170.96 |
| 10. Barium (Ba <sup>++</sup> )            | 22     | / 68.7 = | 0.32     |

#### Anions

- |  |            |          |          |
|--|------------|----------|----------|
| 11. Hydroxyl (OH <sup>-</sup> )                  | 0          | / 17.0 = | 0.00     |
| 12. Carbonate (CO <sub>3</sub> <sup>-</sup> )    | 0          | / 30.0 = | 0.00     |
| 13. Bicarbonate (HCO <sub>3</sub> <sup>-</sup> ) | 49         | / 61.1 = | 0.80     |
| 14. Sulfate (SO <sub>4</sub> <sup>-</sup> )      | 1,300      | / 48.8 = | 26.64    |
| 15. Chloride (Cl <sup>-</sup> )                  | 109,904    | / 35.5 = | 3,095.89 |
| 16. Total Dissolved Solids                       | 178,630    |          |          |
| 17. Total Iron (Fe)                              | 18         | / 18.2 = | 0.99     |
| 18. Total Hardness As CaCO <sub>3</sub>          | 47,843     |          |          |
| 19. Resistivity @ 75 F. (Calculated)             | 0.014 /cm. |          |          |

#### LOGARITHMIC WATER PATTERN

\*meq/L.

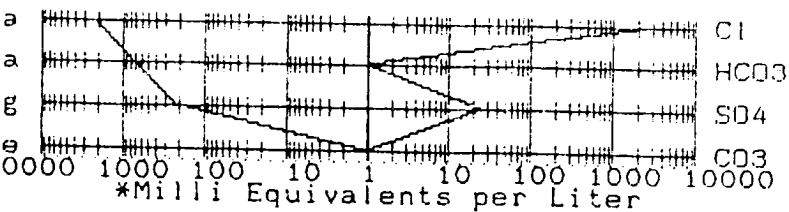

\*Milli Equivalents per Liter


Calculated Calcium Sulfate solubility in this brine is 1,111 mg/L. at 90 F.


#### PROBABLE MINERAL COMPOSITION

COMPOUND	EQ. WT.	X	*meq/L	= mg/L.
Ca(HCO <sub>3</sub> ) <sub>2</sub>	81.04	0.80	65	
CaSO <sub>4</sub>	68.07	26.32	1,792	
CaCl <sub>2</sub>	55.50	706.66	39,220	
Mg(HCO <sub>3</sub> ) <sub>2</sub>	73.17	0.00	0	
MgSO <sub>4</sub>	60.19	0.00	0	
MgCl <sub>2</sub>	47.62	219.18	10,437	
NaHCO <sub>3</sub>	84.00	0.00	0	
NaSO <sub>4</sub>	71.03	0.00	0	
NaCl	58.46	2,170.05	126,861	

Analyst

Remarks and Comments:

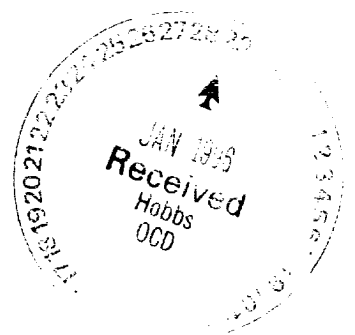



# CAPROCK LABORATORIES, INC.

3312 Bankhead Hwy.  
Midland, Texas 79701  
(915) 689-7252  
FAX # (915) 689-0130

## WATER ANALYSIS REPORT

### SAMPLE

Oil Co. : MANZANO OIL  
Lease : JEWITT FEED  
Well No. : #1  
Job No. : 9205032

Sample Loc. : DELAWARE PROD.  
Date Sampled :  
Attention :  
Analysis No. : 2

### ANALYSIS

- |   | MG/L     | EQ. WT. | *MEQ/L |
|---|----------|---------|--------|
| 1. pH   | 6.550    |         |        |
| 2. Specific Gravity 60/60 F.                  | 1.165    |         |        |
| 3. CaCO <sub>3</sub> Saturation Index @ 80 F. | +1.052   |         |        |
|   | @ 140 F. | +2.812  |        |

#### Dissolved Gasses

- |                     |                |
|---------------------|----------------|
| 4. Hydrogen Sulfide | 0.0            |
| 5. Carbon Dioxide   | Not Determined |
| 6. Dissolved Oxygen | Not Determined |


#### Cations

- |   |        |          |          |
|---|--------|----------|----------|
| 7. Calcium (Ca <sup>++</sup> )            | 24,529 | / 20.1 = | 1,220.35 |
| 8. Magnesium (Mg <sup>++</sup> )          | 2,772  | / 12.2 = | 227.21   |
| 9. Sodium (Na <sup>+</sup> ) (Calculated) | 52,982 | / 23.0 = | 2,303.57 |
| 10. Barium (Ba <sup>++</sup> )            | 0.0    |          |          |

#### Anions

- |  |            |          |          |
|--|------------|----------|----------|
| 11. Hydroxyl (OH <sup>-</sup> )                  | 0          | / 17.0 = | 0.00     |
| 12. Carbonate (CO <sub>3</sub> <sup>-</sup> )    | 0          | / 30.0 = | 0.00     |
| 13. Bicarbonate (HCO <sub>3</sub> <sup>-</sup> ) | 61         | / 61.1 = | 1.00     |
| 14. Sulfate (SO <sub>4</sub> <sup>-</sup> )      | 750        | / 48.8 = | 15.37    |
| 15. Chloride (Cl <sup>-</sup> )                  | 132,594    | / 35.5 = | 3,735.04 |
| 16. Total Dissolved Solids                       | 213,688    |          |          |
| 17. Total Iron (Fe)                              | 15         | / 18.2 = | 0.84     |
| 18. Total Hardness As CaCO <sub>3</sub>          | 72,665     |          |          |
| 19. Resistivity @ 75 F. (Calculated)             | 0.001 /cm. |          |          |

#### LOGARITHMIC WATER PATTERN

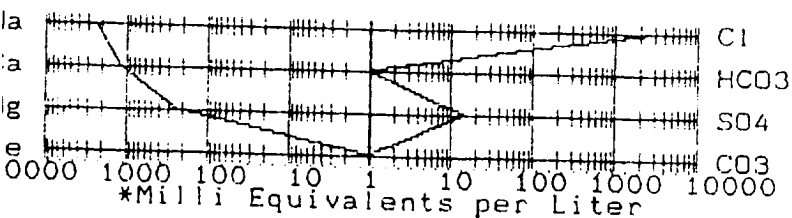

Calculated Calcium Sulfate solubility in this brine is 590 mg/L. at 90 F.

#### PROBABLE MINERAL COMPOSITION

COMPOUND	EQ. WT.	X	*meq/L	= mg/L.
Ca(HCO <sub>3</sub> ) <sub>2</sub>	81.04	1.00	81	
CaSO <sub>4</sub>	68.07	15.37	1,046	
CaCl <sub>2</sub>	55.50	1,203.98	66,821	
Mg(HCO <sub>3</sub> ) <sub>2</sub>	73.17	0.00	0	
MgSO <sub>4</sub>	60.19	0.00	0	
MgCl <sub>2</sub>	47.62	227.21	10,820	
NaHCO <sub>3</sub>	84.00	0.00	0	
NaSO <sub>4</sub>	71.03	0.00	0	
NaCl	58.46	2,303.85	134,683	

Analyst

Remarks and Comments:

