

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ well gas ☐ well other ☐

2. NAME OF OPERATOR
Amoco Production Company

3. ADDRESS OF OPERATOR
P.O. Drawer A, Levelland, Texas 79336

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 2310'FSL X 1980'FEL, Sec 13,
AT TOP PROD. INTERVAL: (Unit J, NW $\frac{1}{4}$, SE $\frac{1}{4}$)
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☒
(other)

SUBSEQUENT REPORT OF:

☐
☐
☐
☐
☐
☐
☐
☐
☐

5. LEASE

NM-01235-D

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Bondurant Federal

9. WELL NO.

4

10. FIELD OR WILDCAT NAME
West Tonto Yates 7 Rivers

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

13-19-32

12. COUNTY OR PARISH
Lea

13. STATE
NM

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
3628.5GR

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Evaluated well and determined well was not commercially productive.

Propose to plug and abandon as follows:

Spot 35 sacks Class H cmt bottom plug 3250'-3350'. TD at 3350'.

Spot 75 sacks Class H cmt plug 3060'-3210' across top of Seven Rivers.

Top of Seven Rivers at 3180'. Spot 100 sacks Class H cmt plug 2700'-2850'

across base of salt. Base of salt at 2775'. Spot 80 sacks Class H cmt plug

1230'-1360' across anhydrite. Top of anhydrite at 1243'. Spot 50 sacks

Class H cmt plug 295'-395' across 8-5/8" casing shoe. 8-5/8" casing set

at 345'. Spot 10 sacks surface. Erect Abandonment marker. Clean and level location.


Subsurface Safety Valve: Manu. and Type

18. I hereby certify that the foregoing is true and correct

SIGNED

Dennis Evans

TITLE Assist. Adm. Analyst

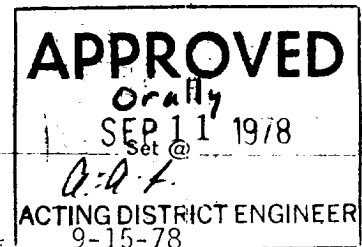

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

0+4 - USGS - H
1 - Div
1 - Susp
1 - DE

1 - L. P. Thompson
P. O. Box 460
Hobbs, New Mexico 88240
*See Instructions on Reverse Side

1 - F. R. Conley
Production Research
P. O. Box 1267
Ponca City, OK 74601