

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)


1. oil well ☐ gas well ☒ other ☐
2. NAME OF OPERATOR
Amoco Production Company
3. ADDRESS OF OPERATOR
P. O. Box 68, Hobbs, New Mexico 88240
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1980' FNL x 1980' FWL, Unit F
AT TOP PROD. INTERVAL: Sec. 5, T-19-S, R-33-E
AT TOTAL DEPTH:
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

- TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☒
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

SUBSEQUENT REPORT OF:

- ☐
☐
☐
☐
☐
☐
☐
☐
☐
☐

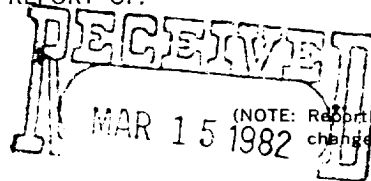

OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

5. LEASE
NM-077002
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME
Nellis "B" Federal Gas Com
9. WELL NO.
1
10. FIELD OR WILDCAT NAME
Buffalo Penn
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
5-19-33
12. COUNTY OR PARISH
Lea
13. STATE
NM
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
3726' RDB

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Propose to open Morrow intervals 13,511'-15', 17'-24', 34'-50', and 54'-62' as follows:

Kill well with 2% KCL water. Pull tubing and downhole assembly. Run tubing and retrieving head. Circ. sand off retrievable bridge plug. Pull tubing and bridge plug. Fish Vann Guns from well. Run 2-7/8" 6.5#, N-80 tubing with downhole assembly. Run gamma and collar locator log. Land 3-3/8" Vann gun assembly to perf Morrow intervals 13,511'-15', 17'-24', 34'-50', and 54'-62' with 4 SFP. Set Guiberson Uni VI packer and open Vann packer actuated vent assembly. Drop bar to fire guns and flow test Morrow interval 13,511'-62' natural. Run blanking plug and set in 1.875" profile in on-off tool. Open sliding sleeve above Morrow interval 13,310'-33'. Swab back load and flow test Morrow interval 13,310'-33'. Retrieve blanking plug in on-off tool by wireline. Flow test Morrow intervals 13,310'-33' and (over) 0+4-USGS, R 1-Hou 1-Susp 1-CLF

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Cathy L. Forman TITLE Ast. Adm. Analyst DATE 3-12-82

APPROVED

(This space for Federal or State office use)

(Orig. Sgd.) PETER W. CHESTER

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL IF ANY _____

MAR 23 1982

FOR
JAMES A. GILLHAM
DISTRICT SUPERVISOR

See Instructions on Reverse Side