STATE OF NEW MEXIC	30-025-28333 Form C-101 Revised 10-1-78						
P. O. BOX 2088 DISTRIBUTION SANTA FE FILE						SA. Ind cate Type of Loase BTATE FEE X	
U.S.G.S. LAND OFFICE OPERATOR		· .	•			.s. State Oil	& Gas Loaco No.
1a. Type of Work	ON FOR PERMIT TO		, OR PLUG BA			7. Unit Agre	ement Name
DRILL X DEEPEN PLUG BACK OIL X GAS WELL OTHER SINGLE X MULTIPLE ONE OF OPERALOR Name of Operator					8. Farm or Lease Name South Hobbs (GSA)Unit		
Amoco Productio	n Company						d Pool, or Wildcat
P. O. Box 68, Hobbs, New Mexico 88240						Hobbs GSA	
SL/BHL AND 900/1310 FEET FROM	11	34	TWP. 18-S		B-E NURM		
						12. County Lea	
			19. Proposed Dep	oth 19	A. Formation		20. Retury or C.T.
		6 Status Plug. Bond				Andres Rotary 22. Approx. Date Work will sta	
23.		ROPOSED CASING A	D CEMENT PROC	GRAM		<u> </u>	
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOC	T SETTING D	DEPTH	SACKS OF	CEMENT	EST. TOP
11" or 12-1/4"	8-5/8"	24#	1600'	, , , , ,			Surface
7-7/8"	5-1/2"	15.5#	4500'			ılate	Surface
							•
			·		•		
Propose to dril wil be run and commercial prod	l and equip well evaluated. Perf uction.	in the San Ar orate and/or	ndres format stimulate as	ion. neces	After resary in	eaching T attempti	D, logs ng
BOP Diagram atta NMOCD Order No.		Mud	l Program:			Fresh wa native m	nuds.
			1	.600'-	4300'	properti	th minimum es for safe ditions.
1-Texaco 1-Su	-HOU R.E. Ogden, n l-Petro Lewis	1-Shell		HOU R	m. 4.206	5 1-CMH	· ·
TIVE ZONE. GIVE BLOWOUT PREVENTE	R PROGRAM, IF ANT.		•	DAYA OR P	ALSENT PRO	DUCTIVE ZONE	AND PROPOSED NEW PRO
Signed halls m	Letter	Tule Administ			<i>b</i>	ate 8-3	0-83
	GNED BY JERRY SEXT	ON TITLE			D	ATE_AU	G 3 1 1983
CONDITIONS OF APPROVAL, IF	ANYI	· FERAN	AL VALID FOR TEXPIRES 38 DRILLING U	7//12	4		

AUG 30 1983

WELL)CATION AND ACREAGE DEDICATION AT

Form C-102 Supersedes C-128 Effective 1-1-65

All distances must be from the outer boundaries of the Section

		All distances must be f	rom the outer boundaries of	the Section.						
			South Hobbs Grayburg San Andres Unit 129							
T'mit l'etter M	Section 34	Township 18 South	Ronge 38 East	County Lea						
Actual Feotage Loc		south	900	west						
Ground Level Elev.	feet from the Producing Form	(Ine cand	Pool	t fmm the	line					
3618.9'	San An		Hobbs GSA		Dedicated Acteage: 40 Actea					
1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below.										
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).										
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?										
Yes No If answer is "yes," type of consolidation										
If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.)										
No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission.										
NOTE · A	In atea around	1 the	1		CERTIFICATION					
	M-\$coped.	Life	1							
	ines were fou	ind.	1	F I	rein is true and complete to the					
	1		i	E 1	y knowledge and belief.					
	!									
	_ +			Name	12.1/.					
	1		Ì	Position	les M. Xurring					
	l 1		i 1	Admin	istrative Analyst					
	i		1	Amoco	Production Company					
	1		† 1	Date 8-	30-83					
	1	135	in a Land	[hernby	certify that the well location					
	l I		TATE DA VE	1 1	this plat was platted from field					
i	į			1 1	actual surveys made by me or supervision, and that the same					
	1	2	676		nd correct to the best of my					
L	 		2	i i	and belief.					
			W MET IS							
	\		SOHN W.	Date Survey	ed y 9, 1983					
}	\		l L	Registered F	rofessional Engineer					
	100, {		[}	and for Land	Surveyor .					
900'				Certificate N	10 JOHN W WEST. 676					
2 330 660 19	0 1320 1650 1980	2310 2040 2000	1000	, and the second of	PONALD LEIDERN 1339					


'DARD 2000 PSI W.P. BOP STACK

- Blow-out preventers may be manually operated.
- All equipment must be in good condition, 2,000 psi W.P. (4,000 psi test) minimum.
- Bell nipple above blow-out preventer shall be same size as casing being drilled through.
- 4. Kelly cock to be installed on kelly.
- Full opening safety valve 2,000 psi w.p. (4,000 psi test) minimum must be available on rig floor at all times with proper connection or subs to fit any tool joint in string.
- Spool or cross may be eliminated if connections are available in the lower part of the blow-out preventer body.
- 7. Double or space saver type preventers may be used in lieu of two single preventers.
- 8. BOP rams to be installed as follows:*

Top preventer - Drill pipe or casing rams Bottom preventer - Blind rams

*Amoco District Superintendent may reverse location of rams.

- 9. Extensions and hand wheels to be installed and braced at all times.
- 10. Manifold valves may be gate or plug metal to metal seal 2" minimum.

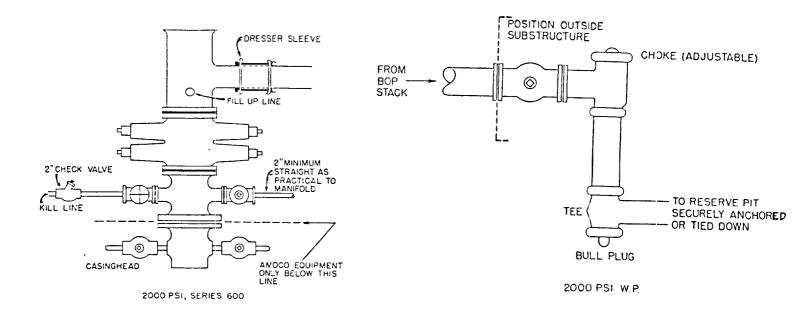

AUG 30 1983 HORES OFFICE