

30-025-28730

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

NEW MEXICO OIL CONSERVATION COMMISSION

Form C-101
Revised 1-4-65

5A. Indicate Type of Lease
STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
5. State Oil & Gas Lease No.
LG 4226

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. Type of Work		7. Unit Agreement Name	
b. Type of Well DRILL <input checked="" type="checkbox"/> DEEPEN <input type="checkbox"/> PLUG BACK <input type="checkbox"/> OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/> SINGLE ZONE <input checked="" type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>		8. Farm or Lease Name	
2. Name of Operator		9. Well No.	
Gulf Oil Corp.		1	
3. Address of Operator		10. Field and Pool, or Wildcat	
P. O. Box 670, Hobbs, NM 88240		UNDES. BONE SPRINGS	
4. Location of Well		12. County	
UNIT LETTER L LOCATED 1980 FEET FROM THE SOUTH LINE		LEA	
AND 660 FEET FROM THE WEST LINE OF SEC. 7 TWP. 18 S RGE. 34 E NMPM			
19. Proposed Depth		19A. Formation	20. Rotary or C.T.
9100		BONE SPRINGS	ROTARY
21. Elevations (Show whether Dr. RT, etc.)	21A. Kind & Status Plug. Bond	21B. Drilling Contractor	22. Approx. Date Work will start
4090.7 GLE		UNKNOWN	5/15/84

23.

PROPOSED CASING AND CEMENT PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	SACKS OF CEMENT	EST. TOP
17 1/2"	13 3/8"	48	500	500	SURFACE
11	8 5/8"	24/28	4500	1200	SURFACE
7 7/8"	5 1/2"	15.5/17.0	9100	500	7000

MUD PROGRAM : 0-500' FW SPUD MUD 8.6-8.8 PPG 32-36 VIS 8-9 PH
 500-4500' BRINE WATER 10.0-10.1 PPG 29-30 VIS 9-10 PH
 4500-9100 FW 8.4-8.5 PPG 29-32 VIS 8.5-9.5 PH

BOP'S 3000 PSI WORKING PRESSURE NIPPLE UP ON 13 3/8" AND 8 5/8"
 CASING. SEE ATTACHED DRAWING

APPROVAL VALID FOR 180 DAYS
 PERMIT EXPIRES 11/10/84
 UNLESS DRILLING UNDERWAY

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: IF PROPOSAL IS TO DEEPEN OR PLUG BACK, GIVE DATA ON PRESENT PRODUCTIVE ZONE AND PROPOSED NEW PRODUCTIVE ZONE. GIVE BLOWOUT PREVENTER PROGRAM, IF ANY.



I hereby certify that the information above is true and complete to the best of my knowledge and belief.

Signed L.C. Anderson Title AREA PROD MGR Date 5-8-84
 (This space for State Use)

ORIGINAL SIGNED BY JERRY SEXTON

MAY 10 1984

APPROVED BY DISTRICT SUPERVISOR TITLE _____ DATE _____
 CONDITIONS OF APPROVAL, IF ANY:

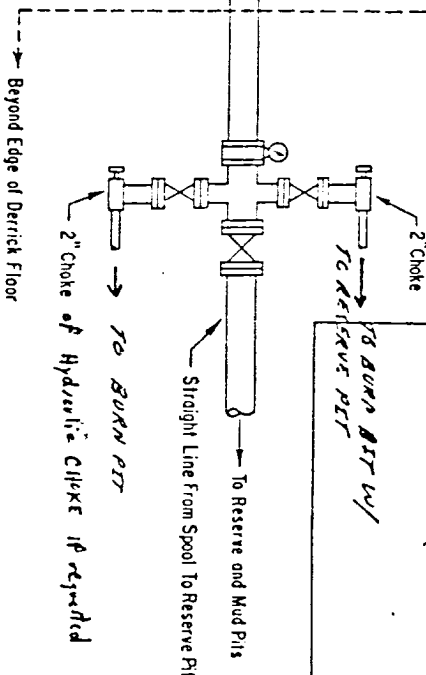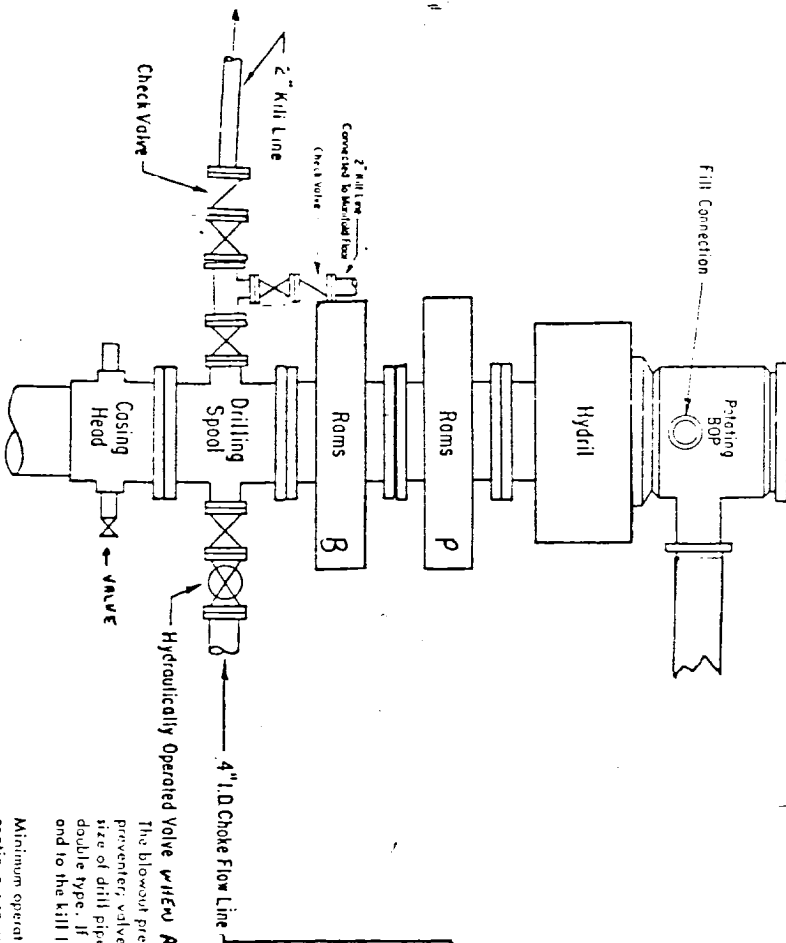

ADDITIONS - DELETIONS - CHANGES SPECIFY

NOTE: "Welder Reported" means
at any time the GULF Supervisor
can, may, or will require the
equipment to be installed during
operations.

2000-3000 PSI WORKING PRESSURE BOP HOOK - UP

SPECIFY WORKING PRESSURE

The closing manifold and remote closing manifold shall have a separate control for each pressure-operated device. Controls are to be labeled, with control handles to indicate open and closed positions. A pressure reducer and regulator must be provided for operating the Hydril preventer. When requested, a second pressure reducer shall be available to limit operating fluid pressures to ram preventers. Gulf Legion Hto. 38 hydraulic oil, or equivalent or better, is to be used as the fluid to operate the hydraulic equipment.

The choke manifold, the choke flow line, the choke lines and the relief lines are to be supported by metal stands and adequately anchored. The choke flow line, relief lines and choke lines shall be constructed as straight as possible and without sharp bends. Easy and safe access shall be maintained to the choke manifold. All valves are to be selected for operation in the presence of oil, gas, and drilling fluids. The choke flow line valves and valves of the relief lines connected to the drilling spool and all ram type preventers must be equipped with stem extensions, universal joints, if needed, and hand wheels which are to extend beyond the edge of the derrick substructure. All other valves shall be equipped with handles.

Minimum operating equipment for the preventers and hydraulically operated valves shall be as follows: (1) multiple pumps, driven by a continuous source of power, capable of fluid charging the total accumulator volume from the nitrogen precharge pressure to its rated pressure within 2 minutes. Also, the pumps are to be connected to the hydraulic operating system which is to be a closed system. (2) the charging pumps shut down, the pressurized fluid volume stored in the accumulators shall be sufficient to close all the pressure-operated devices simultaneously within 49 seconds, after closure, the remaining accumulator pressure shall be not less than 1000 PSI with the remaining accumulator fluid volume at least 50 percent of the original. When requested, either an additional source of power, remote and equivalent, is to be available to operate the above pumps, or there shall be additional pumps operated by separate power and equal in performance capabilities.

The blowout preventer assembly shall consist of one blind ram preventer and one pipe ram preventer, both hydraulically operated, a Hydril preventer, valves, chokes and connections, as illustrated. If a tapered drill string is used, a ram preventer shall be provided for each size of drill pipe. Closing and tubing rams to fit the preventer are to be available as needed. The ram preventer may be two singles or a double type. If correct in size, the flanged outlets of the ram preventer may be used for connecting to the 4-inch I.D. choke flow line and to the kill line. The substructure height shall be sufficient to install a rotating blowout preventer.

NEW MEXICO OIL CONSERVATION COMMISSION
WELL LOCATION AND ACREAGE DEDICATION PLAT

Form C-102
Supersedes C-128
Effective 1-1-65

All distances must be from the outer boundaries of the Section


Operator GULF OIL CORPORATION			Lease 100-100			Well No.		
Unit Letter 1	Section 7	Township 15 SOUTH		Range 34 EAST	County EL PASO			
Actual Footage Location of Well: 1980 feet from the SOUTH line and 1980 feet from the WEST line								
Ground Level Elev. 4090.7	Producing Formation BONE SPRINGS		Pool UNDES. BONE SPRINGS		Dedicated Acreage: 40 Acres			

1. Outline the acreage dedicated to the subject well by colored pencil or hatchure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?

☐ Yes ☐ No If answer is "yes," type of consolidation _____

If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.) _____

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission.

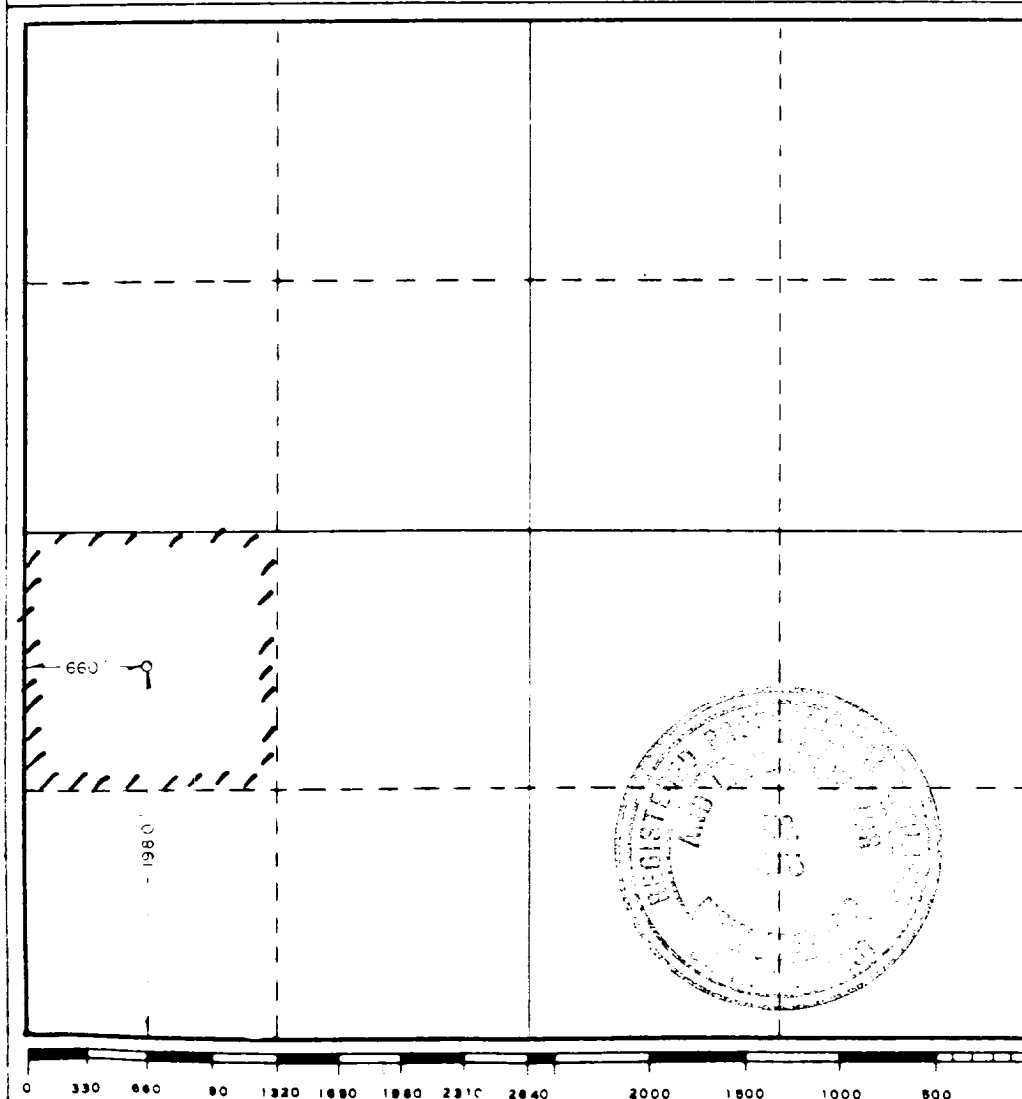

CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

R.C. Anderson

Name
R.C. ANDERSON

Position
AREA PROD MGR

Company
GULF OIL CORP

Date
5-8-84

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed
MAY 11, 1984

Registered Professional Engineer
and/or Land Surveyor

John W. West

Certificate No. JOHN W. WEST, 676
RONALD J. EIDSON, 3239

MAY 11 1964
C
HOLLYWOOD

173