


INJECTION WELL DATA SHEET

| OPERATOR | | LEASE | | |
|--|----------------------|----------|----------|-------|
| Cities Service Oil and Gas Corporation | | State DW | | |
| WELL NO. | FOOTAGE LOCATION | SECTION | TOWNSHIP | RANGE |
| 4 | 1880' FNL, 1980' FWL | 12 | 18S | 33E |

Schematic

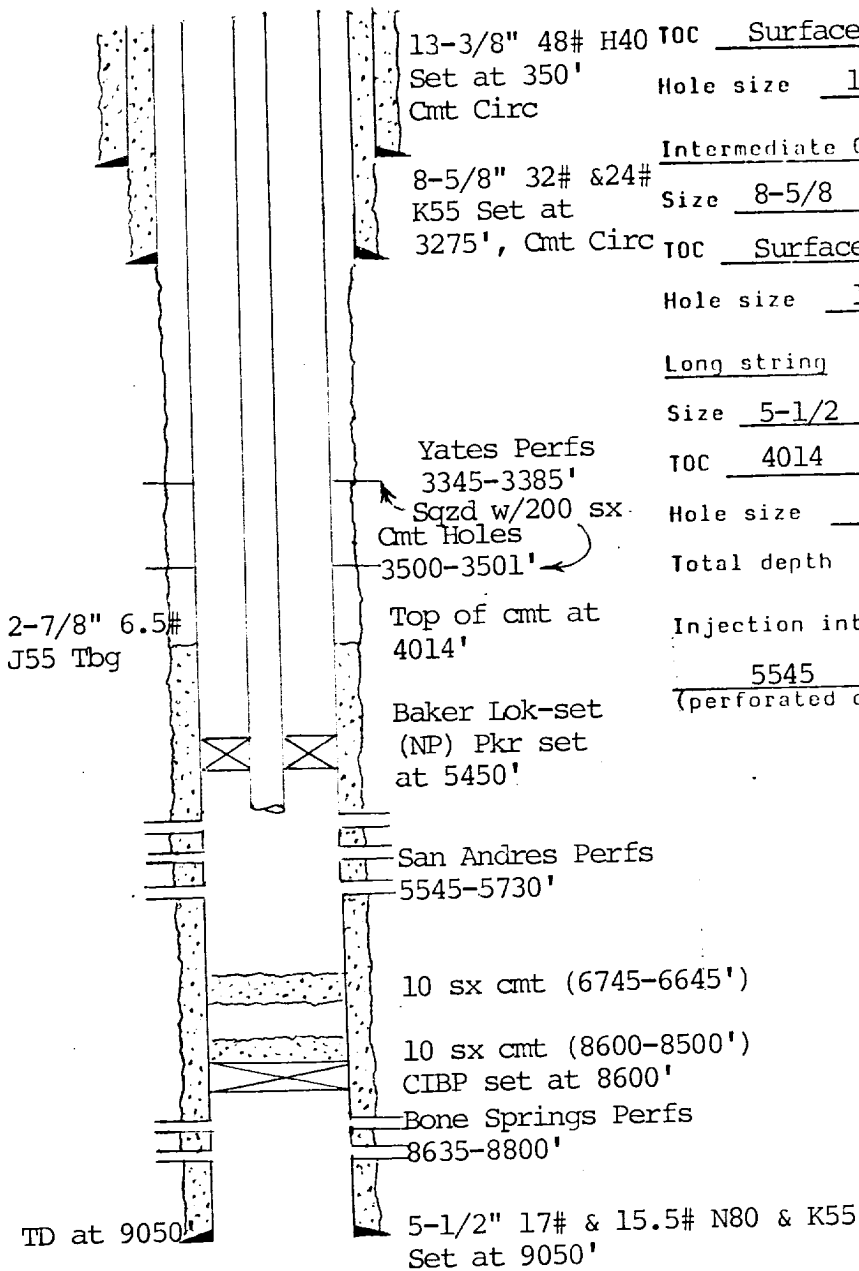

Tabular Data

Surface Casing

Size 13-3/8 " Cemented with 500 sx.
 TOC Surface feet determined by -
 Hole size 17-1/2" Setting Depth 350'

Intermediate Casing

Size 8-5/8 " Cemented with 1500 sx.
 TOC Surface feet determined by -
 Hole size 11" Setting Depth 3275'

Long string

Size 5-1/2 " Cemented with 1925 sx.
 TOC 4014 feet determined by Bond Log
 Hole size 7-7/8" Setting Depth 9050'
 Total depth 9050'

Injection interval

5545 feet to 5730 feet
 (perforated or ~~packed~~ indicate which)

Tubing size 2-7/8" lined with plastic (material) set in a
Baker lok-set (nickel plated) packer at 5450 feet
 (brand and model)
 (or describe any other casing-tubing seal).

Other Data

- Name of the injection formation San Andres
- Name of Field or Pool (if applicable) Mescalero Escarpe
- Is this a new well drilled for injection? ☐ Yes ☒ No
 If no, for what purpose was the well originally drilled? Bone Springs oil well
- Has the well ever been perforated in any other zone(s)? List all such perforated intervals and give plugging detail (sacks of cement or bridge plug(s) used) Bone Springs: 8635-8800'; CIBP at 8600', 10 sx: 8600-8500'; 10 sx: 6745-6645'; Yates: 3345-3385', squeezed with 200 sx
- Give the depth to and name of any overlying and/or underlying oil or gas zones (pools) in this area. Premier: 5114'; Bone Springs: 6680'