Submit 3 Copies to Appropriate District Office

State of New Mexico Energy, Minerals and Natural Resources Department

Form C-103 Revised 1-1-89

DISTRICT I P.O. Box 1980, Hobbs, NM 88240

OIL CONSERVATION DIVISION

| 2 COM | CKVALIC | נע אונ | A1210 |
|----------|--------------|--------|-------|
| | P.O. Box 208 | 88 | |
| Santa Fe | New Marian | 97504 | 2000 |

| 30-025-29259 | | |
|-----------------------------------|-----|--|
| 5. Indicate Type of Losse STATE X | FEE | |

| DISTRICT II | Santa Fe, New Mexico 87504-2088 | 30-025-29259 | |
|--|--|--|--|
| DISTRICT III | | 5. Indicate Type of Losse STATE X FEE | |
| 1000 Rio Brazos Rd., Aztec, NM 87410 | 6. State Oil & Gas Lease No. | | |
| SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.) 1. Type of Well: | | 7. Lease Name or Unit Agreement Name BRIDGES STATE | |
| OR WELL X OAS WELL 2. Name of Operator | OTHER | | |
| Mobil Producing Tx. & N.M. Inc | c.* ation & Producing U.S. Inc., as Agent for | 8. Well No. 501 | |
| Mobil Producing TX. & N.M. Inc 4. Well Location | ., P. O. Box 633, Midland, TX 79702 | 9. Pool name or Wildcat VACUUM GRAYBURG SAN ANDRES | |
| | Feet From The SOUTH Line and | 1275 Feet From The EAST Line | |
| 38408 14 | Township 17-S Range 34-E 10. Elevation (Show whether DF, RKB, RT, GR, etc.) KB 4063 | NMPM LEA County | |
| NOTICE OF INTEN | ropriate Box to Indicate Nature of Notice, I | Report, or Other Data BSEQUENT REPORT OF: | |
| PERFORM REMEDIAL WORK | PLUG AND ABANDON X REMEDIAL WORK | ALTERING CASING | |
| PULL OR ALTER CASING | CASING TEST AND C | - 1200 KIND KONTOONMENT | |
| OTHER: | OTHER: | | |

- 1. MIRU PU. DIG PIT. FLOW WELL BACK TO PIT. ND WH. NU BOP.
- 2. RIH W/WS TO 4400. LOAD HOLE W/10 PPG GELLED BRINE.
- 3. PUH TO 2950. SPOT 20 SX CL C PLUG ACROSS YATES TOP @ 2870 FROM 2950-2800.
- 4. PUH TO 1830. SPOT 30 SX CL C PLUG ACROSS CSG SHOE @ 1705 & SALT TOP FROM 1830-1630.
- 5. PUH TO 30. SPOT 10 SX CL C PLUG FROM 30 TO SURFACE. POOH W/WS.
- 6. ND BOP. RD PU. DIG OUT CELLAR AND CUT CSG 3 BELOW SURFACE. WELD STEEL PLATE ON CSG STUB. ERECT P & A MARKER WITH WELL NAME AND PLUGGED DATE. FILL CELLAR AND CLEAN SURFACE LOCATION.

| | | (1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - | |
|---|--------------------------|--|--|
| | | | |
| I hereby certify that the information above is true and complete to the best of | my knowledge and belief. | | |
| SKINATURE THEY HOLLOCK | REGULATORY TECHNICIAN | DATE 08-19-93 | |
| TYPE OR PRINT NAME KAYE POLLOCK | | (915) TELEPHONE NO. 688-2584 | |
| (This space for State Use) ORIGINAL SIGNED BY JERRY 5 | SEXTON | | |
| DISTRICT I SUPERVISOR | TITLE | DATE AUG 2 3 1993 | |
| CONDITIONS OF APPROVAL SPIANTY | | - DAIS - ING D D DOO | |


BRIDGES STATE # 501 VACUUM GRAYBURG (SAN ANDRES) FIELD LEA COUNTY, NEW MEXICO

RECOMMENDED WORKOVER PROCEDURE

- 1. MIRU PU. DIG PIT. FLOW WELL BACK TO PIT. ND WH. NU BOP.
- 2. RIH W/ WS TO 4400'. LOAD HOLE W/ 10 PPG GELLED BRINE.
- PUH TO 2950'. SPOT 20 SX CLASS C NEAT CMT PLUG ACROSS YATES TOP @ 2870' FROM 2950-2800'.
- 4. PUH TO 1830'. SPOT 30 SX CLASS C NEAT CMT PLUG ACROSS CSG SHOE @ 1705' & SALT TOP FROM 1830-1630'.
- 5. PUH TO 30'. SPOT 10 SX CLASS C NEAT CMT PLUG FROM 30'-SURFACE. POOH W/ WS.
- 6. ND BOP. RD PU. DIG OUT CELLAR AND CUT CSG 3' BELOW SURFACE. WELD STEEL PLATE ON CSG STUB. ERECT P&A MARKER WITH WELL NAME AND PLUGGED DATE. FILL CELLAR AND CLEAN SURFACE LOCATION.

BRIDGES STATE WELL # 501 VACUUM GRAYBURG (SAN ANDRES) FIELD LEA COUNTY, NEW MEXICO

CURRENT COMPLETION

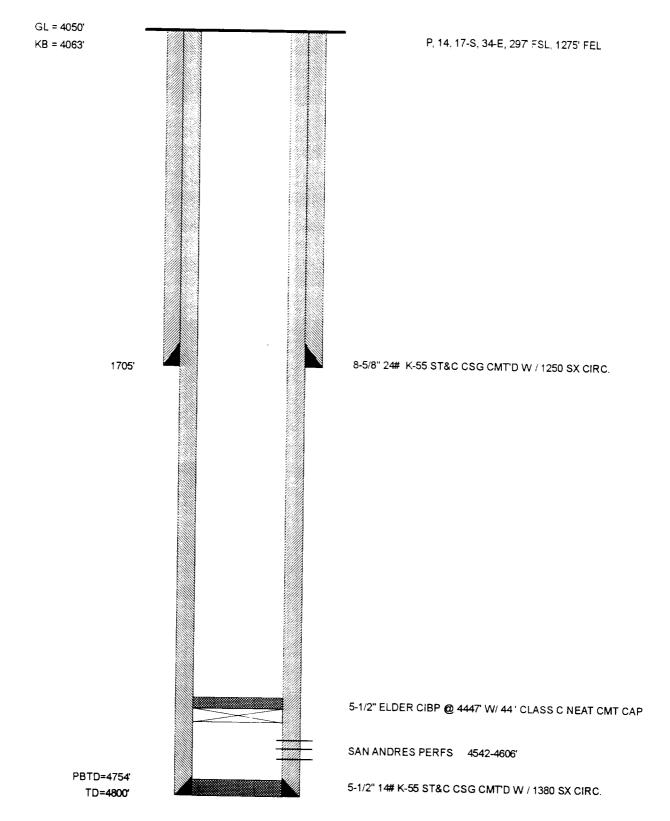

BRIDGES STATE

WELL # 501

VACUUM GRAYBURG (SAN ANDRES) FIELD LEA COUNTY, NEW MEXICO

PROPOSED COMPLETION P, 14, 17-S, 34-E, 297 FSL, 1275 FEL GL = 4050' 10 SX CLASS C NEAT CMT PLUG GL = 4063' FROM 30'-SURFACE 8-5/8" 24# K-55 ST&C CSG @ 1705" 30 SX CLASS C NEAT CMT PLUG ACROSS CSG SHOE @ CMT'D W / 1250 SX CIRC. 1705' & SALT TOP FROM 1830-1630' 20 SX CLASS C NEAT CMT PLUG ACROSS YATES TOP ${\bf @}$ 2870' FROM 2950-2800' 5-1/2" ELDER CIBP @ 4447' W/ 44' CLASS C NEAT CMT CAP SAN ANDRES PERFS 4542-4606'

> PBTD=4754' TD=4800'

5-1/2" 14# K-55 ST&C CSG CMT'D W / 1380 SX CIRC.