
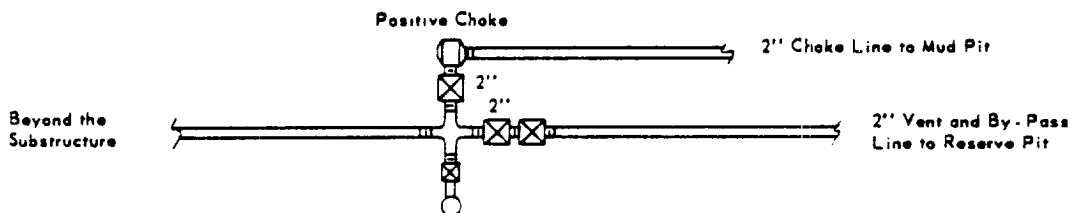


MINIMUM BLOWOUT PREVENTER EQUIPMENT FOR LOW PRESSURE SERVICE

Class IV (2000 psi WP - Series 600)

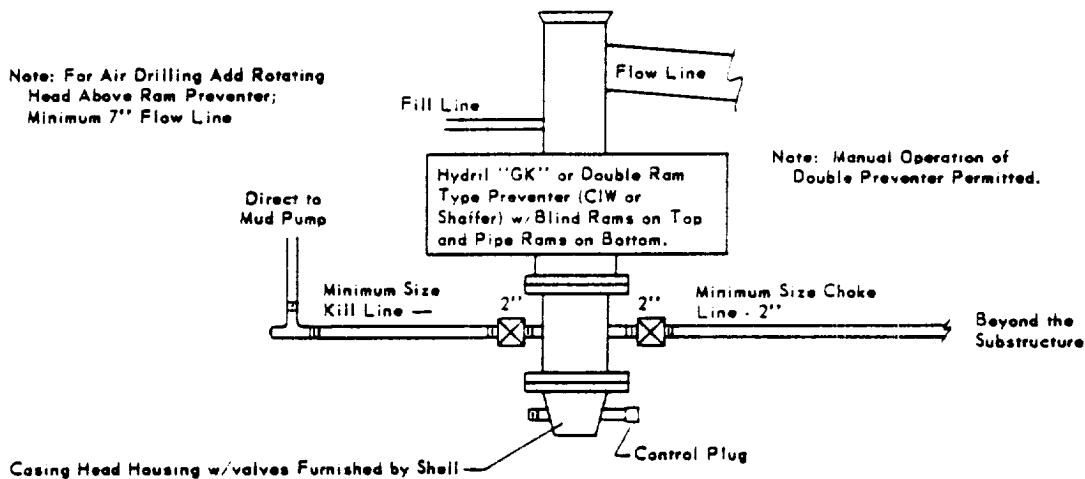


MINIMUM REQUIREMENTS

1. All BOP's, valves, fittings and lines shall have 2000 psi WP (Series 600) ratings.
2. All equipment from the preventer to the outermost valve or choke shall be pressure tested to 2000 psi.
3. The Cameron steel ring shall be required on all BOP Flange connections.
4. Replacement parts for the positive choke shall be available at rig.
5. All lines shall be securely anchored.
6. Casing wear ring shall be required when the BOP is larger than the nominal casing size.
7. Inside BOP shall be provided.
8. BOP's shall have extension handles.
9. A closing unit shall be required if pressure operated BOP's are used.

EXHIBIT "D"

Blowout Preventer
Cavalcade Oil Corporation
Conoco Federal No.1
Section 8, T18S, R33E
Norton Drilling Rig No. 11

78-01-6 2000



RECEIVED

OCT 31 1985

1000000000