


CONDITION II-B 3000 WP
FOR AIR DRILLING OR
WHERE YATES AIR BLOWS ARE EXPECTED

H₂S TRIM REQUIRED
YES _____ NO _____

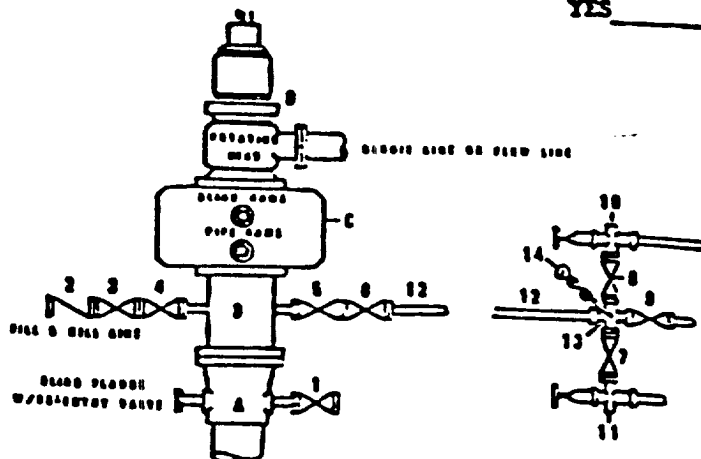

INSTALLATION CONTROL

MATERIAL LIST - CONDITION II - B
SEE ALSO SPECIFICATIONS

- A Texaco Wellhead
- B 3000# W.P. drilling spool with a 2" minimum flanged outlet for kill-line and 3" minimum flanged outlet for choke line
- C 3000# W.P. dual ram type preventer, hydraulic operated with 1" steel, 3000# W.P. control lines (where sub-structure height is adequate, 2-3000# W.P. single ram type preventers may be utilized.)
- D Rotating Head and extended Electric Line.
- 1,3,6, 7,8 2" minimum 3000# W.P. flanged full opening steel gate valve, or Halliburton Le Torr Plug valve.
- 2 2" minimum 3000# W.P. back pressure valve
- 5,6,9 3" minimum 3000# W.P. flanged full opening steel gate valve, or Halliburton Le Torr Plug valve.
- 12 3" minimum schedule 80, Grade "B", seamless line pipe
- 13 2" minimum x 3" minimum 3000# W.P. flanged cross
- 10, 11 2" minimum 3000# W.P. adjustable choke bodies
- 14 Cameron Hod Gauge or equivalent (location optional in choke line.)

DATE		DATE	REV. NO.	REV. NO.	TEXACO, INC. PRODUCT DEVELOPMENT & RESEARCH HOUSTON, TEXAS
DESIGNED BY					
CHECKED BY					
APPROVED BY					

EXHIBIT C

NOV 5 1986
FBI
FBI

NOV 12 1986

NOV 12 1986
FBI
FBI