Ekay 28 State #2
Dios Mano Bone Spring
API #30-025-31353
P-Sec 28-T18S-R34E, Lea County
660' FSL & 660' FEL
Prop ID#228900-002
4013' GL
Harvey E. Yates Company

prepared by J. Atkinson

DRAWING NOT TO SCALE.

Wellbore Status as of : 12/16/02

Proposed Plugging Procedure:

Spud:	10/1/91
TD: 11,500'	3/21/92
PBTD: 11,166'	4/2/92 (original)
PBTD: 9,160'	1/11/94 (current)
Completed:	4/29/92

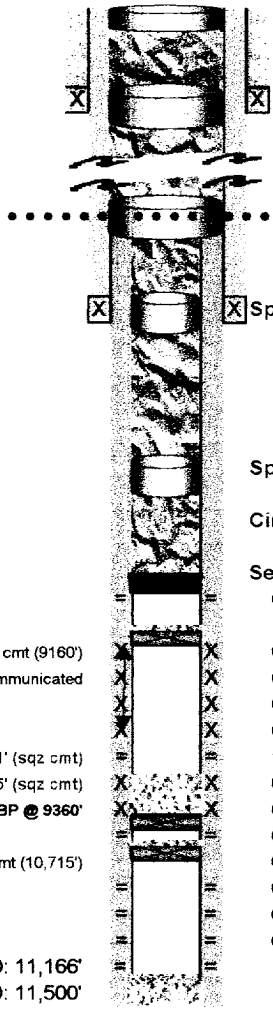

Set 20 sx surf plug & install DRY HOLE Marker

Spot 100' plug 1950'-1850'.

Cut & pull appx 2070' 5 1/2" csg
Spot plug # 2120'-2020'. Tag.

Spot 100' plug @ 3525'-3425',

Spot 100' plug @ 6100' - 6000'.

Circulate 9# mud.

Set CIBP @ 9030' + 30' Cement.

01/11/94 13. Perf 9066-74, 9106-9012 (9 holes) & acdz, frac

09/12/92 11. Perf 9187-9188' & acdz -- SQZD 12/29/93
06/16/92 9. Hydrojet 4 cuts @ 9194' -- SQZD 6/23/92
06/26/92 10. Perf 9205 w/4 spf & acdz -- SQZD 12/29/93
04/29/92 8. Perf 9190-9205 w/2 spf & acdz -- SQZD 6/1/93
12/31/93 12. Perf 9214 w/4 spf & acdz
04/23/92 7. Perf 9262-82 w/2 spf & acdz -- SQZD 4/29/92
04/18/92 6. Perf 9310-48 w/2 spf & acdz -- SQZD 4/22/92
04/14/92 5. Perf 9374-80 w/2 spf & acdz
04/12/92 4. Perf 10784-95 w/2 spf & acdz
04/10/92 3. Perf 10819-34 w/2 spf & acdz
04/07/92 2. Perf 10853-55, 59-61, 66-68 & acdz
04/05/92 1. Perf 11042-66, 11080-90 & acdz

1/11/94 set CIBP @ 9170 w/10' cmt (9160')
Perfs 9187-88, 9205 & 9214 communicated

PBTD @ 9251' (sqz cmt)
PBTD @ 9295' (sqz cmt)
Set CIBP @ 9360'

4/15/92 Set CIBP @ 10,750 w/35' cmt (10,715')

by CBL, PBTD: 11,166'
TD: 11,500'

Surface Casing:
1900' - 13 3/8" 54.5# J-55 ST&C
Cmtd w/475 , TOC=Circulated

Intermediate Casing:
3478' - 8 5/8" 32# J-55 Csg
cmtd w/1625 sx cmt, TOC=Circulated

Production Casing:
11502' - 5 1/2" 17# J-55,N-80,S-95 csg
cmtd w/2210 sx cmt (3 stgs), TOC=2070' by cbl
DV Tool @ 10306' & 8508'
Marker Jt: 3968-3991'

PROPOSED PLUGGING PROCEDURES:

1 Set CIBP @ 9030' + 30' Cement.
2 Circulate 9# mud.
3 Spot 100' plug @ 6100' - 6000'.
4 Spot 100' plug @ 3525'-3425',
5 Cut & pull appx 2070' 5 1/2" csg
6 Spot plug # 2120'-2020'. Tag.
7 Spot 100' plug 1950'-1850'.
8 Set 20 sx surf plug & install DRY HOLE Marker.