

Submit to Appropriate
District Office
State Lease - 6 copies
Fee Lease - 5 copies

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-101
Revised 1-1-89

OIL CONSERVATION DIVISION
P.O. Box 2088
Santa Fe, New Mexico 87504-2088

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240
DISTRICT II
P.O. Drawer DD, Artesia, NM 88210
DISTRICT III
000 Rio Brazos Rd., Aztec, NM 87410

API NO. (assigned by OCD on New Wells)
30-025-31990

5. Indicate Type of Lease
STATE ☒ FEE ☐

6. State Oil & Gas Lease No.
B-1306

7. Lease Name or Unit Agreement Name
NEW MEXICO 'R' STATE NCT-1

8. Well No.
13

9. Pool name or Wildcat
VACUUM DRINKARD

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

a. Type of Work:
DRILL ☒ RE-ENTER ☐ DEEPEN ☐ PLUG BACK ☐

b. Type of Well:
OIL WELL ☒ GAS WELL ☐ OTHER ☐
SINGLE ZONE ☒ MULTIPLE ZONE ☐

Name of Operator
TEXACO EXPLORATION AND PRODUCTION INC.

Address of Operator
P. O. Box 3109, Midland, Texas 79702

Well Location
Unit Letter G : 1905 Feet From The NORTH Line and 2130 Feet From The EAST Line

Section 6 Township 18-SOUTH Range 35-EAST NMPM LEA County

10. Proposed Depth
8150'

11. Formation
DRINKARD

12. Rotary or C.T.
ROTARY

13. Elevations (Show whether DF, RT, GR, etc.)
GR-3977'

14. Kind & Status Plug. Bond
BLANKET

15. Drilling Contractor

16. Approx. Date Work will start
JUNE 20, 1993

PROPOSED CASING AND CEMENT PROGRAM					
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	SACKS OF CEMENT	EST. TOP
14 3/4	11 3/4	42#	1500	860	SURFACE
11	8 5/8	32#	2950'	1100	SURFACE
7 7/8	5 1/2	15.5# & 17#	8150'	1385	SURFACE

CEMENTING PROGRAM:
SURFACE CASING - 660 SX CLASS C w/ 4% GEL & 2% Cacl2 (13.5ppg, 1.74cf/s, 9.1gw/s). F/B 200 SX CLASS C w/ Cacl2 (14.8ppg, 1.32cf/s, 6.3gw/s).
INTERMEDIATE CASING - 1st STG: 550 SX 35/65 POZ CLASS H w/ 6% GEL, 5% SALT, 1/4# FLOCELE (12.8ppg, 1.1cf/s, 10.4gw/s). F/B 150 SX CLASS H w/ 2% Cacl2 (15.6ppg, 1.19cf/s, 5.2gw/s).
TOOL @ 1500' - 400 SX CLASS H w/ 2% Cacl2 (15.6ppg, 1.19cf/s, 5.2gw/s).
PRODUCTION CASING - 1st STG: 320 SX 35/65 POZ CLASS H w/ 6% GEL, 5% SALT, 1/4# FLOCELE (12.8ppg, 1.94cf/s, 10.4gw/s). F/B 225 SACKS CLASS H (15.6ppg, 1.18cf/s, 5.2gw/s).
TOOL @ 5000' - 2nd STG: 740 SX 35/65 POZ CLASS H w/ 6% GEL, 5% SALT & 1/4# FLOCELE (12.8ppg, 1.94cf/10.4gw/s). F/B 100 SX CLASS H (15.6ppg, 1.18cf/s, 5.2gw/s).

HERE ARE NO OTHER OPERATORS IN THIS QUARTER QUARTER SECTION.

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: IF PROPOSAL IS TO DEEPEN OR PLUG BACK, GIVE DATA ON PRESENT PRODUCTIVE ZONE AND PROPOSED NEW PRODUCTIVE ZONE. GIVE BLOWOUT PREVENTER PROGRAM, IF ANY.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE C. P. Basham /cmh TITLE DRILLING OPERATIONS MANAGER DATE 05-27-93

TYPE OR PRINT NAME C. P. BASHAM TELEPHONE NO. (915) 688-4626

(This space for State Use)

ORIGINAL SIGNED BY TERY SEXTON DATE JUN - 1 1993
DISTRICT III TITLE _____

APPROVED BY _____ TITLE _____ DATE _____

CONDITIONS OF APPROVAL, IF ANY:

Permit Expires 6 Months From Approval
Date Unless Drilling Underway.

Submit to Appropriate
Field Office
Lease - 4 copies
Lease - 3 copies

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-102
Revised 1-1-89

OIL CONSERVATION DIVISION

P.O. Box 2088
Santa Fe, New Mexico 87504-2088

STRICTLY
Box 1980, Hobbs, NM 88240

STRICTLY
Drawer DD, Artesia, NM 88210

STRICTLY
Box 1000, Aztec, NM 87410

WELL LOCATION AND ACREAGE DEDICATION PLAT

All Distances must be from the outer boundaries of the section

Operator TEXACO EXPLORATION AND PRODUCTION Inc.			Lease NEW MEXICO "R" STATE NCT_1		Well No. 13
Section G	Section 6	Township 18-South	Range 35-East	County Lea	
Actual Footage Location of Well: 1905 feet from the North line and 2130 feet from the East line Ground level Elev. 3977 Producing Formation Packbook DRINKARD Pool Vacuum Packbook DRINKARD Dedicated Acreage: 40 Acres					

1. Outline the acreage dedicated to the subject well by colored pencil or hatchure marks on the plat below.


2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).

3. If more than one lease of different ownership is dedicated to the well, have the interest of all owners been consolidated by communitization, unitization, force-pooling, etc.?

☐ Yes ☐ No If answer is "yes" type of consolidation

If answer is "no" list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.)

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interest, has been approved by the Division.

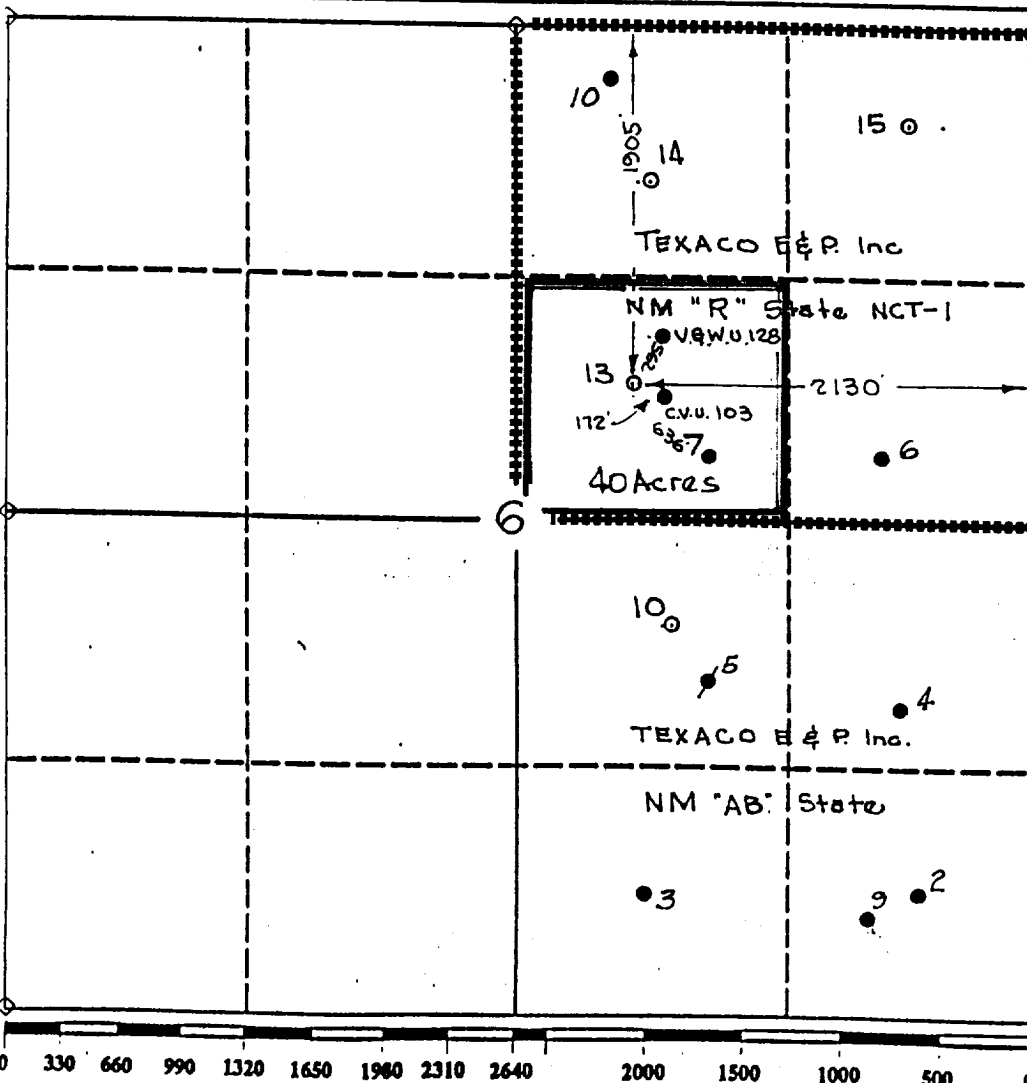

OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

Signature
Royce D. Mariott
Printed Name
Royce D. Mariott
Position
Division Surveyor
Company
Texaco Expl. & Prod. Inc.
Date
May 25, 1993

SURVEYOR CERTIFICATION



I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed
May 24, 1993
Signature & Seal of
Professional Surveyor
John S. Piper
Certificate No.
7254 John S. Piper
Lea Co. FB. 9, Pg.

**DRILLING CONTROL
CONDITION II-B 3000 WP**

**FOR AIR DRILLING OR
WHERE NITROGEN OR AIR BLOWS ARE EXPECTED**

H₂S TRIM REQUIRED
YES X NO

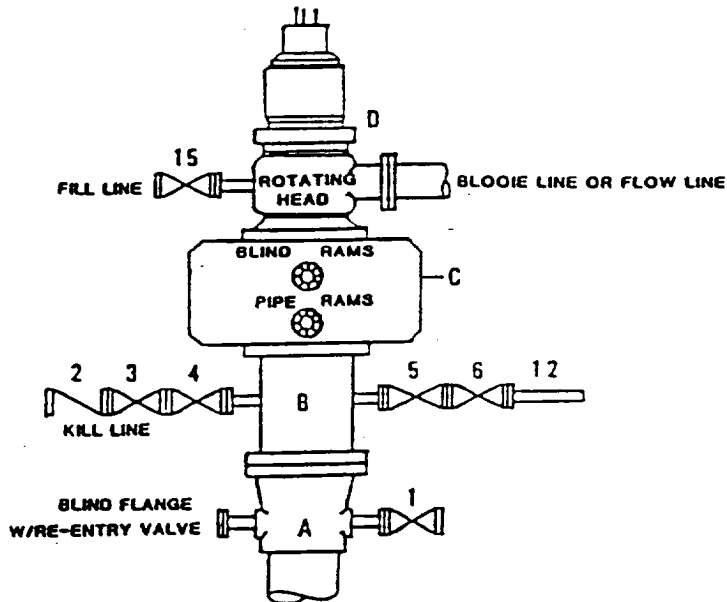

DRILLING CONTROL

MATERIAL LIST - CONDITION II - B

- | | |
|----------------|---|
| A | Texaco Wellhead |
| B | 3000# W.P. drilling spool with a 2" minimum flanged outlet for kill line and 3" minimum flanged outlet for choke line. |
| C | 3000# W.P. Dual ram type preventer, hydraulic operated with 1" steel, 3000# W.P. control lines (where sub-structure height is adequate, 2 - 3000# W.P. single ram type preventers may be utilized). |
| D | Rotating Head with fill up outlet and extended Blooie Line. |
| 1,3,4,
7,8, | 2" minimum 3000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve. |
| 2 | 2" minimum 3000# W.P. back pressure valve. |
| 5,6,9 | 3" minimum 3000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve. |
| 12 | 1" minimum schedule 80, Grade "B", seamless line pipe. |
| 13 | 2" minimum x 3" minimum 3000# W.P. flanged cross. |
| 10,11 | 2" minimum 3000# W.P. adjustable choke bodies. |
| 14 | Cameron Mud Gauge or equivalent (location optional in choke line). |
| 15 | 2" minimum 3000# W.P. flanged or threaded full opening steel gate valve, or Halliburton Lo Torc Plug valve. |



TEXACO, INC.
MIDLAND DIVISION
MIDLAND, TEXAS



SCALE _____ DATE _____ EST NO _____ PRG NO _____

DRAWN BY _____

EXHIBIT C

RECEIVED
MAY 28 1993
OCD HOBBS OFFICE