

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

N.M. Oil Cons. Division  
P.O. Box 1980  
Hobbs, NM 88240

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

**SUBMIT IN TRIPLICATE**

1. Type of Well  
☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

CROSS TIMBERS OPERATING COMPANY

3. Address and Telephone No.

3000 N. Garfield, Suite 175 Midland, Texas 79705 (915) 682-8873

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

2,310' FEL & 1,650' FSL  
Sec 30, T 17S, R 33E, NMPM

5. Lease Designation and Serial No.

LC-060967

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

SEMGSAU #110

9. API Well No.

30-025-33905

10. Field and Pool, or Exploratory Area

Maljamar Grayburg SanAn

11. County or Parish, State

Lea County, New Mexico

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent  
☒ Subsequent Report  
☐ Final Abandonment Notice

TYPE OF ACTION


- ☐ Abandonment  
☐ Recompletion  
☐ Plugging Back  
☐ Casing Repair  
☐ Altering Casing  
☒ Other

- ☐ Change of Plans  
☐ New Construction  
☐ Non-Routine Fracturing  
☐ Water Shut-Off  
☐ Conversion to Injection  
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

MIRU Norton Drilling Rig #7. Spudded well @ 5:45 PM 4-5-97. Drilled 12-1/4" hole to 400'. Ran 9 jts of new 8-5/8", 24#, J-55, STC csg & set @ 394'. Cemented w/250 sx Class "C" cmt w/2% CaCl, circulated 2l sx cmt to surface. NU WH & BOP. Tested csg & BOPE to 1,000 psig. Drilled 7-7/8" hole to 4,377'. TD hole at 12:15 PM 4-12-97. Ran 107 jts new 5-1/2", 15.5# J-55, LTC csg, set @ 4,377'. Cemented w/750 sx 35/65 Pozmix "C" cmt w/6% Gel & 5% Salt and followed w/200 sx Class "C" cmt w/0.6% FL-62, 0.2% CD-32, and 0.2% SMS. Circ 106 sx to surface. PD @ 9:30 PM 4-11-97. Released rig. WOCU.

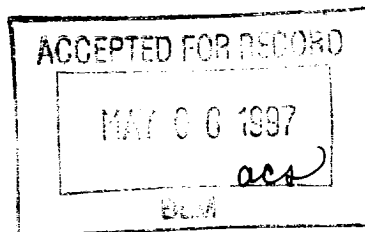

RECEIVED

APR 25 '97

ROSWELL, NM

14. I hereby certify that the foregoing is true and correct

Signed Mark A. Gosch Title Drilling Engineer

Date 4-24-97

(This space for Federal or State office use)

Approved by \_\_\_\_\_  
Conditions of approval, if any:

Title \_\_\_\_\_

Date \_\_\_\_\_

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*See Instruction on Reverse Side