

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Hobbs, NM 88241

U.S. DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Hobbs, NM 88241
(See instructions on reverse side)

FORM APPROVED
OMB NO. 1004-0137
Expires: February 28, 1995


WELL COMPLETION OR RECOMPLETION REPORT AND LOG*

1a. TYPE OF WELL:		OIL WELL <input type="checkbox"/>	GAS WELL <input checked="" type="checkbox"/>	DRY <input type="checkbox"/>	Other <input type="checkbox"/>
b. TYPE OF COMPLETION:		NEW WELL <input checked="" type="checkbox"/>	WORK OVER <input type="checkbox"/>	DEEP-EN <input type="checkbox"/>	PLUG BACK <input type="checkbox"/>
				DIFF. RESVR. <input type="checkbox"/>	Other <input type="checkbox"/>
2. NAME OF OPERATOR Mewbourne Oil Company					
3. ADDRESS AND TELEPHONE NO. P. O. Box 5270, Hobbs, NM 88241					
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements) At surface 2310' FSL and 990' FEL of Section 28 At top prod. interval reported below 2310' FSL and 990' FEL of Section 28 At total depth Same					
15. DATE SPUDDED 07/01/98		16. DATE T.D. REACHED 08/12/98		17. DATE COMPL. (Ready to prod.) 08/27/98	
20. TOTAL DEPTH, MD & TVD 13050		21. PLUG, BACK T.D., MD & TVD 12950		22. IF MULTIPLE COMPL., HOW MANY* NA	
24. PRODUCING INTERVAL(S), OF THIS COMPLETION-TOP, BOTTOM, NAME (MD AND TVD)* 12292-12306, Atoka		14. PERMIT NO.		DATE ISSUED 04/15/98	
26. TYPE ELECTRIC AND OTHER LOGS RUN DIL		18. ELEVATIONS (DF, RKB, RT, GE, ETC.)* 3725 GR		12. COUNTY OR PARISH Lea	
		19. ELEV. CASINGHEAD 3725		13. STATE NM	
		23. INTERVALS DRILLED BY ROTARY TOOLS X		CABLE TOOLS	
		25. WAS DIRECTIONAL SURVEY MADE No		27. WAS WELL CORED No	

28. CASING RECORD (Report all strings set in well)					
CASING SIZE/GRADE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	TOP OF CEMENT, CEMENTING RECORD	AMOUNT PULLED
13-3/8"	48#	560'	17-1/2"	Surface, 250 sks Lite, 200 sks C	None
9-5/8"	40#	4370'	12-1/4"	Surface, 1400 sks Lite, 400 sks C	None
5-1/2"	17#, 20#	13050'	8-3/4"	6390', 1350 sks H	None


29. LINER RECORD					30. TUBING RECORD		
SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
					2-7/8"	12268'	12256'
31. PERFORATION RECORD (Interval, size and number) 12292-12306, 0.50", 61 shots					32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.		
					DEPTH INTERVAL (MD)		
					AMOUNT AND KIND OF MATERIAL USED		

33. * PRODUCTION							
DATE FIRST PRODUCTION 08/27/98		PRODUCTION METHOD (Flowing, gas lift, pumping—size and type of pump) Flowing				WELL STATUS (Producing or shut-in) Producing	
DATE OF TEST 08/28/98	HOURS TESTED 24	CHOKE SIZE 14/64"	PROD'N FOR TEST PERIOD →	OIL—BBL. 746	GAS—MCF. 1999	WATER—BBL. 0	GAS-OIL RATIO 2680
FLOW. TUBING PRESS. 2100	CASING PRESSURE Pkr	CALCULATED 24-HOUR RATE →	OIL—BBL. 746	GAS—MCF. 1999	WATER—BBL. 0	OIL GRAVITY-API (CORR.) 54	
34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.) Sold							
35. LIST OF ATTACHMENTS							

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records.	
SIGNED 	TITLE District Manager
DATE 09/04/98	

(See Instructions and Spaces for Additional Data on Reverse Side)

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

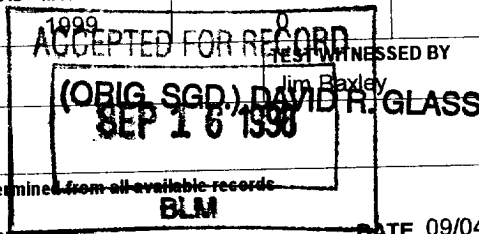

37. SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; cored intervals; and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries):

FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.
Atoka Carbonate	12292	12306	<p>12292-12306</p> <p>12292-12306 A 5 32</p> <p>12292-12306</p>

38. GEOLOGICAL MARKERS			38. GEOLOGICAL MARKERS		
NAME	TOP		NAME	TOP	
	MEAS. DEPTH	TRUE VERT. DEPTH		MEAS. DEPTH	TRUE VERT. DEPTH
Queen	3866'	3866'			
San Andres	4258'	4258'			
Delaware	4672'	4672'			
Bone Spring	7029'	7029'			
Strawn	11620'	11620'			
Atoka	12030'	12030'			
Morrow	12546'	12546'			