

22 ~~7572~~ New Mexico Oil Conservation Division, District I
UNITED STATES 1625 N. French Dr.
DEPARTMENT OF THE INTERIOR Hobbs, NM 88240
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK

DRILL ☒ DEEPEN ☐

b. TYPE OF WELL

OIL WELL ☒ GAS WELL ☐ OTHER ☐ SINGLE ZONE ☒ MULTIPLE ZONE ☐

2. NAME OF OPERATOR

RAY WESTALL

3. ADDRESS AND TELEPHONE NO.

P.O. BOX 4, LOCO HILLS, NM 88255 505.677.2370

4. LOCATION OF WELL (REPORT LOCATION CLEARLY AND IN ACCORDANCE WITH ANY STATE REQUIREMENTS)

AT SURFACE 990' FNL & 1658' FWL

AT PROPOSED PROD. ZONE

SAME

R-111-P Potash

5. LEASE DESIGNATION AND SERIAL NO.

NM 35612

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME, WELL NO.

POLEWSKI FEDERAL # 2

9. API WELL NO.

30-025-35340

10. FIELD AND POOL, OR WILDCAT

LUSK DELAWARE West

11. SEC., T., R., M., OR BLK

AND SURVEY OR AREA

SEC 31-T19S-R32E

12. COUNTY OR PARISH

LEA

13. STATE

NEW MEXICO

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE

16 MILES SE OF LOCO HILLS NM

15. DISTANCE FROM PROPOSED

LOCATION TO NEAREST

PROPERTY OR LEASE LINE, FT.

(Also to nearest drlg. unit line, if any)

990'

16. NO. OF ACRES IN LEASE

360

17. NO. OF ACRES ASSIGNED

TO THIS WELL

40

18. DISTANCE FROM PROPOSED LOCATION

TO NEAREST WELL DRILLING, COMPLETED,

OR APPLIED FOR, ON THIS LEASE, FT.

990'

19. PROPOSED DEPTH

7300'

20. ROTARY OR CABLE TOOLS

RT.

21. ELEVATIONS (Show whether DF, RT, GR, etc.)

3518' GR.

APPROX. DATE WORK WILL START

ASAP

23.

PROPOSED CASING AND CEMENTING PROGRAM

Carbon Controlled Water Resin

| SIZE OF HOLE | GRADE, SIZE OF CASING | WT PER FT | SETTING DEPTH | QUANTITY OF CEMENT |
|--------------|-----------------------|-----------|---------------|---------------------|
| 17 1/2" | 13 3/8 H-40 | 48# STC | 850' | 350 SXS CIRCULATED |
| 11" | 8 5/8 J-55 | 32# STC | 4000' | 1500 SXS CIRCULATED |
| 7 7/8" | 5 1/2" J-55 | 15.5# LTC | 7300' | 1300 SXS CIRCULATED |

ALL CASING WILL BE NEW, OR USED MEETING BLM SPECS.

CEMENT QUANTITIES AND ADDITIVES ARE SUBJECT TO CHANGE DUE TO HOLE CONDITIONS.

* FILLER CEMENT 35/65 "C" POZ w/ 6% GEL, 5# SALT, & 1/4# FLOSEAL

** LEAD: 1100 SX "H" POZ w/ 2% GEL & 5# SALT PER SACK

TAIL: 500 SX "H" w/ 3% KCL, .5% FLUID LOSS, .3% DISPERSANT, 1% BONDING AGENT, .3% RETARDER, & .2% SODIUM METASILICATE PER SACK

PROPOSED MUD PROGRAM

| | |
|----------|--------------------|
| 0-850' | FRESH WATER |
| 850-4000 | BRINE WATER |
| 4000-TD | CUT BRINE 8.7-8.9# |

MUD PROGRAM SUBJECT TO CHANGE DUE TO HOLE CONDITIONS

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24.

SIGNED

Randall Harris

TITLE

Geologist

DATE

6/17/02

(THIS SPACE FOR)

PERMIT NO.

OPER. OGRID NO. 18862

PROPERTY NO. 17572

POOL CODE 41540

APPLICATION APPROV
CONDITIONS O

EFF. DATE 8-16-02

API NO. 30-025-35340

APPROVED BY

ISI RICHARD A. WHITLEY

APPROVAL DATE

TITLE

ACTING STATE DIRECTOR

DATE

AND 115 2002

TITLE 18 U.S.C. SECTION 1001, MAKES IT A CRIME FOR ANY PERSONS KNOWINGLY AND WILLFULLY TO MAKE TO ANY DEPARTMENT OR AGENCY OF THE UNITED STATES ANY FALSE, FICTITIOUS OR FRAUDULENT STATEMENTS OR REPRESENTATIONS AS TO ANY MATTER WITHIN ITS JURISDICTION

APPROVAL SUBJECT TO
GENERAL REQUIREMENTS AND
SPECIAL STIPULATIONS
ATTACHED

APPROVAL FOR 1 YEAR

KZ

New Mex. OPER. OGRID NO. 18862
PROPERTY NO. 17522
UNIT POOL CODE 41540
DEPARTMENT OFF. DATE 1/12/01
BUREAU OF APIN NO. 30-025-35340
APPLICATION FOR PERMIT

- LIGATE*
ions on
e)FORM APPROVED
OMB NO. 1004-0136
Expires: February 28, 1995

1a. TYPE OF WORK

DRILL ☒DEEPEN ☐

b. TYPE OF WELL

OIL
WELL ☒GAS
WELL ☐

OTHER

SINGLE
ZONE ☐MULTIPLE
ZONE ☐

2. NAME OF OPERATOR

RAY WESTALL

3. ADDRESS AND TELEPHONE NO.

Box 4 Loco Hills, NM 88255 505-677-2370

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)*

At surface 990' FNL & 1658 FWL

At proposed prod. zone

Unit C

SECRETARY'S POTASH

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*

16 MILES SE of Loco Hills

15. DISTANCE FROM PROPOSED*

LOCATION TO NEAREST
PROPERTY OR LEASE LINE, FT.
(Also to nearest drlg. unit line, if any)

990'

16. NO. OF ACRES IN LEASE

360'

17. NO. OF ACRES ASSIGNED
TO THIS WELL

40

18. DISTANCE FROM PROPOSED LOCATION*
TO NEAREST WELL, DRILLING, COMPLETED,
OR APPLIED FOR, ON THIS LEASE, FT.

990'

19. PROPOSED DEPTH

7300

20. ROTARY OR CABLE TOOLS

Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)

3518' GR.

CAPTAIN CONTROLLED WATER BASIN

22. APPROX. DATE WORK WILL START*

ASAP

23. PROPOSED CASING AND CEMENTING PROGRAM

| SIZE OF HOLE | GRADE SIZE OF CASING | WEIGHT PER FOOT | SETTING DEPTH | QUANTITY OF CEMENT |
|--------------|----------------------|-----------------|---------------|-----------------------------|
| 17 1/2 | 13 3/8 H-40 | 48# STC | 500 850' | 350 SXS CIRCULATED |
| 11" | B 7/8 J-55 | 32# J-55 STC | 4000 | 1500 SXS CIRCULATED |
| 7 7/8 | 5 1/2 J-55 | 15.5# LTC | 7300 | 1300 SXS SET FOR 3000' CIRC |

ALL CASING WILL BE NEW

N-STRING AREA - WAIVER
GRANTED BY OCDTHE SURFACE HOLE WILL BE DRILLED WITH FRESH WATER, INTERMEDIATE
WITH 10PPG BRINE, PRODUCTION WITH CUT BRINE 8.7-8.9 PPG.A 900' BOP WILL BE INSTALLED ON THE 13 3/8" CASING AND TESTED TO 3000#
PRIOR TO DRILL OUT.

THIS APPLICATION WAS ORIGINALLY APPROVED ON 8/14/96
APPROVAL SUBJECT TO
GENERAL REQUIREMENTS AND
SPECIAL STIPULATIONS

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24.

SIGNER

TITLE

DATE

(This space for Federal or State office use)

PERMIT NO.

APPROVAL DATE

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
CONDITIONS OF APPROVAL, IF ANY:

(ORIG. SGD.) M. J. CHAVEZ

STATE DIRECTOR

APPROVED BY

TITLE

DATE

*See Instructions On Reverse Side

APPROVED FOR 1 YEAR



NEW MEXICO ENERGY, MINERALS
& NATURAL RESOURCES DEPARTMENT

Gary Johnson

GOVERNOR

Jennifer A. Salisbury

CABINET SECRETARY

12/1/00

Randy Harris, Geologist

Ray Westall

POB 4

Loco Hills, NM 88255

Reference: CHI Federal #1 S18-T19-R33E

Ploewski Federal #2 S31-T19-R32E

Dear Mr. Harris:

I do not have a problem with Ray Westall running three strings of casing in these sections, since area wells have similar well construction. I do however, want Ray Westall to circulate all three strings back to surface with cement.

Sincerely,

Chris Williams

District 1 Supervisor

CC: Larry Bray, BLM

District I
PO Box 1980, Hobbs, NM 88241-1980
District II
PO Drawer DD, Artesia, NM 88211-0719
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
PO Box 2088, Santa Fe, NM 87504-2088

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION
PO Box 2088
Santa Fe, NM 87504-2088

Form C-102
Revised February 10, 1994
Instructions on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

| | | | |
|----------------------------|-----------------------------------|--------------------|-----------------------------------|
| API Number 30-025-35340 | | Pool Code 41540 | Pool Name Lusk, Delaware, West |
| Property Code 17572 | Property Name Polewski Federal | | Well Number 2 |
| OGRID No. 18862 | Operator Name Ray Westall | | Elevation 3518 |

¹⁰ Surface Location


| UL or lot no. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County |
|---------------|---------|----------|-------|---------|---------------|------------------|---------------|----------------|--------|
| C | 31 | 19 S | 32 E | | 990 | North | 1658 | West | Lea |

¹¹ Bottom Hole Location If Different From Surface

| UL or lot no. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County |
|---------------|---------|----------|-------|---------|---------------|------------------|---------------|----------------|--------|
| | | | | | | | | | |

| | | | |
|-----------------------|-----------------|--------------------|-----------|
| Dedicated Acres 40 | Joint or Infill | Consolidation Code | Order No. |
|-----------------------|-----------------|--------------------|-----------|

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION
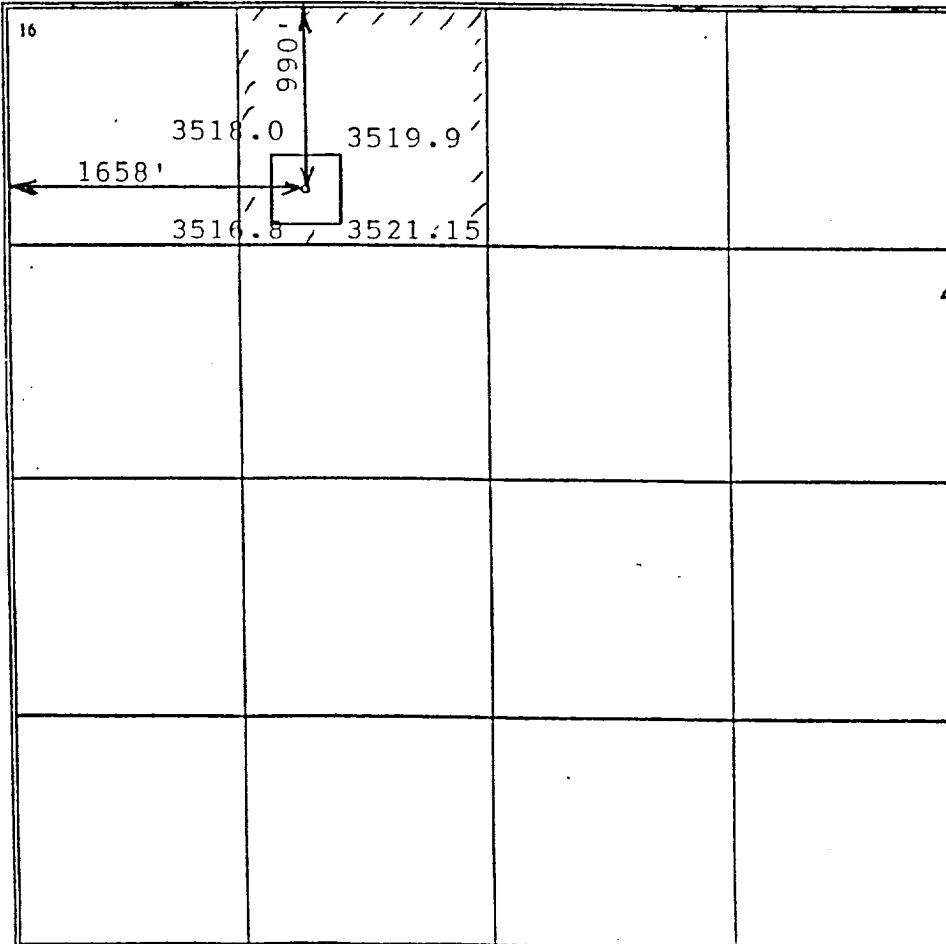
| | | |
|--|--|--|
|  | <p>¹⁷ OPERATOR CERTIFICATION</p> <p>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.</p> <p>Signature RANDALL L. HARRIS</p> <p>Printed Name GEOLOGIST</p> <p>Title 6/20/96</p> <p>Date</p> | |
| | <p>¹⁸ SURVEYOR CERTIFICATION</p> <p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p> <p>November 2, 1995</p> <p>Date of Survey R. P. Patton</p> <p>Signature and Seal of Professional Surveyor</p> <p>Certificate No. 8112</p> | |
| | | |
| | | |

APPLICATION FOR DRILLING

Ray Westall
Polewski Federal No. 2
990' FNL & 1658 FWL
Section 31
Township 19 South, Range 32 East
Lea County, New Mexico

In conjunction with Form 3160-3, Application for Permit to Drill, Ray Westall submits the following ten items of pertinent information in accordance with BLM requirements:

1. The geological surface formation is Quaternary.
2. The estimated tops of geologic markers are as follows:

| | |
|--------------|------|
| Yates | 2500 |
| Seven Rivers | 2750 |
| Delaware | 4200 |
| Bone Springs | 7250 |
3. The estimated depths at which anticipated water, oil & gas formations are expected to be encountered:
Water 0-180'
Oil and gas zones 4200-7250'
4. Proposed casing program: See 3160-3
5. Pressure Control Equipment:
A ~~10 1/2~~ 900s BOP will be installed on the ~~8 5/8~~ ^{13 3/8}" casing and tested to 3,000# prior to drill out. (AR)
6. Mud Program:
Fresh water in surface hole.
(AR) 10 ppg Brine Fresh in intermediate hole.
Cut brine in production hole.
7. Auxiliary Equipment: None
8. Logging Program: CNL/FDC/Gr., DLL.
9. No abnormal pressures or temperatures are anticipated.
Estimated BHP is 3500#, Estimated BHT is 130.F
10. Anticipated starting date:
As soon as possible.
Duration: 12 days drilling
5 days completion

MULTI-POINT SURFACE USE AND OPERATIONS PLAN

RAY WESTALL
POLEWSKI FEDERAL NO. 2

This plan is submitted with form 3160-3, Application for Permit to Drill, covering the above described well. The purpose of this plan is to describe the location of the proposed well, the proposed construction activities and operations plan, the magnitude of surface disturbance involved, and the procedures to be followed in rehabilitating the surface after completion of the operations, so that a complete appraisal can be made of the environmental effect associated with the operation.

1. Existing Roads.

Exhibit A is a portion of a county road map showing the roads in the vicinity of the proposed location.

2. Planned Access Road.

No access road is needed.

Directions:

Proceed west from Loco Hills to state road 529. Go east approximately 7 miles, turn south on county road 126 for 11 miles, turn west on caliche road .50 miles, location is on the south side of road.

3. Location of Existing Wells.

Exhibit B is a topo map showing the existing wells.

4. Location of Existing/or proposed Facilities:

If productive a 3" SDR 7 poly line will be laid along existing ROW the battery located on the Polewski Federal No.1 location. A 4 phase power line and poles will be routed along the existing ROW paralleling the road.

5. Location and Type of Water Supply.

It is planned to drill the proposed well with fresh and brine water system. The water will be obtained from commercial sources and will be hauled to the location by truck.

6. Source of Construction Materials.
The location and road will be hauled in from an approved caliche pit.
7. Methods of Handling Waste Disposal.
 - A. Drill cuttings will be disposed of in the reserve pit.
 - B. Drilling fluids will be allowed to evaporate in the reserve pits until the pits are dry.
 - C. Produced water during operations will be stored in reserve pits until dry.
 - D. Oil produced during operations will be stored in tanks until sold.
 - E. Current laws and regulations pertaining to the disposal of human waste will be complied with.
 - F. Trash, waste paper, garbage and junk will be stored in a wire cage preventing blowing or scattering by the wind. After drilling and completion all waste will be removed to an approved site.
8. Ancillary Facilities
None required.
9. Wellsite Layout.
Exhibit C shows the relative location and dimensions of the well pad, the reserve pits, a 400' X 400' area has been staked and flagged.
10. Plans For Restoration of The Surface.
 - A. After finishing drilling and completion operations, all equipment and other material not needed for further operations will be removed. The location will be cleaned of all trash and junk to leave the wellsite in as aesthetically pleasing a condition as possible.
 - B. Unguarded pits, if any containing fluids will be fenced until they have been filled.
 - C. If the proposed well is non-productive, all rehabilitation and or vegetation requirements of the BLM and USGS will be complied with and will be accomplished as expeditiously as possible. All pits will be filled and leveled within 90 days after abandonment.

- B. Protective equipment for essential personnel:
 - a. Mark II Surviveair 30 minute units located in the dog house and at briefing areas, as indicated on well site diagram.
- C. H₂S detection and monitoring equipment:
 - a. Two portable monitors positioned on location for best coverage and response. These units have warning lights and sirens when high levels of H₂S is detected.
- D. Visual warning systems:
 - a. Wind direction indicators as shown on well site diagram.
 - b. Caution/Danger signs shall be posted on roads providing direct access to location.
- E. Mud program:
 - a. There is no known high pressure in this drilling area or known high concentrations of H₂S that would necessitate any special drilling fluids.
- F. Metallurgy:
 - a. All drill stings, casings, tubing, wellhead, blowout preventers, drilling spool, kill lines, choke manifold and lines and valves shall be suitable for H₂S service.
- G. Communication:
 - a. Radio communications in company vehicles including cellular telephone and 2-way radio.
- H. Well testing:
 - a. There will be no DST's on this well.

11. Other Information:


- A. Topography: The land surface in the vicinity of the wellsite is sandy loam soil.
- B. Flora and Fauna: The vegetation cover consists of prairie grass, greasewood and miscellaneous desert growth. No wildlife was observed, but wildlife in the area probably includes those typical of semi-arid desert land. The area is used for cattle grazing.
- C. There are no ponds, lakes or rivers in the area.
- D. There are no inhabited dwellings in the vicinity of the proposed well.
- E. Surface ownership is federal.
- F. Evidence of archeological sites has been reported and previously filed by Archaeological Survey Consultants as ASC Job 95-020.

12. Operator's Representative:


Ray Westall
P.O. Box 4,
Loco Hills, NM 88255
(505) 677-2370

13. Certification:


I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route, that I am familiar with the conditions which presently exist; that the statements made in this plan are to the best of my knowledge true and correct; and that the work associated with the operation proposed herein will be performed by the operator and it's subcontractors in conformity with this plan and the terms and conditions under which is approved.

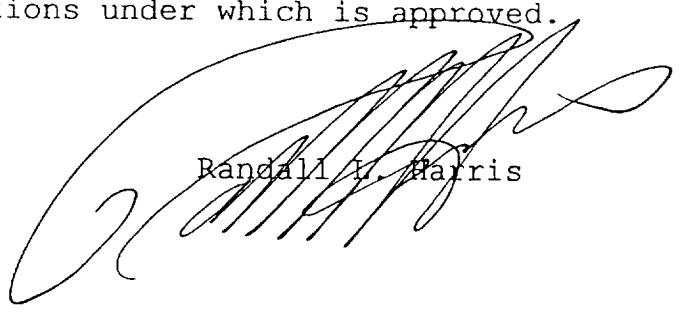


Randall L. Harris



WEA UNILLING CO., INC.
RIG #1
LOCATION & MUD PIT SPEC.

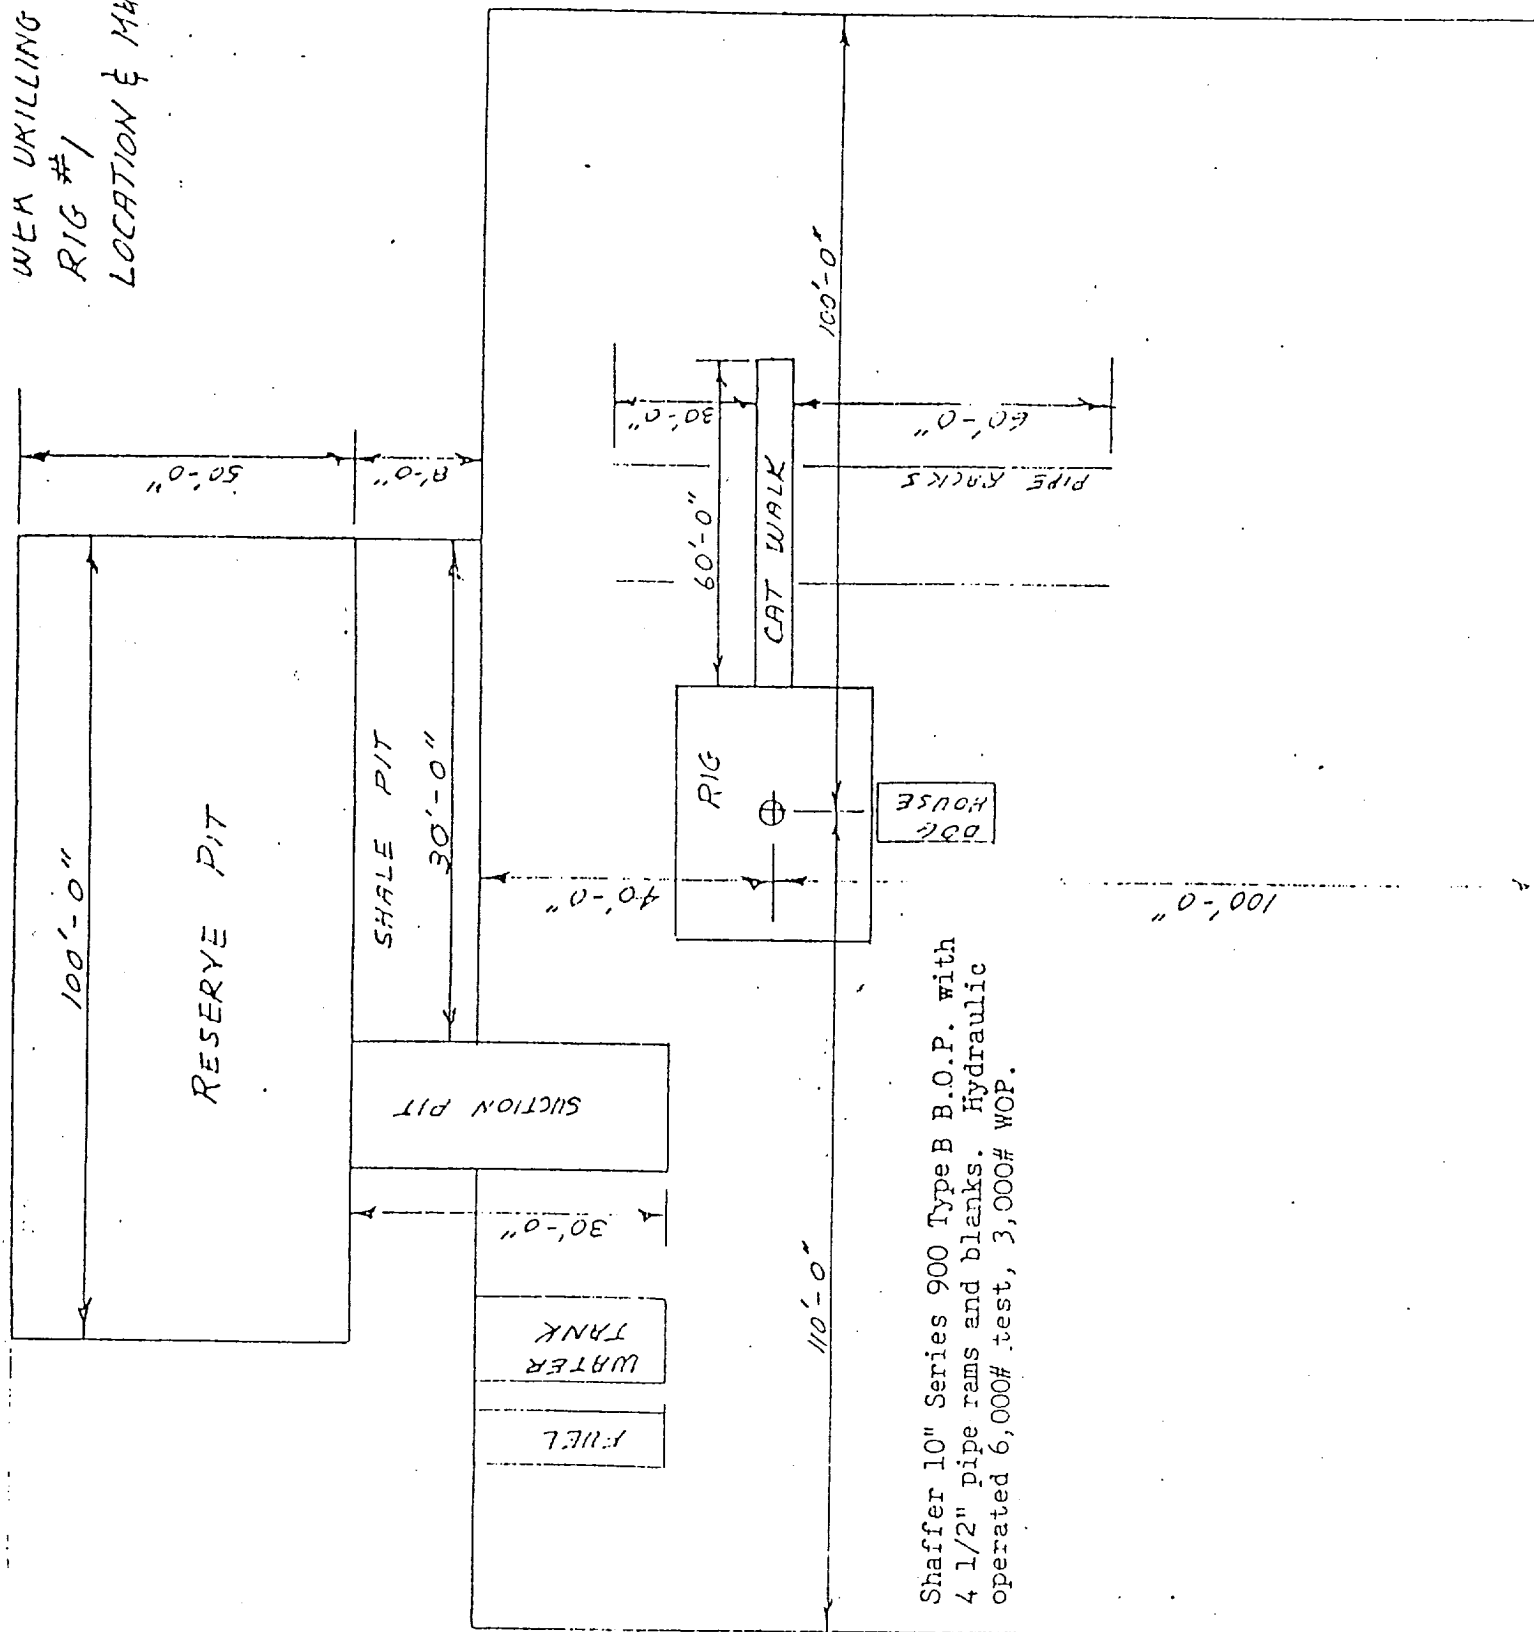

DRAWING NO. 3
Revised April, 1971

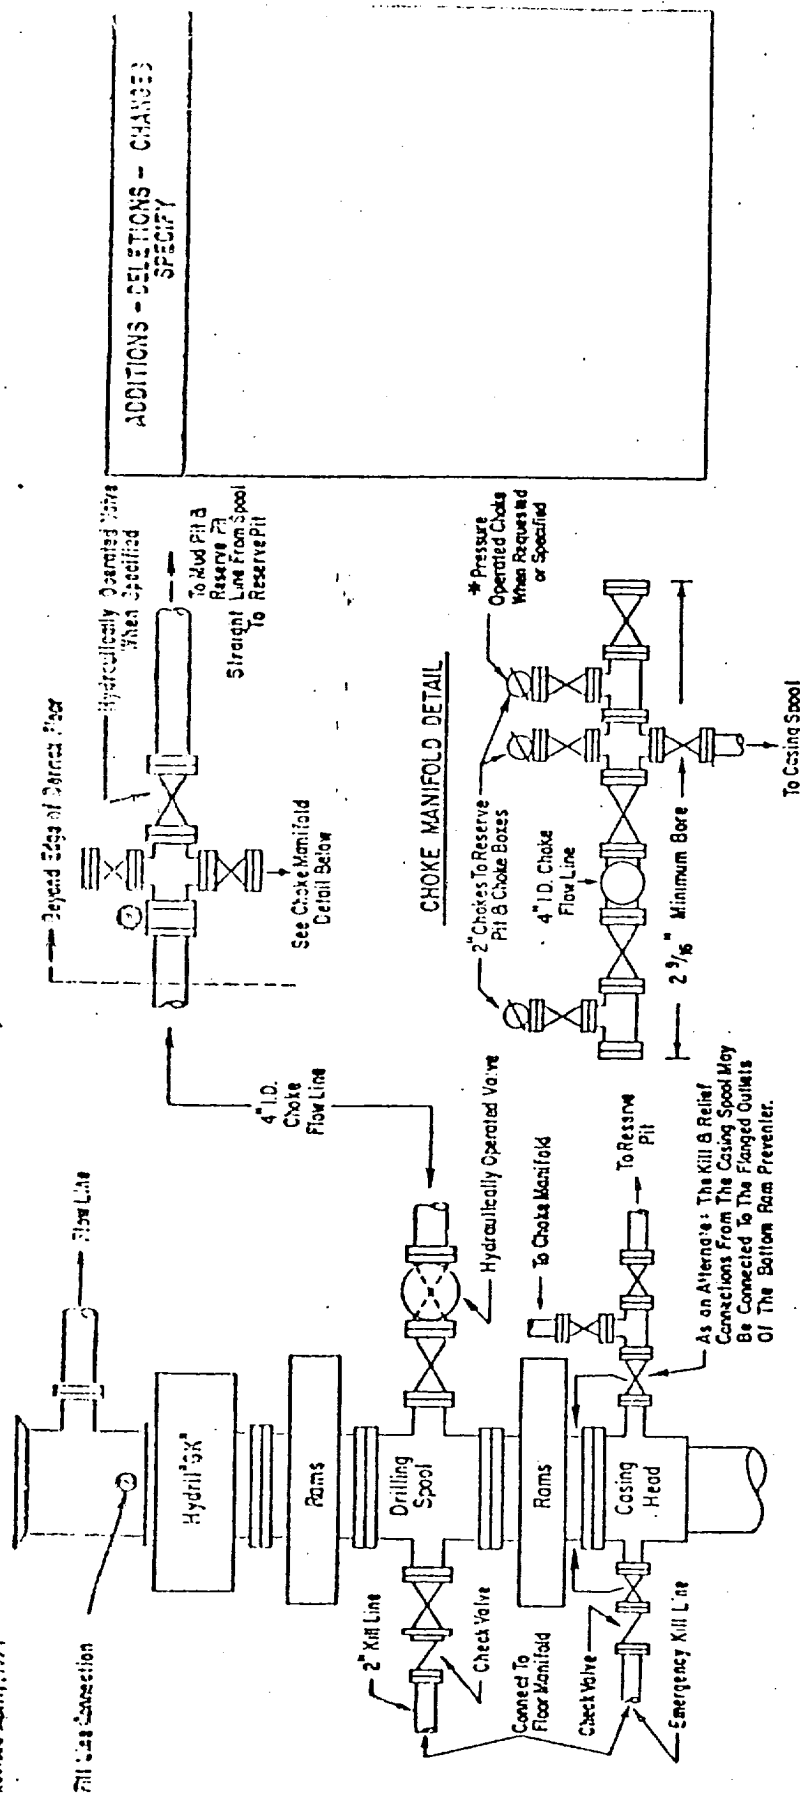

3000 PSI WORKING PRESSURE BLOWOUT PREVENTER HOOK-UP


The blowout preventer assembly shall consist of one blind ram preventer and one pipe ram preventer, both hydraulically operated; a Hydril "GX" preventer; valves; chokes and connections as illustrated. If a tapered drill string is used, a ram preventer must be provided for each size of drill pipe. Casing and tubing rams to fit the preventers are to be available as needed. If correct in size, the flanged outlets of the ram preventer may be used for connecting to the 4-inch I.D. choke flow line and kill line, except when oil or gas drilling. The substructure height shall be sufficient to install a rotating blowout preventer.

Minimum operating equipment for the preventers and hydraulically operated valves shall be as follows: (1) Multiple pumps, driven by a continuous source of power, capable of fluid charging the total accumulator volume from the nitrogen precharge pressure to its rated pressure within _____ minutes. Also, the pumps are to be connected to the hydraulic operating system which is to be a closed system. (2) Accumulators with a precharge of nitrogen of not less than 750 PSI and connected so as to receive the aforementioned fluid charge. With the charging pumps shut down, the pressurized fluid volume stored in the accumulators must be sufficient to close all the pressure-operated devices simultaneously within _____ seconds after closure, the remaining accumulator pressure shall be not less than 1000 PSI with the remaining fluid volume at least _____ percent of the original. (3) When requested, an additional source of power, remote and equivalent, is to be available to operate the above pumps; or there shall be additional pumps operated by separate power and equal in performance capabilities.

The closing manifold and remote closing manifold shall have a separate control for each pressure-operated device. Controls are to be labeled, with control handles indicating open and closed positions. A pressure reducer and regulator must be provided for operating the Hydril preventer. When requested, a second pressure reducer shall be available to limit operating fluid pressures to ram preventer. Gulf Legion No. 28 hydraulic oil, an equivalent or better, is to be used as the fluid to operate the hydraulic equipment.

The choke manifold, choke flow line, and choke lines are to be supported by metal stands and adequately anchored. The choke flow line and choke lines shall be constructed as straight as possible and without sharp bends. Easy and safe access is to be maintained to the choke manifold. All valves are to be selected for operation in the presence of oil, gas, and drilling fluids. The choke flow line valves connected to the drilling spool and all ram type preventers must be equipped with stem extensions, universal joints if needed, and hand wheels which are to extend beyond the edge of the derrick substructure. All other valves are to be equipped with handles.

* To include derrick floor mounted controls.

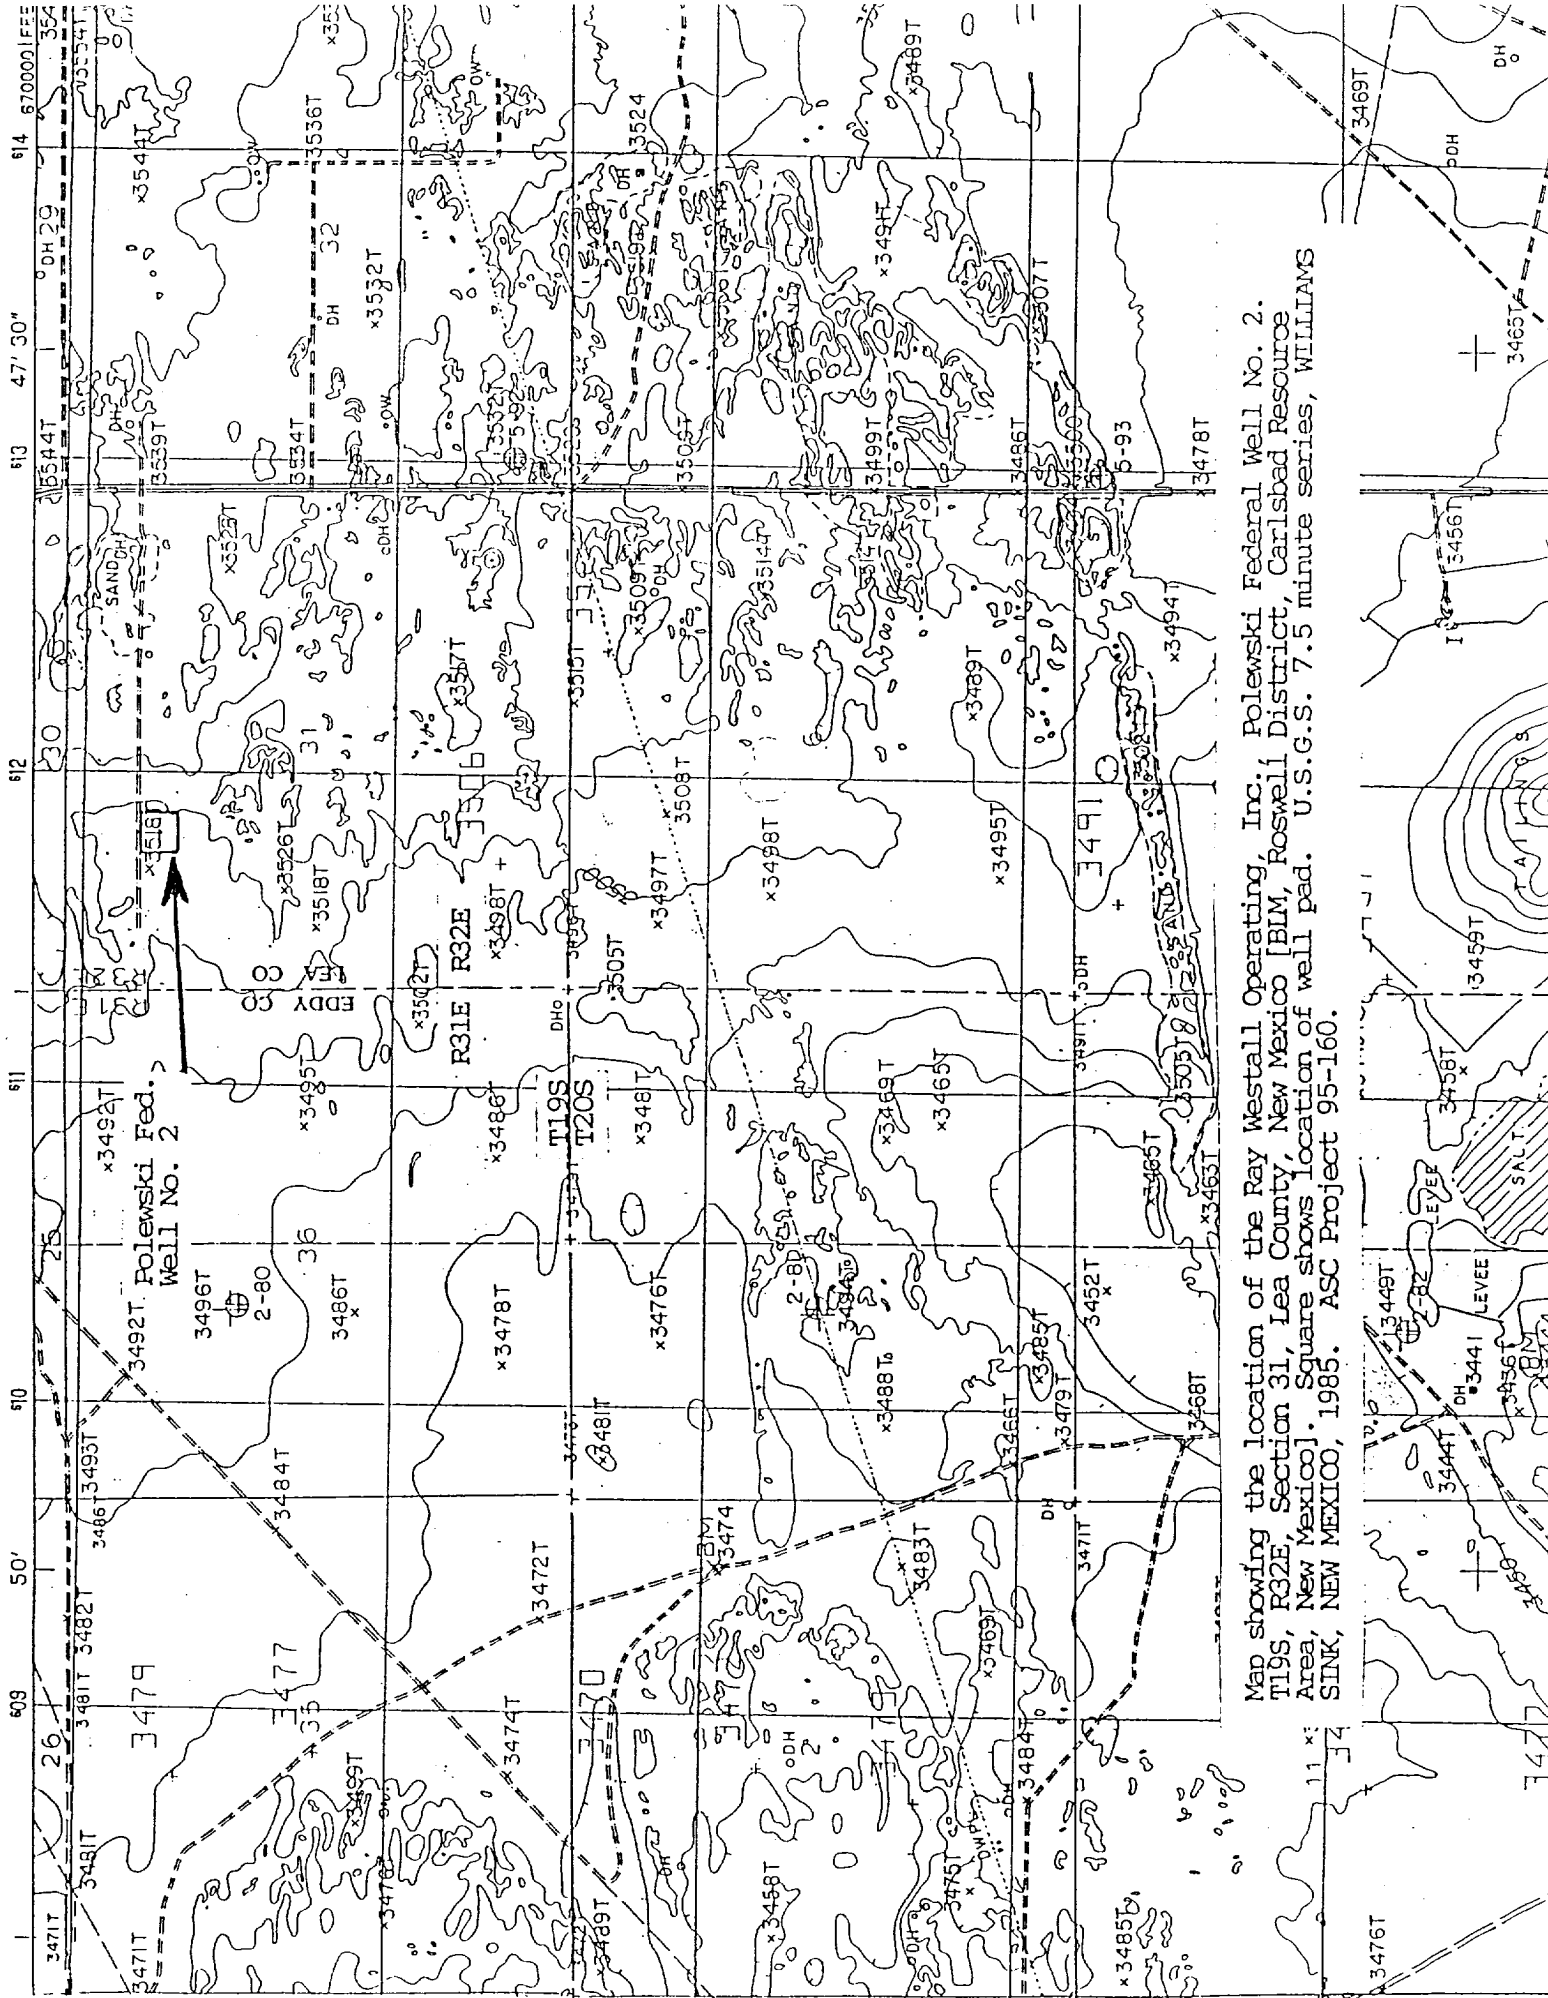

Map showing the location of the Ray Westall Operating, Inc., Polewski Federal Well No. 2. T19S, R32E, Section 31, Lea County, New Mexico [BIM, Roswell District, Carlsbad Resource Area, New Mexico]. Square shows location of well pad. U.S.G.S. 7.5 minute series, WILLIAMS SINK, NEW MEXICO, 1985. ASC Project 95-160.

RAY WESTALL OPERATING

HYDROGEN SULFIDE DRILLING PLAN

1. HYDROGEN SULFIDE TRAINING

All personnel that are connected with the drilling or completion of a well within a known H₂S area will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

- A. The hazards and characteristics of hydrogen sulfide.
- B. The proper use of personal protective equipment and life support systems.
- C. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.


There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days) and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received the proper training.

2. H₂S SAFETY EQUIPMENT AND SYSTEMS

All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H₂S.

A. Well Control Equipment:

- a. Choke manifold with a minimum of one remote choke.
- b. Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit.

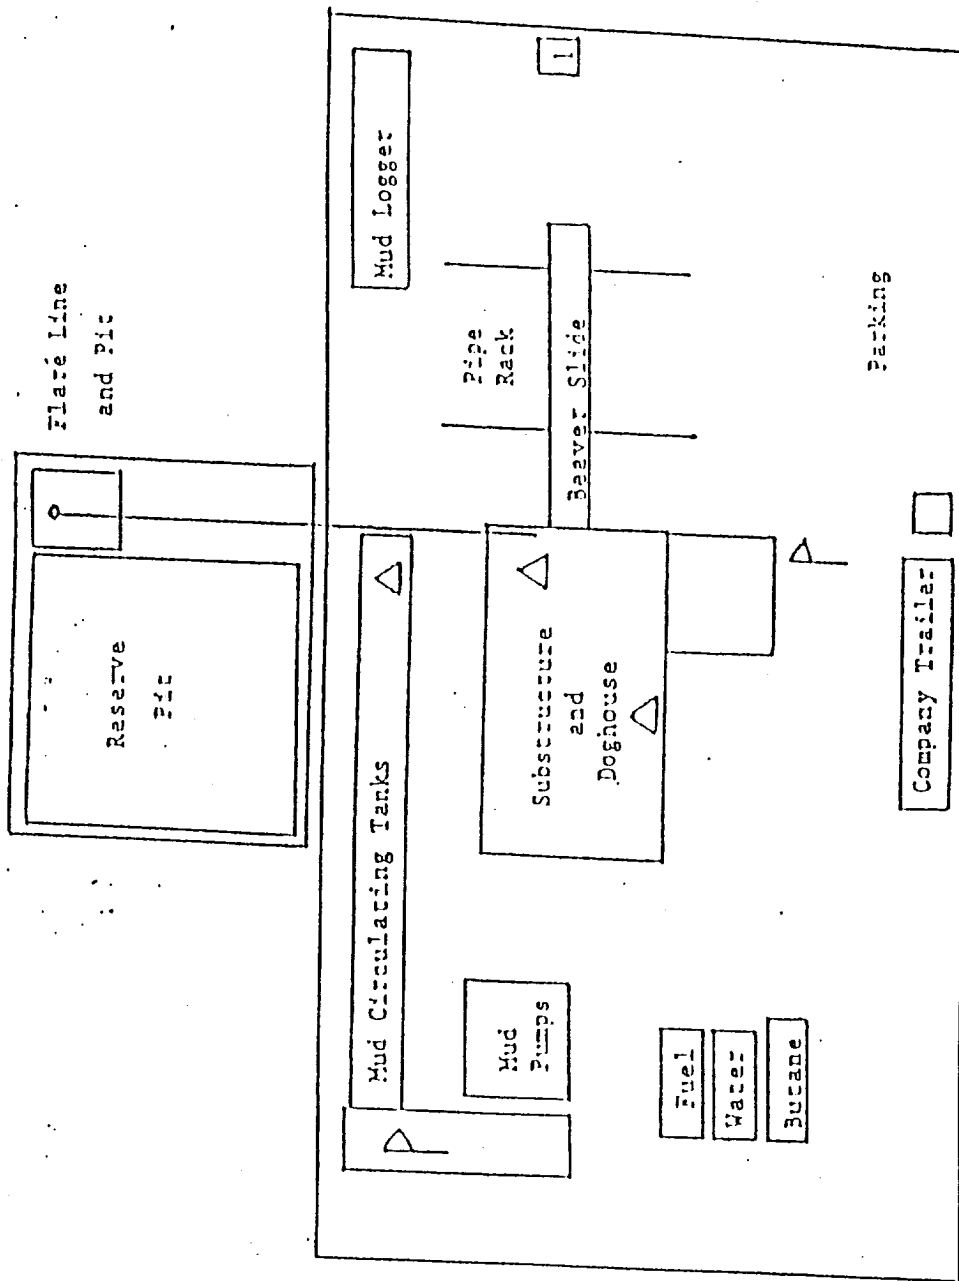

- △ - H2S Monitors with alarms at the bell nipple and shale shaker
- P - Wind Direction Indicators
- - Safe 150 feet areas with caution signs and protective breathing equipment