


WELL DATA SHEET

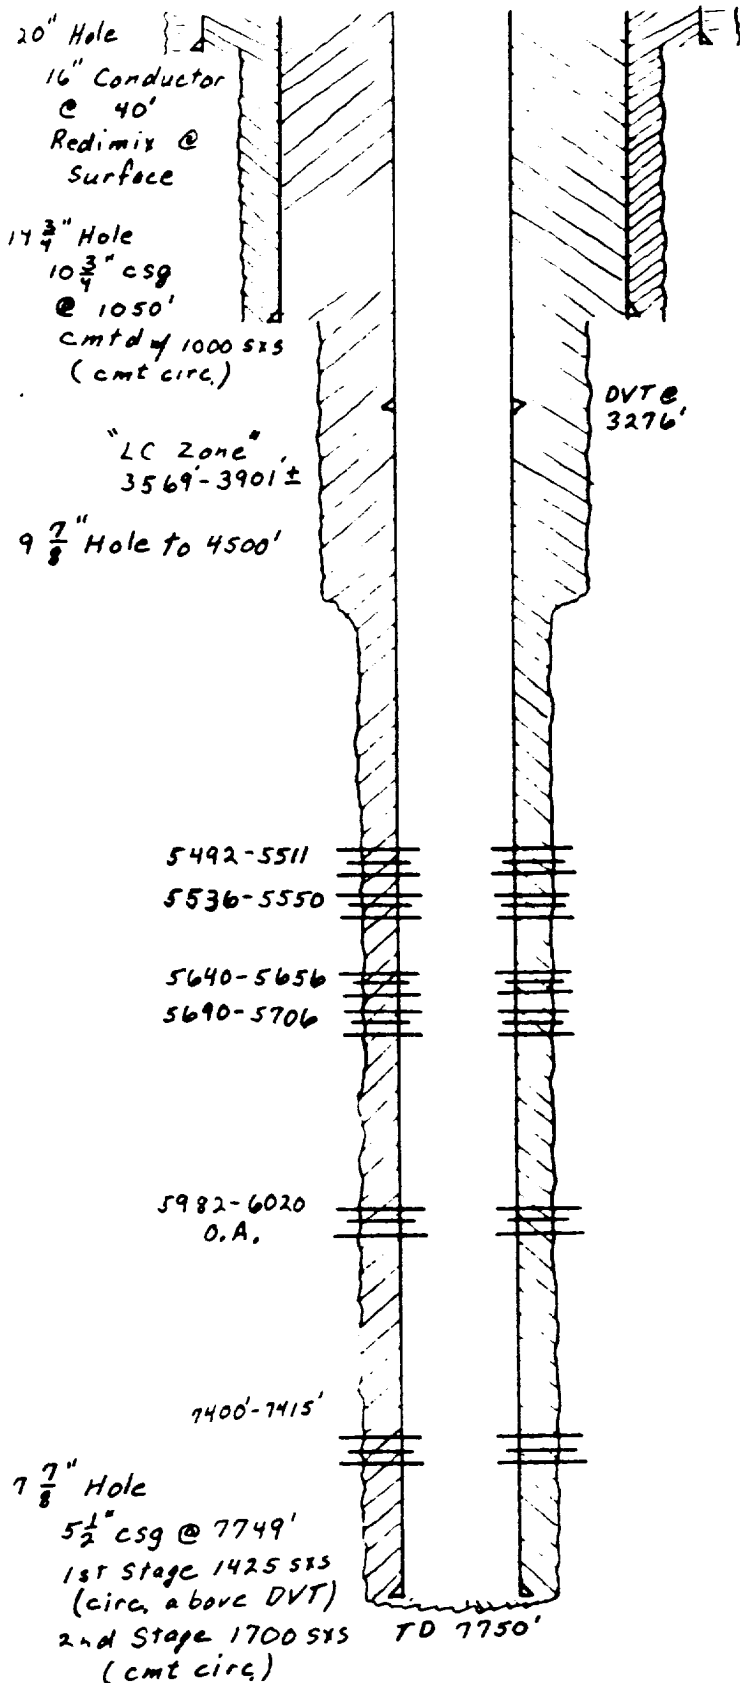

Date Spudded: June 5, 1991
Completed: August 5, 1991
20" Hole
16" csg set @ 40' & redmixed to surface
14-3/4" Hole
10-3/4" csg set @ 1050'
Cmt'd w/1000 sxs (cmt circ.)
9-7/8" Hole to 4500'
LC @ 3569 to 3901±
Regain circ w/400 sxs cmt
Hole 7-7/8" (reduce bit size @ 4500')
TD 7750'
5-1/2" csg @ 7749
FC @ 7702
DVT @ 3276
1st stage w/1425 sxs (cmt to DVT)
Open DVT & circ out 75 sxs
2nd stage w/1700 sxs
circ out 227 sxs

DELAWARE PERFORATIONS

perfs 7400-15 2 SPF
perfs 5982, 86, 89, 92, 96, 98, 6003, 08, 10
13, 16, 20 2 SPF
perfs 5640-56 & 5690-5706
perfs 5492-5511 & 5536-50 2 SPF

RECEIVED

OCT 25 1991

068
HOBBS OFFICE