


OIL CONSERVATION COMMISSION  
Santa Fe, New Mexico

## MISCELLANEOUS REPORTS ON WELLS

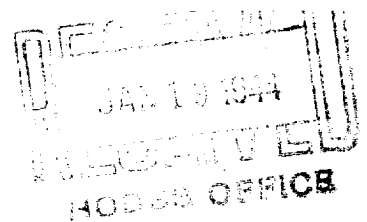

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut-off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below:

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING	
REPORT ON RESULT OF TEST OF CASING SHUT-OFF		REPORT ON DEEPENING WELL	
REPORT ON RESULT OF PLUGGING OF WELL	X		

Hobbs, New Mexico

Place

January 4, 1944

Date

OIL CONSERVATION COMMISSION,  
SANTA FE, NEW MEXICO.  
Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the

H. P. TAUBMAN Company or Operator Sun State Lease Well No. 1 in the

NE NE of Sec. 18, T. 17 S, R. 34 E, N. M. P. M.,  
Vacuum Field, Lea County.

The dates of this work were as follows: January 2-5, 1943

Notice of intention to do the work was (was not) submitted on Form C-102 on January 4, 1944  
and approval of the proposed plan was (was not) obtained. (Cross out incorrect words.)

#### DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

Filled in well with approximately twenty feet of gravel to cover zone producing water plugging back from 5050 to 5020'. Drove 300# lead wool plug on top of gravel to seal off water. Dumped ten sacks of cement on top of lead plug with cement, will be approximately at 5017 to 4986'. Filled hole with mud to 2650', immediately below base of salt. Bridged hole at 2650' and dumped ten sacks of cement at that point, filling hole back to 2620'. Filled hole with mud back to 8 5/8" casing, cemented at top of salt at 1683'. Set bridge in bottom of casing and dumped five sacks of cement at that point. Filled casing to surface with mud. This casing has been cemented to the surface and will be left in the well. Plugged surface of casing with ten sacks of cement, and set regulation marker.

Witnessed by \_\_\_\_\_ Name \_\_\_\_\_ Company \_\_\_\_\_ Title \_\_\_\_\_

Subscribed and sworn before me this 5

day of January, 1944

Norma Belle  
Notary Public

I hereby swear or affirm that the information given above is true and correct.

Name M. Z. Hartwell

Position Agent

Representing H. P. TAUBMAN  
Buffalo Oil Company  
Company or Operator

My commission expires November 20, 1947

Address Midland, Texas

Remarks:

Ray G. Gentry  
Name  
Title