


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

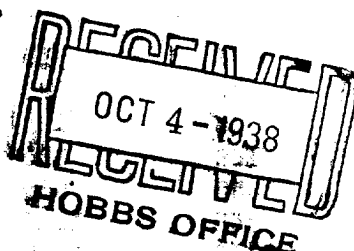

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

DUPLICATE

AREA 640 ACRES
LOCATE WELL CORRECTLY

The Ohio Oil Company

Company or Operator

Hobbs, New Mexico

Address

State Bridges

Lease

Well No. 1

in Hobbs

of Sec. 20

T. 17 S

R24 E

N. M. P. M.

Vacuum

Field

Lee

County

Well is 640 feet south of the North line and 420 feet west of the East line of Sec. 20

If State land the oil and gas lease is No. B-2244 Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Address

Drilling commenced August 14, 1938 19 Drilling was completed Sept. 29 1938

Name of drilling contractor Noble Drilling Company Address Tulsa, Oklahoma

Elevation above sea level at top of casing 4000 feet

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 4702 to 4750 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet

No. 2, from to feet

No. 3, from to feet

No. 4, from to feet

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
9 5/8				444	Reg			
7	24			4240	Float			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11 3/8	9 5/8	444	200	Ballston	10	40
8 3/4	7	4240	700		20	40

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Acid	1,000	9/26/38		
		Acid	2,000	9/29/38		

Results of shooting or chemical treatment increased 400 bbls

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 4755 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing October 1, 1938 19

The production of the first 24 hours was 20 barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

Noble Drilling Company

EMPLOYEES

Red Davis Driller Ace Williams Driller

Bruce Harp Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 4th

day of October 1938

Notary Public

Hobbs, New Mexico

Date

Name Glenn P. ...

Position Supt

Representing The Ohio Oil Company

Address Hobbs, New Mexico

My Commission expires March 2, 1941

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
10	10	10	Cellar shell
10	10	76	Sand & shells
10	10	73	Red beds
10	10	417	Hard shells-red rock-red bed
10	10	480	Red bed
10	10	480	Reddish-shells
10	10	1108	Steel line measurement
10	10	1108	Red rock-anhydrite-shells
10	10	1108	Red rock
10	10	1108	Red rock-shells
10	10	1108	Red rock
10	10	1108	Anhydrite
10	10	1108	Salt-anhydrite
10	10	1108	Anhydrite-streaks of shale
10	10	1108	Anhydrite-shells-unit
10	10	1108	Salt-shells
10	10	1108	Salt-streaks of anhydrite
10	10	1108	Anhydrite-gyp
10	10	1108	Salt-anhydrite-broken
10	10	1108	Anhydrite-gyp
10	10	1108	Anhydrite-gyp
10	10	1108	Brown anhydrite-gyp
10	10	1108	Anhydrite-gyp
10	10	1108	Anhydrite-gyp-thin streak brown line
10	10	1108	Anhydrite-gyp
10	10	1108	Anhydrite-gyp
10	10	1108	Brown & grey lime-anhydrite broken
10	10	1108	Lime-anhydrite-gyp
10	10	1108	Anhydrite-gyp-streaks grey line
10	10	1108	Lime-anhydrite
10	10	1108	Anhydrite-gyp
10	10	1108	Lime-anhydrite-gyp
10	10	1108	Anhydrite-gyp
10	10	1108	Anhydrite-gyp-streaks line
10	10	1108	Anhydrite-gyp-thin streaks brown line
10	10	1108	Lime-anhydrite
10	10	1108	Lime-anhydrite-streaks LINE gyp
10	10	1108	Anhydrite-gyp-brown line
10	10	1108	Anhydrite-gyp
10	10	1108	Grey lime-streaks of gyp
10	10	1108	Lime-anhydrite-gyp
10	10	1108	Anhydrite-lime
10	10	1108	Lime
10	10	1108	Lime-anhydrite
10	10	1108	Lime
10	10	1108	Lime
10	10	1108	Brown broken line
10	10	1108	Brown lime-brown & grey
10	10	1108	Lime
10	10	1108	Red bed
10	10	1108	Lime
10	10	1108	Brown & grey broken line
10	10	1108	Lime
10	10	1108	Very soft lime
10	10	1108	Lime
10	10	1108	Lime-brown & grey
10	10	1108	Lime
10	10	1108	Grey lime
10	10	1108	Lime
10	10	1108	Grey lime-streaks porous lime
10	10	1108	Brown lime-lime
10	10	1108	Lime