

DISTRICT I
P.O. Box 1960, Hobbs, NM 88240DISTRICT II
P.O. Drawer DD, Artesia, NM 88210DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION

P.O. Box 2088
Santa Fe, New Mexico 87504-2088

WELL API NO.	30-025-02079
5. Indicate Type of Lease	STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No.	

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:
OIL WELL ☐ GAS WELL ☐ OTHER ☐ WIW2. Name of Operator Mobil Producing TX & NM INC *
*Mobil Exploration & Producing US Inc. as agent for MPTM3. Address of Operator
P.O. Box 633, Midland, TX 79702

4. Well Location

Unit Letter C : 660 Feet From The North Line and 1980 Feet From The West Line
Section 23 Township 17-S Range R-34E NMPM Lea County10. Elevation (Show whether DF, RKB, RT, GR, etc.)
KB - 403111. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data
NOTICE OF INTENTION TO:PERFORM REMEDIAL WORK ☐PLUG AND ABANDON ☒TEMPORARILY ABANDON ☐CHANGE PLANS ☐PULL OR ALTER CASING ☐OTHER: ☐**SUBSEQUENT REPORT OF:**REMEDIAL WORK ☐ALTERING CASING ☐COMMENCE DRILLING OPNS. ☐PLUG AND ABANDONMENT ☐CASING TEST AND CEMENT JOB ☐OTHER: ☐12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

1. MIRU PU. DIG PIT. FLOW WELL BACK TO PIT. ND WH. NU BOP.
2. RIH W/ WS TO 4034'. LOAD HOLE W/ 10 PPG GELLED BRINE. SPOT 25 SX CLASS C NEAT CMT CAP ON TOP OF CIBP @ 4034'.
3. PUH TO 2920'. SPOT 40 SX CLASS C NEAT CMT PLUG ACROSS SALT BASE @ 2810' AND TOC @ 2870' FROM 2920-2760'.
4. PUH TO 1797'. CUT AND PULL 7" CSG OR PERFORATE AND SQUEEZE 50 SX CLASS C NEAT CMT PLUG ACROSS SALT TOP @ 1747' FROM 1797-1697'. **PLUG MUST BE TAGGED!**
5. PUH TO 874'. SPOT 50 SX CLASS C NEAT CMT PLUG ACROSS 10-3/4" CSG SHOE @ 824' FROM 874-774'. (IF 7" CSG NOT RECOVERED, PERFORATE AND SQUEEZE 50 SX CLASS C NEAT CMT PLUG). **PLUG MUST BE TAGGED!**
6. PUH TO 30'. SPOT 15 SX CLASS C NEAT CMT PLUG FROM 30'-SURFACE. POOH W/ WS.
7. ND BOP. RD PU. DIG OUT CELLAR AND CUT CSG 3' BELOW SURFACE. WELD STEEL PLATE ON CSG STUB. ERECT P&A MARKER WITH WELL NAME AND PLUGGED DATE. FILL CELLAR AND CLEAN SURFACE LOCATION.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Kaye Pollock TITLE Regulatory Technician DATE 08-03-93
TYPE OR PRINT NAME Kaye Pollock TELEPHONE NO. 815-688-2584

(This space for State Use)

Orig. Signed by
Paul Kautz
Geologist

APPROVED BY _____ TITLE _____ DATE _____

CONDITIONS OF APPROVAL, IF ANY:

AUG 05 1993

BRIDGES STATE # 31 WIW
VACUUM GRAYBURG (SAN ANDRES) FIELD
LEA COUNTY, NEW MEXICO


RECOMMENDED WORKOVER PROCEDURE

1. MIRU PU. DIG PIT. FLOW WELL BACK TO PIT. ND WH. NU BOP.
2. RIH W/ WS TO 4034'. LOAD HOLE W/ 10 PPG GELLED BRINE. SPOT 25 SX CLASS C NEAT CMT CAP ON TOP OF CIBP @ 4034'.
3. PUH TO 2920'. SPOT 40 SX CLASS C NEAT CMT PLUG ACROSS SALT BASE @ 2810' AND TOC @ 2870' FROM 2920-2760'.
4. PUH TO 1797'. CUT AND PULL 7" CSG OR PERFORATE AND SQUEEZE 50 SX CLASS C NEAT CMT PLUG ACROSS SALT TOP @ 1747' FROM 1797-1697'. **PLUG MUST BE TAGGED!**
5. PUH TO 874'. SPOT 50 SX CLASS C NEAT CMT PLUG ACROSS 10-3/4" CSG SHOE @ 824' FROM 874-774'. (IF 7" CSG NOT RECOVERED, PERFORATE AND SQUEEZE 50 SX CLASS C NEAT CMT PLUG). **PLUG MUST BE TAGGED!**
6. PUH TO 30'. SPOT 15 SX CLASS C NEAT CMT PLUG FROM 30'-SURFACE. POOH W/ WS.
7. ND BOP. RD PU. DIG OUT CELLAR AND CUT CSG 3' BELOW SURFACE. WELD STEEL PLATE ON CSG STUB. ERECT P&A MARKER WITH WELL NAME AND PLUGGED DATE. FILL CELLAR AND CLEAN SURFACE LOCATION.

BRIDGES STATE
WELL # 31 WIW
VACUUM GRAYBURG (SAN ANDRES) FIELD
LEA COUNTY, NEW MEXICO
CURRENT COMPLETION

KB = 4031'
GL = 4020'

C, 23, T 17-S, R 34-E, 660' FNL, 1980' FWL

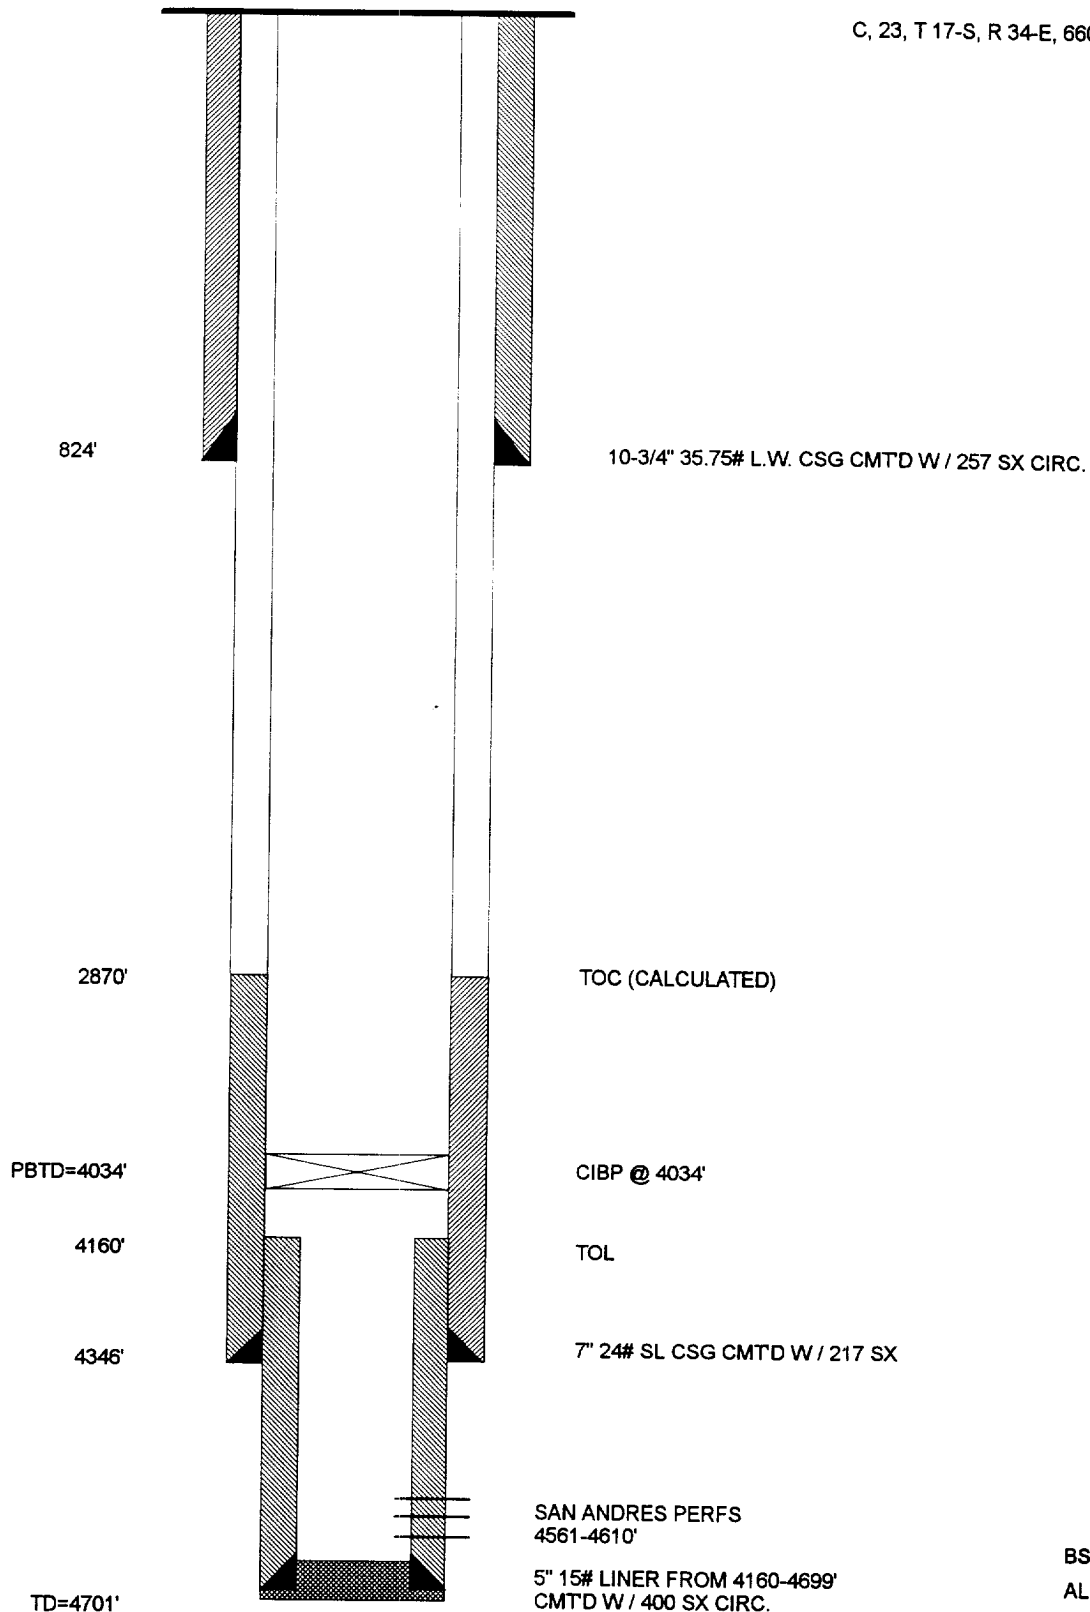


BS31C.PRE
ALS 08/03/93

BRIDGES STATE
WELL # 31 WIW
VACUUM GRAYBURG (SAN ANDRES) FIELD
LEA COUNTY, NEW MEXICO
PROPOSED COMPLETION

C, 23, T 17-S, R 34-E, 660' FNL, 1980' FWL

KB = 4031'

GL = 4020'

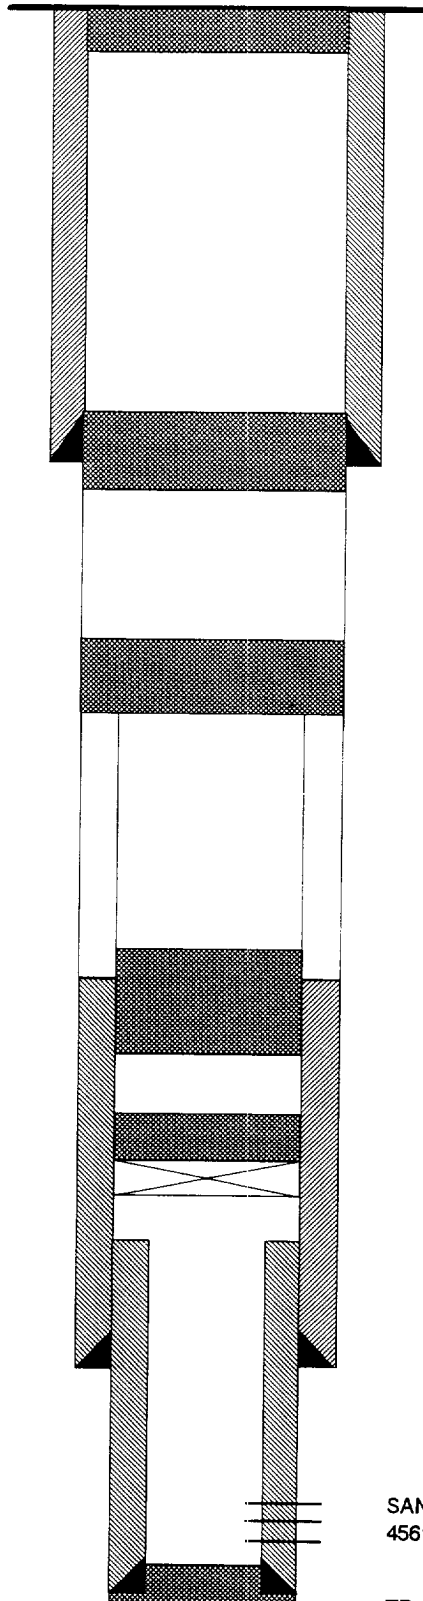

15 SX CLASS C NEAT CMT PLUG
FROM SURFACE-30'

10-3/4" 35.75# L.W. CSG CMT'D
W / 257 SX CIRC. @ 824'

50 SX CLASS C NEAT CMT PLUG ACROSS CSG SHOE
FROM 874-774'
PLUG MUST BE TAGGED!

50 SX CLASS C NEAT CMT PLUG ACROSS SALT TOP @
1747' AND 7" CSG STUB FROM 1797-1697'
PLUG MUST BE TAGGED!

TOC @ 2870' (CALCULATED)

40 SX CLASS C NEAT CMT PLUG ACROSS SALT BASE @
2810' AND TOC @ 2870' FROM 2920-2760'

CIBP @ 4034'

25 SX CLASS C NEAT CMT CAP ON TOP OF CIBP @ 4034'

TOL @ 4160'

7" 24# SL CSG CMT'D
W / 217 SX @ 4346'

SAN ANDRES PERFS
4561-4610'

5" 15# LINER FROM 4160-4699'
CMT'D W / 400 SX CIRC.

TD=4701'