

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION
P.O. Box 2088
Santa Fe, New Mexico 87504-2088

WELL API NO.	30-025-02083
5. Indicate Type of Lease	STATE ☒ FEE ☐
6. State Oil & Gas Lease No.	

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

7. Lease Name or Unit Agreement Name

Bridges State

8. Well No.
55

9. Pool name or Wildcat
Vacuum Grayburg (San Andres)

1. Type of Well:

OIL WELL ☒

GAS WELL ☐

OTHER ☐

2. Name of Operator Mobil Producing IX & NM Inc.*

*Mobil Exploration & Producing US Inc. as agent for MPTM

3. Address of Operator

P.O. Box 633, Midland, TX 79702

4. Well Location

Unit Letter B : 660 Feet From The North Line and 1980 Feet From The East Line

Section 23

Township

17-S

Range

34-E

Lea

County

10. Elevation (Show whether DF, RKB, RT, GR, etc.)
KB 4036

11.

Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐

PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐

CHANGE PLANS ☐

PULL OR ALTER CASING ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐

ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐

PLUG AND ABANDONMENT ☐

CASING TEST AND CEMENT JOB ☐

OTHER: ☐

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

- MIRU PU. DIG PIT. FLOW WELL BACK TO PIT. ND WH. NU BOP.
- POOH W/ 133 JTS 2-7/8" TBG & LD. RIH W/ WS TO 4138'. CIRC HOLE W/ 10 PPG GELLED BRINE. PUH TO 2805'. SPOT 30 SX CLASS C NEAT CMT PLUG ACROSS SALT BASE @ 2755' AND TOC @ 2720' FROM 2805-2670'.
- PUH TO 1800'. CUT AND PULL 7" CSG OR PERFORATE AND SQUEEZE 50 SX CLASS C NEAT CMT PLUG ACROSS SALT TOP @ 1750' FROM 1800-1700'. PLUG MUST BE TAGGED!
- PUH TO 882'. SPOT 50 SX CLASS C NEAT CMT PLUG ACROSS 10-3/4" CSG SHOE @ 832' FROM 882-782'. (IF 7" CSG NOT RECOVERED, PERFORATE AND SQUEEZE 50 SX CLASS C NEAT CMT PLUG). PLUG MUST BE TAGGED!
- PUH TO 30'. SPOT 15 SX CLASS C NEAT CMT PLUG FROM 30'-SURFACE. POOH W/ WS.
- ND BOP. RD PU. DIG OUT CELLAR AND CUT CSG 3' BELOW SURFACE. WELD STEEL PLATE ON CSG STUB. ERECT P&A MARKER WITH WELL NAME AND PLUGGED DATE. FILL CELLAR AND CLEAN SURFACE LOCATION.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

Kaye Pollock

TITLE

Regulatory Technician

DATE 08-06-93

TYPE OR PRINT NAME

Kaye Pollock

915-

TELEPHONE NO. 688-2584

(This space for State Use)

Orig. Signed by
Paul Kautz
Geologist

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

THE COMMISSION MUST BE NOTIFIED 24 HOURS PRIOR TO THE BEGINNING OF PLUGGING OPERATIONS FOR THE C-103 TO BE APPROVED

TITLE

DATE

AUG 11 1993

BRIDGES STATE # 55
VACUUM GRAYBURG (SAN ANDRES) FIELD
LEA COUNTY, NEW MEXICO


RECOMMENDED WORKOVER PROCEDURE

1. MIRU PU. DIG PIT. FLOW WELL BACK TO PIT. ND WH. NU BOP.
2. POOH W/ 133 JTS 2-7/8" TBG & LD. RIH W/ WS TO 4138'. CIRC HOLE W/ 10 PPG GELLED BRINE. PUH TO 2805'. SPOT 30 SX CLASS C NEAT CMT PLUG ACROSS SALT BASE @ 2755' AND TOC @ 2720' FROM 2805-2670'.
3. PUH TO 1800'. CUT AND PULL 7" CSG OR PERFORATE AND SQUEEZE 50 SX CLASS C NEAT CMT PLUG ACROSS SALT TOP @ 1750' FROM 1800-1700'. **PLUG MUST BE TAGGED!**
4. PUH TO 882'. SPOT 50 SX CLASS C NEAT CMT PLUG ACROSS 10-3/4" CSG SHOE @ 832' FROM 882-782'. (IF 7" CSG NOT RECOVERED, PERFORATE AND SQUEEZE 50 SX CLASS C NEAT CMT PLUG). **PLUG MUST BE TAGGED!**
5. PUH TO 30'. SPOT 15 SX CLASS C NEAT CMT PLUG FROM 30'-SURFACE. POOH W/ WS.
6. ND BOP. RD PU. DIG OUT CELLAR AND CUT CSG 3' BELOW SURFACE. WELD STEEL PLATE ON CSG STUB. ERECT P&A MARKER WITH WELL NAME AND PLUGGED DATE. FILL CELLAR AND CLEAN SURFACE LOCATION.

BRIDGES STATE
WELL # 55
VACUUM GRAYBURG (SAN ANDRES) FIELD
LEA COUNTY, NEW MEXICO
CURRENT COMPLETION

KB = 4036'
GL = 4025'

B, 23, T 17-S, R 34-E, 660' FNL, 1980' FEL

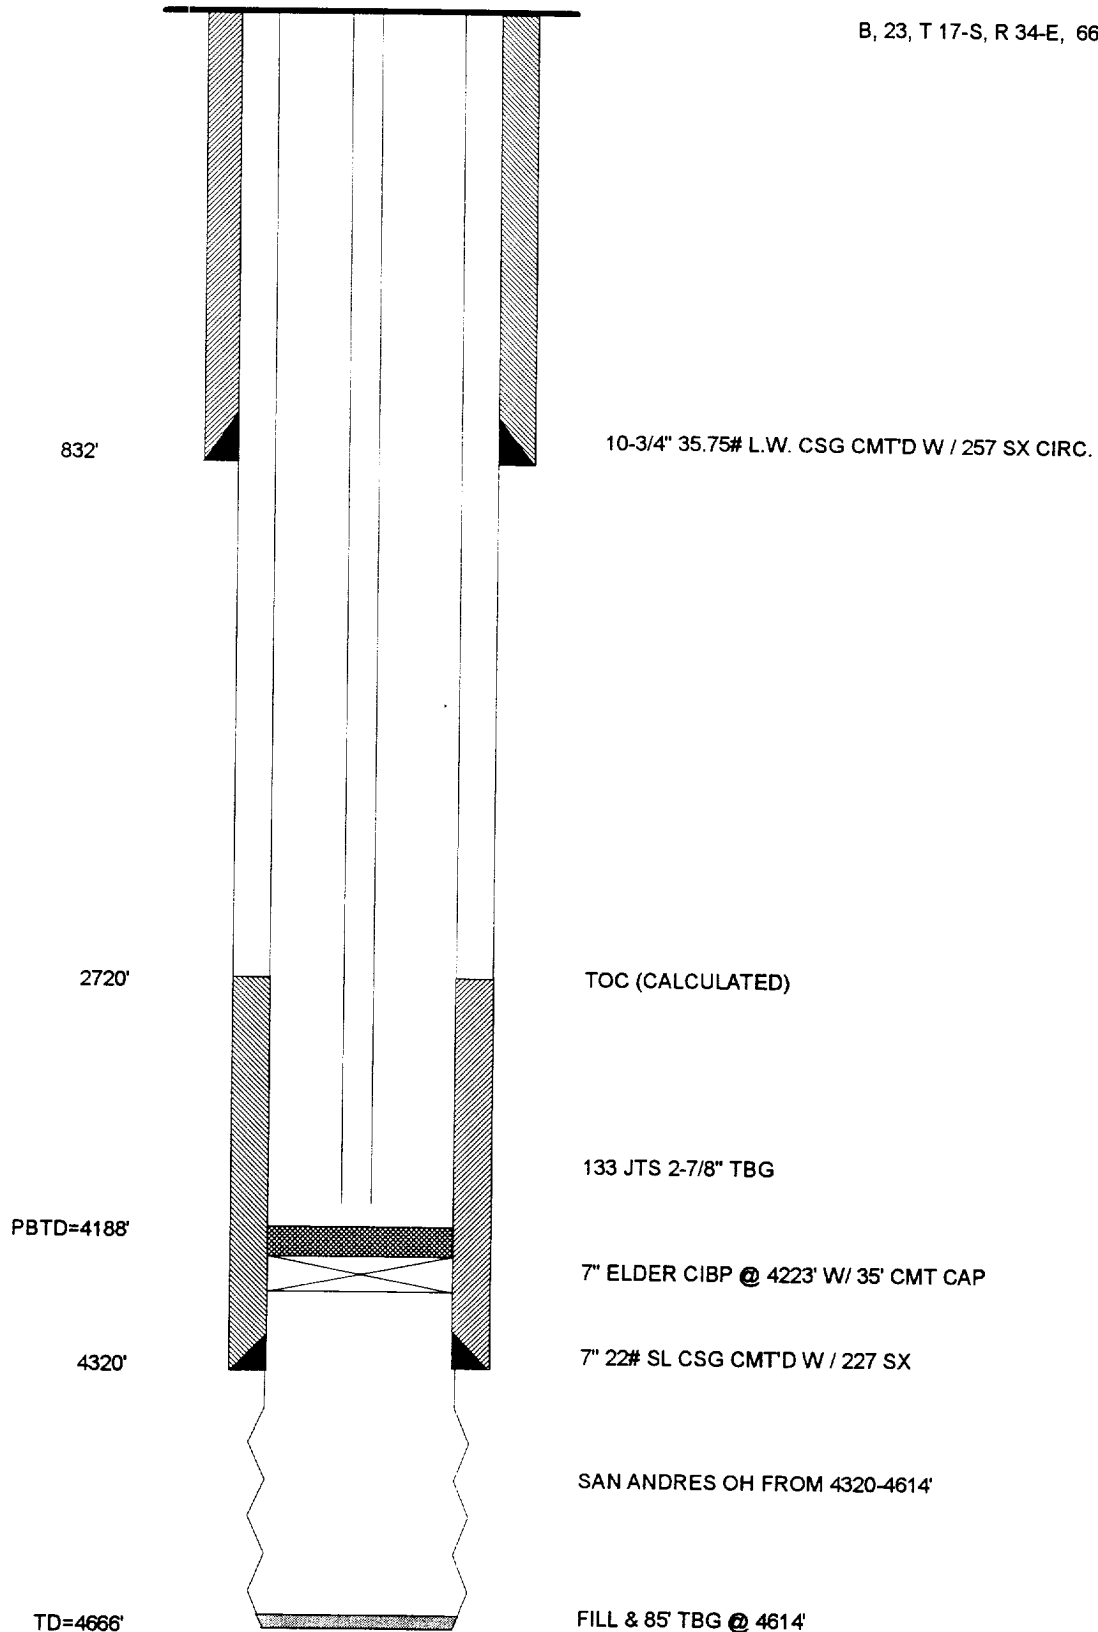

BRIDGES STATE
WELL # 55
VACUUM GRAYBURG (SAN ANDRES) FIELD
LEA COUNTY, NEW MEXICO
PROPOSED COMPLETION

B, 23, T 17-S, R 34-E, 660' FNL, 1980' FEL

KB = 4036'

GL = 4025'

10-3/4" 35.75# L.W. CSG @ 832'
CMT'D W / 257 SX CIRC.

15 SX CLASS C NEAT CMT PLUG
FROM 30'-SURFACE

50 SX CLASS C NEAT CMT PLUG ACROSS CSG SHOE
FROM 882-782'
PLUG MUST BE TAGGED!

50 SX CLASS C NEAT CMT PLUG ACROSS SALT TOP @
1750' AND 7" CSG STUB FROM 1800-1700'
PLUG MUST BE TAGGED!

TOC @ 2720' (CALCULATED)

30 SX CLASS C NEAT CMT PLUG ACROSS SALT BASE @
2755' AND TOC @ 2720' FROM 2805-2670'

PBTD=4188'

7" ELDER CIBP @ 4223' W/ 35' CMT CAP

7" 22# SL CSG @ 4320'
CMT'D W / 227 SX

SAN ANDRES OH FROM 4320-4614'

TD=4666'

FILL & 85' TBG @ 4614'