



STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION
HOBBS DISTRICT OFFICE

March 12, 1997

POST OFFICE BOX 1980
HOBBS, NEW MEXICO 88241-1980
(505) 393-6161

Attn: Robert McNaughton
Texaco Exploration & Production, Inc.
205 East Bender
Hobbs, New Mexico 88240

Re: Mobil, Bridges State #11-F, Sec. 25, T17S, R34E

Gentlemen:

According to our records, the above referenced well was plugged in 1975.

In checking the records, the original plugging procedure consisted of a plug set at 6350 feet and capped with 10 sacks of cement. The 7 inch casing was cut and pulled from a depth of 1013 feet, with the plug covering an interval from 1013 feet to 700 feet.

In an attempt to comply with NMOCD requirements regarding the permitting of injection into the Central Vacuum Unit, the well was re-entered in 1978, cleaned out to a depth of 1016 feet with 4 1/2 casing run to 1005 feet and a cement plug was set covering an interval from 1005 to 978 feet, and has since been used as a monitor well.

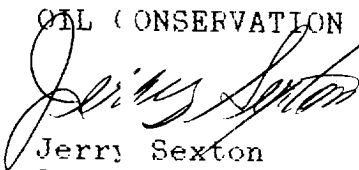
The existing plugs are not sufficient to protect the formations in well adjacent to this well.

We request that you submit a proposal to plug the well, with special attention to the isolation of all formations with either producing or injection intervals. The proposal is to be received in this office no later than May 16, 1997.

If you have any questions, please feel free to call.

Very truly yours

OIL CONSERVATION DIVISION


Jerry Sexton
Supervisor, District I

JS:bj

File