

Submit 3 Copies
to Appropriate
District Office

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-103
Revised 1-1-89

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION
P.O. Box 2088
Santa Fe, New Mexico 87504-2088

WELL API NO.
30-025-02103

5. Indicate Type of Lease
STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT"
(FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:
OIL WELL ☐ GAS WELL ☐ OTHER INJECTOR ☐

2. Name of Operator
Mobil Producing Tx. & N.M. Inc.*

3. Address of Operator *Mobil Exploration & Producing U.S. Inc., as Agent for
Mobil Producing TX. & N.M. Inc., P. O. Box 633, Midland, TX 79702

4. Well Location
Unit Letter C : 660 Feet From The NORTH Line and 1980 Feet From The WEST Line

Section 25

Township 17-2

Range 34-E

NMPM LEA

County

10. Elevation (Show whether DF, RKB, RT, GR, etc.)

KB 4013

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

MIRU PU. DIG PIT. FLOW WELL BACK TO PIT. ND WH. NU BOP.

RELEASE BAKER TENSION PKR @ 4373'. POOH W/ 145 JTS 2-3/8" BUTTRESS CL TBG & PKR & LD.

RIH W/ CIBP ON WS TO 4450'. SET CIBP @ 4450'. LOAD HOLE W/ 10 PPG GELLED BRINE. PUMP 40 SX CLASS C NEAT CMT CAP ON TOP OF CIBP FROM 4450-3995' ACROSS 7" CSG SHOE @ 4210' & 4-1/2" LINER TOP @ 4045'

PUH TO 2895' PUMP 40 SX CLASS C NEAT CMT PLUG FROM 2895-2685' ACROSS SALT BASE @ 2845' & TOC @ 2735'. POOH W/ WS

RIH W/ PERF GUN ON WIRELINE TO 1770' & PERFORATE 7" CSG. POOH W/ WIRELINE & PERF GUN

RIH W/ PKR ON WS. SQUEEZE 50 SX CLASS C NEAT CMT PLUG ACROSS SALT TOP @ 1720' FROM 1770-1670'. **PLUG MUST BE TAGGED!**

POOH W/ WS & PKR. RUN FREEPOINT ON 7" CSG. RIH W/ WIRELINE & CUT 7" CSG @ 2850'. POOH W/ WIRELINE. POOH & LD 7" CSG.

8. RIH W/ WS TO 2900'. SPOT 70 SX CLASS C NEAT CMT STUB PLUG FROM 2900-765' ACROSS 7" CSG STUB @ 2850' & 10-3/4" CSG SHOE @ 815'. **PLUG MUST BE TAGGED!**

9. PUH TO 30'. SPOT 15 SX CLASS C NEAT CMT PLUG FROM 30'-SURFACE. POOH W/ WS.

10. ND BOP. RD PU. DIG OUT CELLAR AND CUT CSG 3' BELOW SURFACE. WELD STEEL PLATE ON CSG STUB. ERECT P&A MARKER WITH WELL NAME AND PLUGGED DATE. FILL CELLAR AND CLEAN SURFACE LOCATION.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Kaye Pollock TITLE ENV. & REG. TECHNICIAN DATE 09-29-93
(915)
TYPE OR PRINT NAME KAYE POLLOCK TELEPHONE NO. 688-2584

(This space for State Use)

ORIGINAL SIGNED BY JERRY SEXTON
DISTRICT I SUPERVISOR

APPROVED BY _____ TITLE _____ DATE _____

CONDITIONS OF APPROVAL, IF ANY:

OCT 01 1993

RECEIVED

SEP 24 1971

JOHN HODGES
OFFICE

BRIDGES STATE # 32 WIW
VACUUM GRAYBURG (SAN ANDRES) FIELD
LEA COUNTY, NEW MEXICO

RECOMMENDED WORKOVER PROCEDURE

1. MIRU PU. DIG PIT. FLOW WELL BACK TO PIT. ND WH. NU BOP.
2. RELEASE BAKER TENSION PKR @ 4373'. POOH W/ 145 JTS 2-3/8" BUTTRESS CL TBG & PKR & LD.
3. RIH W/ CIBP ON WS TO 4450'. SET CIBP @ 4450'. LOAD HOLE W/ 10 PPG GELLED BRINE. PUMP 40 SX CLASS C NEAT CMT CAP ON TOP OF CIBP FROM 4450-3995' ACROSS 7" CSG SHOE @ 4210' & 4-1/2" LINER TOP @ 4045'.
4. PUH TO 2895'. PUMP 40 SX CLASS C NEAT CMT PLUG FROM 2895-2685' ACROSS SALT BASE @ 2845' & TOC @ 2735'. POOH W/ WS.
5. RIH W/ PERF GUN ON WIRELINE TO 1770' & PERFORATE 7" CSG. POOH W/ WIRELINE & PERF GUN.
6. RIH W/ PKR ON WS. SQUEEZE 50 SX CLASS C NEAT CMT PLUG ACROSS SALT TOP @ 1720' FROM 1770-1670'. **PLUG MUST BE TAGGED!**
7. POOH W/ WS & PKR. RUN FREEPOINT ON 7" CSG. RIH W/ WIRELINE & CUT 7" CSG @ ±850'. POOH W/ WIRELINE. POOH & LD 7" CSG.
8. RIH W/ WS TO ±900'. SPOT 70 SX CLASS C NEAT CMT STUB PLUG FROM ±900-765' ACROSS 7" CSG STUB @ ±850' & 10-3/4" CSG SHOE @ 815'. **PLUG MUST BE TAGGED!**
9. PUH TO 30'. SPOT 15 SX CLASS C NEAT CMT PLUG FROM 30'-SURFACE. POOH W/ WS.
10. ND BOP. RD PU. DIG OUT CELLAR AND CUT CSG 3' BELOW SURFACE. WELD STEEL PLATE ON CSG STUB. ERECT P&A MARKER WITH WELL NAME AND PLUGGED DATE. FILL CELLAR AND CLEAN SURFACE LOCATION.


PROVED

OFFICE

BRIDGES STATE
WELL # 32 WIW
VACUUM GRAYBURG (SAN ANDRES) FIELD
LEA COUNTY, NEW MEXICO
CURRENT COMPLETION

KB = 4013'
GL = 4002'

C, 25, T 17-S, R 34-E, 660' FNL, 1980' FWL

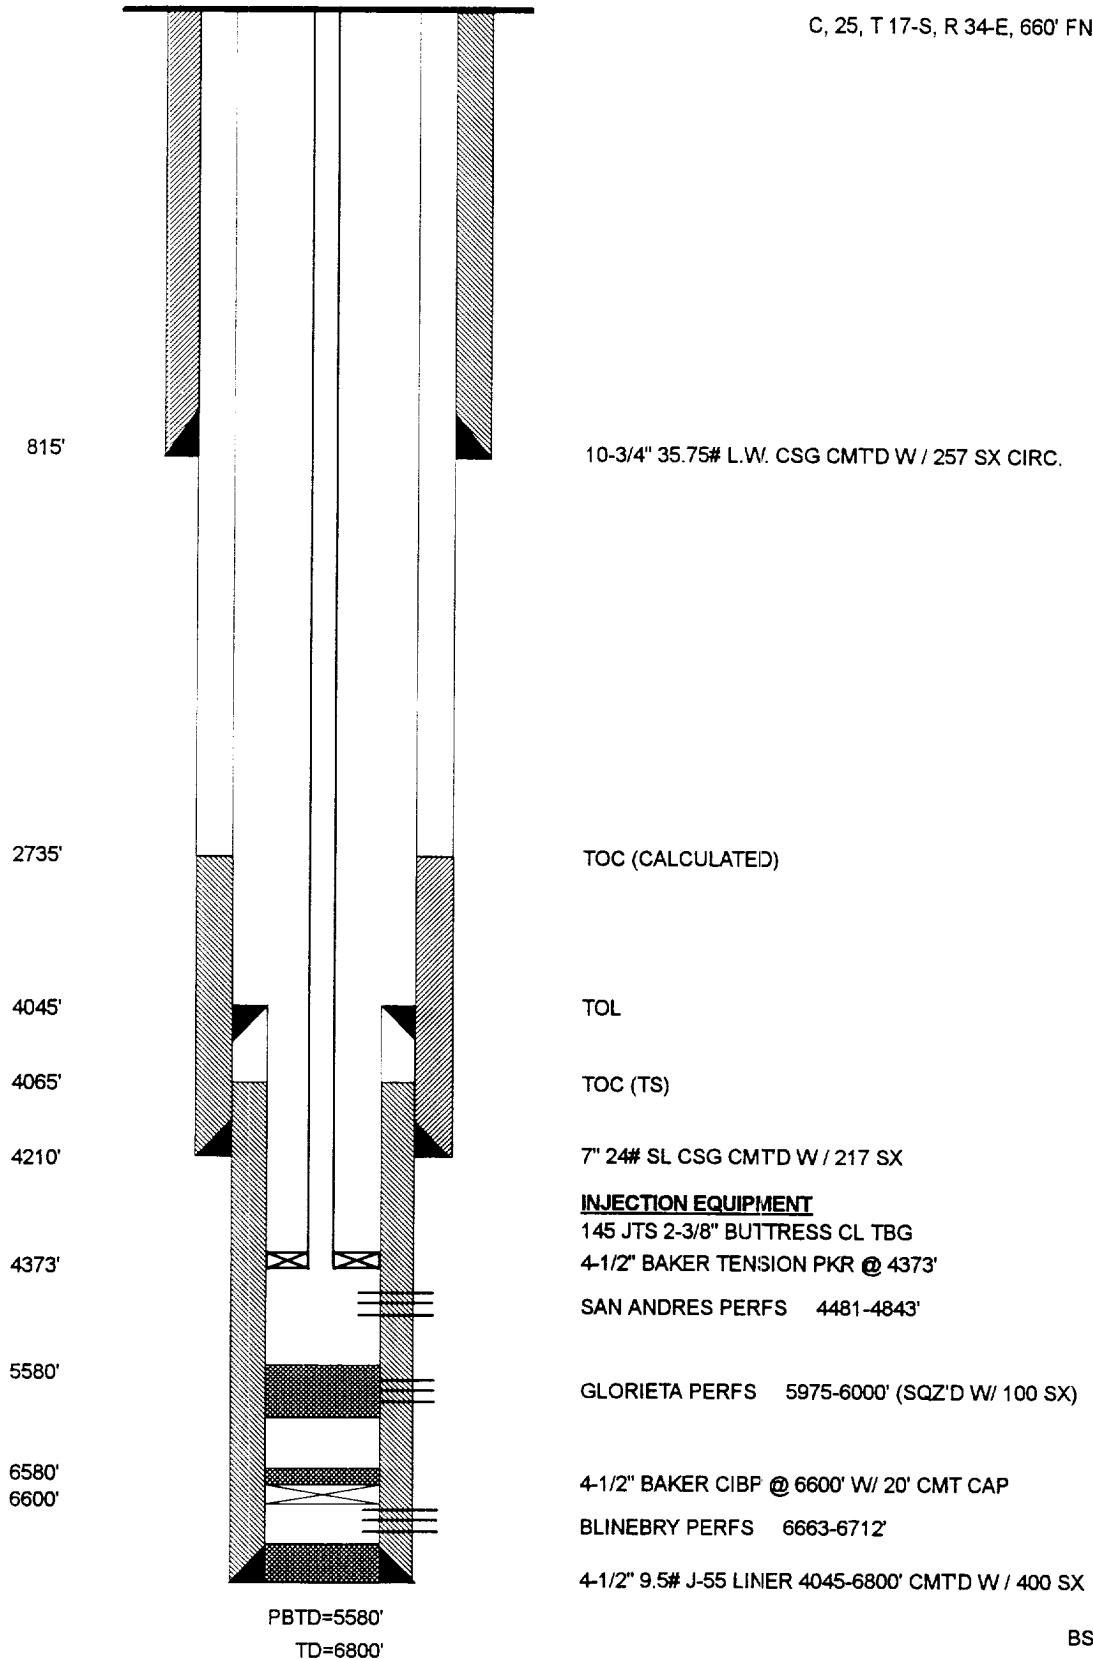

RECEIVED

COMMUNITY
OFFICE