Submit 3 Copies to Appropriate District Office

> Type of Well: WELL X

Name of Operator

3. Address of Operator

Well Location

11.

OTHER:

Unit Letter H

Section 27

PERFORM REMEDIAL WORK

TEMPORARILY ABANDON

PULL OR ALTER CASING

#### State of New Mexico Energy, Minerals and Natural Resources Department

Form C-103

DISTRICT I P.O. Box 1980, Hobbs, NM 88240

DISTRICT II P.O. Drawer DD, Artesia, NM 88210

1000 Rio Brazos Rd., Azzec, NM 87410

OIL CONSERVATION DIVISION

Revised 1-1-89 WELL API NO. P.O. Box 2088 30-025-02132 Santa Fe, New Mexico 87504-2088 5. Indicate Type of Lease STATE X FEE 6. State Oil & Gas Lease No. SUNDRY NOTICES AND REPORTS ON WELLS ( DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A 7. Lease Name or Unit Agreement Name DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.) **BRIDGES STATE** OTHER 8. Well No. Mobil Producing Tx. & N.M. Inc.\* 49 \*Mobil Exploration & Producing U.S. Inc., as Agent for 9. Pool name or Wildcat Mobil Producing TX. & N.M. Inc., P. O. Box 633, Midland, TX 79702 VACUUM GRAYBURG (SAN ANDRES) : 1980 Feet From The NORTH 660 Feet From The EAST Line and Line Township 17-S nship 17-S Range 34-E 10. Elevation (Show whether DF, RKB, RT, GR, etc.) NMPM LEA County KB 4047 Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data NOTICE OF INTENTION TO: SUBSEQUENT REPORT OF: PLUG AND ABANDON X REMEDIAL WORK **ALTERING CASING CHANGE PLANS** COMMENCE DRILLING OPNS. PLUG AND ABANDONMENT CASING TEST AND CEMENT JOB OTHER:\_ 12. Describe Proposed or Completed Operations (Clearly state all persinent details, and give pertinent dates, including estimated date of starting any proposed

work) SEE RULE 1103.

MIRU PU. DIG PIT. FLOW WELL BACK TO PIT. NO WH. NU BOP

RIH W/ WS TO 4040'. LOAD HOLE W/ 10 PPG GELLED BRINE

PUH TO 2725'. PUMP 50 SX CLASS C NEAT CMT PLUG FROM 2725-2538' ACROSS SALT BASE @ 2675' & TOC @ 2588'. POOH W/ WS.

RIH W/ PERF GUN ON WIRELINE TO 1726" & PERFORATE 7" CSG. POOH W/ WIRELINE &

RIH W/ PKR ON WS. SQUEEZE 50 SX CLASSIC NEAT CMT PLUG FROM 1726-1626' ACROSS SALT TOP @ 1676". PLUG MUST BE TAGGED!

POOH W/ WS & PKR. RUN FREEPOINT ON 7" CSG. RIH W/ WIRELINE & CUT 7" CSG @ ±850'. POOH W/ WIRELINE. POOH & LD 7" CSG

RIH W/ WS TO ±900'. PUMP 70 SX CLASS C NEAT CMT STUB PLUG FROM ±900-768' ACROSS 7" CSG STUB @ ±850" & 10-3/4" CSG SHOE @ 818" PLUG MUST BE TAGGED!

- PUH TO 30". SPOT 15 SX CLASS C NEAT CMT PLUG FROM 30"-SURFACE. POOH W/ WS.
- ND BOP. RD PU. DIG OUT CELLAR AND CUT CSG 3' BELOW SURFACE. WELD STEEL PLATE ON CSG STUB. ERECT P&A MARKER WITH WELL NAME AND PLUGGED DATE. FILL CELLAR AND CLEAN SURFACE LOCATION

5.236

hereby certify that the information above it true and complete to the best of my knowledge and belief.	
SIGNATURE TITLE ENV. & REG. TECHNICIAN	_ DATE 09-29-93
THE OR PRINT NAME KAYE POLLOCK	(915) TELEPHONE NO. 688-2584

TITLE

(This space for State Use)

APPROVED BY

ORIGINAL SIGNED BY JERRY SEXTON DISTRICT I SUPERVISOR

OCT **0 1 1993** 

DATE

CONDITIONS OF APPROVAL, IF ANY:

# BRIDGES STATE # 49 VACUUM GRAYBURG (SAN ANDRES) FIELD LEA COUNTY, NEW MEXICO

#### RECOMMENDED WORKOVER PROCEDURE


- 1. MIRU PU. DIG PIT. FLOW WELL BACK TO PIT. ND WH. NU BOP.
- 2. RIH W/ WS TO 4040'. LOAD HOLE W/ 10 PPG GELLED BRINE.
- 3. PUH TO 2725'. PUMP 50 SX CLASS C NEAT CMT PLUG FROM 2725-2538' ACROSS SALT BASE @ 2675' & TOC @ 2588'. POOH W/ WS.
- 4. RIH W/ PERF GUN ON WIRELINE TO 1726' & PERFORATE 7" CSG. POOH W/ WIRELINE & PERF GUN.
- 5. RIH W/ PKR ON WS. SQUEEZE 50 SX CLASS C NEAT CMT PLUG FROM 1726-1626' ACROSS SALT TOP @ 1676' . PLUG MUST BE TAGGED!
- 6. POOH W/ WS & PKR. RUN FREEPOINT ON 7" CSG. RIH W/ WIRELINE & CUT 7" CSG @ ±850'. POOH W/ WIRELINE. POOH & LD 7" CSG.
- 7. RIH W/ WS TO ±900'. PUMP 70 SX CLASS C NEAT CMT STUB PLUG FROM ±900-768' ACROSS 7" CSG STUB @ ±850' & 10-3/4" CSG SHOE @ 818'. PLUG MUST BE TAGGED!
- 8. PUH TO 30'. SPOT 15 SX CLASS C NEAT CMT PLUG FROM 30'-SURFACE. POOH W/ WS.
- 9. ND BOP. RD PU. DIG OUT CELLAR AND CUT CSG 3' BELOW SURFACE. WELD STEEL PLATE ON CSG STUB. ERECT P&A MARKER WITH WELL NAME AND PLUGGED DATE. FILL CELLAR AND CLEAN SURFACE LOCATION.

OFFICE OF

## BRIDGES STATE WELL # 49

# VACUUM GRAYBURG (SAN ANDRES) FIELD LEA COUNTY, NEW MEXICO CURRENT COMPLETION

H, 27, T 17-S, R 34-E, 1980' FNL, 660' FEL

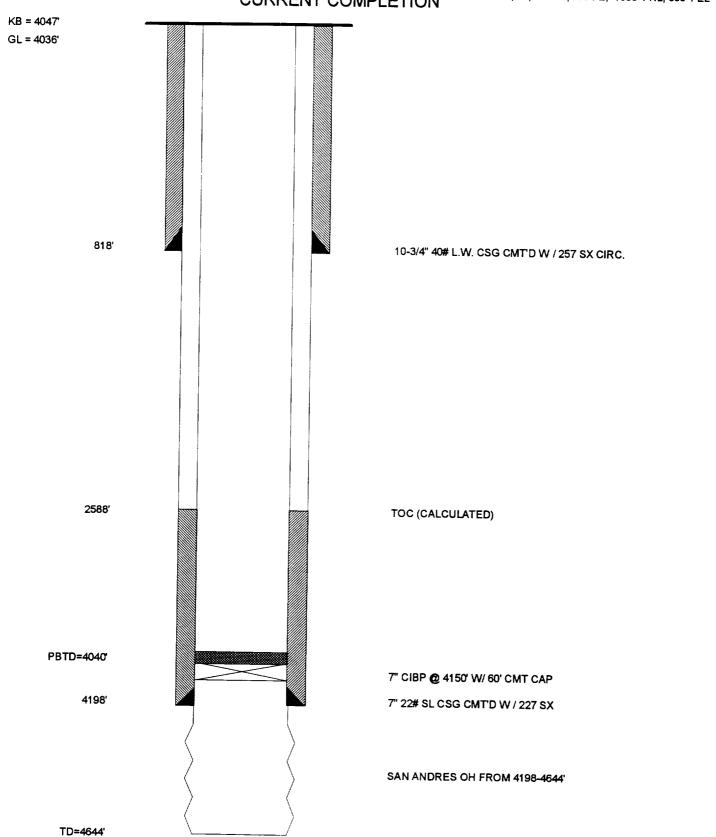


### **BRIDGES STATE** WELL #49

## VACUUM GRAYBURG (SAN ANDRES) FIELD LEA COUNTY, NEW MEXICO PROPOSED COMPLETION


H, 27, T 17-S, R 34-E, 1980' FNL, 660' FEL

KB = 4047GL = 4036'

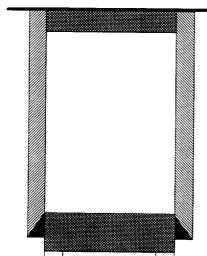

15 SX CLASS C NEAT CMT PLUG FROM 30'-SURFACE

10-3/4" 40# L.W. CSG @ 818' CMT'D W / 257 SX CIRC.

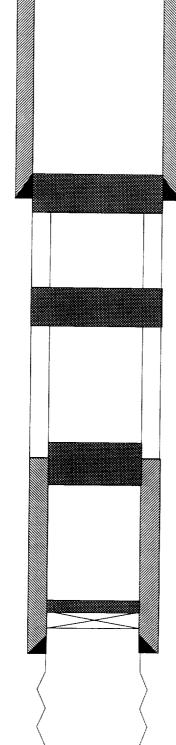

70 SX CLASS C NEAT CMT PLUG FROM 900-768' ACROSS 7" CSG STUB @ ±850' & CSG SHOE @ 818' PLUG MUST BE TAGGED!

50 SX CLASS C NEAT CMT PLUG FROM 1726-1626 PERFED & SQZ'D ACROSS SALT TOP @ 1676' **PLUG MUST BE TAGGED!** 

TOC @ 2588' (CALCULATED)

50 SX CLASS C NEAT CMT PLUG FROM 2725-2538' ACROSS SALT BASE @ 2675' AND TOC @ 2588'

7" 22# SL CSG @ 4198' CMTD W / 227 SX

7" CIBP @ 4150 W/ 60' CMT CAP'

SAN ANDRES OH FROM 4198-4644'

TD=4644'