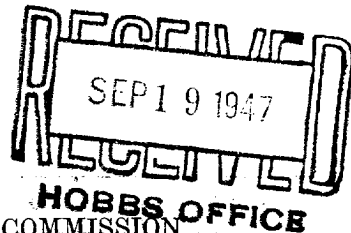
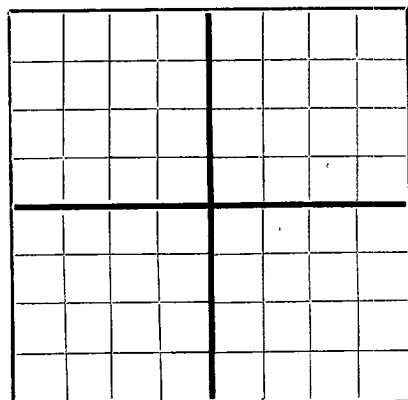


DUPLICATE

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New MexicoAREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

~~Cole-Garden Oil Company~~ 611 W. Missouri Midland, Texas
Company or Operator Address
Phillips State Well No. 1 in SE 1/4 of Sec. 30, T. 17 S.
Lease
R. 34 E, N. M. P. M., Vacuum Field, Lea County.
Well is 660 feet North of the North line and 660 feet South of the East line of 30
If State land the oil and gas lease is No. B2229 Assignment No.
If patented land the owner is. Address.
If Government land the permittee is. Address.
The Lessee is. Phillips Petroleum Company Address. Bartlesville, Oklahoma
Drilling commenced. July 31 19. 47 Drilling was completed. August 31 19. 47
Name of drilling contractor. Westlund-Johnson Address. Midland, Texas
Elevation above sea level at top of casing. 4080 feet. 4089 DF
The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from 4520 to 4540 No. 4, from 4725 to 4730
No. 2, from 4575 to 4588 No. 5, from to
No. 3, from 4670 to 4700 No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from none to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
6-5/8	24	8		1048	Halliburton				
5 1/2	17	8		3245	float				
8-5/8	43	10		910					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
11	8-5/8	910	400			
7-7/8	6-5/8	1048	(250)			
7-7/8	5 1/2	4325	()			

PLUGS AND ADAPTERS

Heaving plug—Material. Length. Depth Set.
Adapters — Material. Size.

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Mud acid	1000			
		15% LT Acid	2000			
		15% " "	5000			

Results of shooting or chemical treatment. Swabbed three (3) barrels hourly after 1st 5 bbls
per hour after 2nd treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from top feet to 4760 feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing. September 14 19. 47
The production of the first 24 hours was. 99.66 barrels of fluid of which. 99 was oil; 5/10 of 1
emulsion; 5/10 of 1 % water; and % sediment. Gravity, Be. 38 at 60°
If gas well, cu. ft. per 24 hours. Gallons gasoline per 1,000 cu. ft. of gas.
Rock pressure, lbs. per sq. in.

EMPLOYEES

Driller Driller
Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 18th
day of September, 19. 47
Notary Public

My Commission expires 10/24/49

Place Date
Name Exp. Gornett
Position Tool Dept.
Representing Cole-Garden Oil Co
Company or Operator
Address Midland Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
1275	1478	203	Red Bed
1478	1725	247	Red bed shale lime and anhy.
1725	2523	798	Red Bed salt and Anhy. and Gyp.
2523	2730	207	Anhy. and Salt
2730	3990	1260	Anhy. & Gyp.
3990	4760	770	Lime