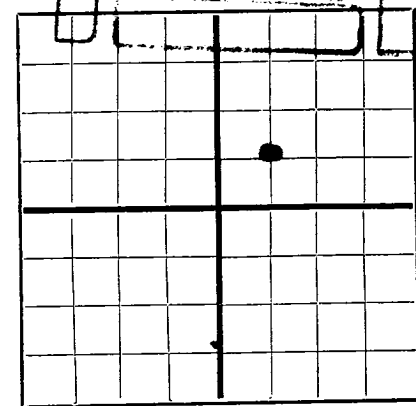


FORM C-105

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

The Texas Company Box 1720, Fort Worth 1, Texas
State of New Mexico / Company or Sub NCT-2 3 in SW 1/4 NE 1/4 of Sec. 32, T. 17-S
Lease 34-E Vacuum Lea County.
Well is 1980 feet south of the North line and 1980 feet west of the East line of Section 32
If State land the oil and gas lease is No. B-143 Assignment No. -
If patented land the owner is - Address -
If Government land the permittee is - Address -
The Lessee is The Texas Company Address Box 2332, Houston, Texas
Drilling commenced April 7 19 48 Drilling was completed May 16 19 48
Name of drilling contractor Clay & Gackle Contracting Co. Address 1804 Fair Building Fort Worth, Texas
Elevation above sea level 4078 feet. Derrick Floor
The information given is to be kept confidential until - 19 -

OIL SANDS OR ZONES

No. 1, from 4575 to 4770 No. 4, from - to -
No. 2, from - to - No. 5, from - to -
No. 3, from - to - No. 6, from - to -

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 9 to - feet.
No. 2, from - to - feet.
No. 3, from - to - feet.
No. 4, from - to - feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8-5/8"	32#	8VT	LW	902	Baker	-	-	-	-
5-1/2"	14 & 15.5#	8RT	Smls	4588	Halliburton Guide Shoe	-	-	-	-

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8-5/8	904	600	Halliburton	-	-
7-3/8"	5-1/2	4562	1400	Halliburton	-	-

PLUGS AND ADAPTERS

Heaving plug—Material - Length - Depth Set -
Adapters — Material - Size -

RECORD OF SHOOTING OR CHEMICAL TREATMENT

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	145	145	Caliche & Surface Rock
145	1416	1271	Red Beds
1416	1485	69	Red Rock & Shale
1485	1549	64	Anhydrite
1549	1588	39	Anhydrite & Gyp
1588	1980	392	Anhydrite & Salt
1980	2523	543	Salt & Shells
2523	2670	147	Salt, Potash & Anhydrite
2670	3280	610	Anhydrite & Gyp
3280	3330	50	Anhydrite, Gyp & Shale
3330	3475	145	Anhydrite & Gyp
3475	3535	60	Anhydrite & Lime
3535	3612	77	Anhydrite
3612	3935	323	Anhydrite & Lime
3935	4492	557	Hard Lime
4492	4575	83	Sandy Lime
4575	4610	35	Lime
4610	4770	160	Sandy Lime
		4770	Total Depth

All depths measured from Rotary Table r 9' above ground.

Reduced hole at 4575' to 4-3/4"

DIV. TIME TIME

Depth		Degree
415	-	1
832	-	1
1450	-	1 1/2
1975	-	3/4
2500	-	1
3000	-	1-3/4
3670	-	1-3/4
3960	-	2
4561	-	2