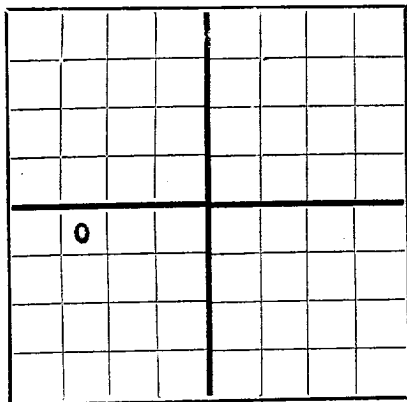


N

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

RECEIVED

OCT - 3 1950

OIL CONSERVATION COMMISSION

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Texas Gulf Producing Company

P. O. Box 1764, Midland, Texas

Company or Operator

Address

State "C"

Well No.

6

in SW/4

of Sec.

32

T. 17-S

Lease

R. 34-E

N. M. P. M.

Vacuum

Field,

Lea

County.

Well is 2970

feet south of the North line and

4290

feet west of the East line of

Said Section

If State land the oil and gas lease is No. E-1448

Assignment No. --

If patented land the owner is --

Address --

If Government land the permittee is --

Address --

The Lessee is Texas Gulf Producing Company

Address Houston, Texas

Drilling commenced August 6,

19 50

Drilling was completed

September 21,

19 50

Name of drilling contractor Cactus Drilling Company

Address San Angelo, Texas

Elevation above sea level at top of casing 4078 feet.

The information given is to be kept confidential until -- 19 --

OIL SANDS OR ZONES

No. 1, from 4655'

to

4684'

No. 4, from

to

No. 2, from

to

No. 5, from

to

No. 3, from

to

No. 6, from

to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from

to

feet.

No. 2, from

to

feet.

No. 3, from

to

feet.

No. 4, from

to

feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	OUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8-5/8 OD	32	3"	H-40	1555'	Larkin				
5-1/2	15.50	3"	J-55	4530'	Baker				
					Triplex				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
10"	8-5/8	1555'	675	Halliburton	Rotary	
8"	5-1/2	4530'	600	Halliburton	Cable Tools	

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
6-1/4		20% Acid	2000	9-23-50	4700-4640	
6-1/4		15% Acid	4000	9-27-50	4700-4640	

Results of shooting or chemical treatment Increased production from 108 barrels in 12 hours to 150 barrels of oil in 12 hours. No water. Well flowing.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 1555 feet, and from feet to feet

Cable tools were used from 1555 feet to 4705 feet, and from feet to feet

PRODUCTION

Put to producing September 21, 19 50

The production of the first 24 hours was 216 barrels of fluid of which 100 % was oil; -- %

emulsion; -- % water; and -- % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in

EMPLOYEES

Driller Driller

Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 2nd

day of October, 19 50

Billie Roy

Notary Public

My Commission expires

Notary Public, In and For

Midland County, Texas

My Commission Expires June 1, 1951

Midland, Texas

October 2, 1950

Place

Date

Name Long & Williams

Position District Supt.

Representing Texas Gulf Producing Company

Company or Operator

Address P. O. Box 1764, Midland, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	100	100	Limestone.
100	1525	1425	Red Shale & Sandstone.
1525	1655	130	Anhydrite.
1655	2750	1095	Salt & Anhydrite.
2750	3860	1110	Anhydrite with streaks of Shale, Sand & Dolomite.
3860	4220	360	Anhydrite, Dolomite, thin streaks of Sand.
4220	4580	360	Dolomite and streaks of Sand.
4580	4705	125	Dolomite---San Andres.