



DUPLICATE



NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

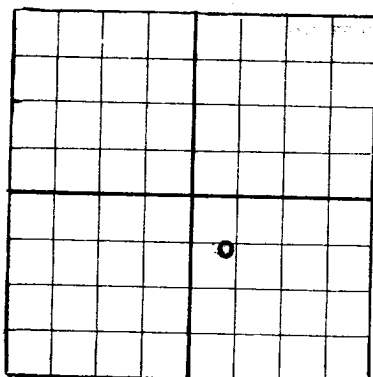AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

The Texas Company

Company or Operator

Box 2332 Houston, Texas

Address

State of New Mexico "0" Well No. 14 NW/4 SE/4 of Sec. 33 T. 17-S

R. 34-E N. M. P. M. Vacuum Field, Lea County.

Well is 1980 feet north of the line and 1980 feet west of the East line of Section 33

If State land the oil and gas lease is No. B871 Assignment No. --

If patented land the owner is -- Address --

If Government land the permittee is -- Address --

The Lessee is The Texas Company Address Box 2332, Houston, Texas

Drilling commenced April 16, 1947 Drilling was completed May 15, 1947

Name of drilling contractor Westlund-Johnson Drilling Co. Address Midland, Texas

Elevation above sea level ~~xxxxxxx~~ 4066 feet. DF

The information given is to be kept confidential until -- 19 --

OIL SANDS OR ZONES

No. 1, from 4520 to 4710 No. 4, from -- to --
 No. 2, from -- to -- No. 5, from -- to --
 No. 3, from -- to -- No. 6, from -- to --

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from -- to -- feet.
 No. 2, from -- to -- feet.
 No. 3, from -- to -- feet.
 No. 4, from -- to -- feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8-5/8"	32#	8VT	Smls	917	Baker	--	--	--	--
5-1/2"	15.50#	8RT	Smls	4246	Larkin	--	--	--	--

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8-5/8"	901	450	Hallib.	--	--
7-7/8"	5-1/2"	4221	300	Hallib.	--	--

PLUGS AND ADAPTERS

Heaving plug—Material -- Length -- Depth Set --
 Adapters—Material -- Size --

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
	None	None				

Results of shooting or chemical treatment Well was neither shot nor acidized

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 4710 feet, and from -- feet to -- feet
 Cable tools were used from -- feet to -- feet, and from -- feet to -- feet

PRODUCTION

Put to producing May 17, 1947
 The production of the first 24 hours was 121 barrels of fluid of which 100% was oil; --% emulsion; --% water; and --% sediment. Gravity Be API 37°
 If gas well, cu. ft. per 24 hours -- Gallons gasoline per 1,000 cu. ft. of gas --
 Rock pressure, lbs. per sq. in. --

EMPLOYEES

B. H. Gaston Driller Lee Durham Driller
 J. R. Rord Driller -- Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 28th

Midland, Texas May 28, 1947

day of May 19 47

Name Alth. Colauer

Mary L. Corbin Notary Public

Position Asst. District Superintendent

County, Texas

Representing The Texas Company

My Commission expires June 1, 1947

Address Box 1270, Midland, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	80	80	Caliche
80	300	220	Caliche, Sand & Gravel
300	458	158	Red Beds
458	722	264	Shale
722	901	179	Red Rock
901	1145	244	Shale & Shells
1145	1425	280	Shale & Lime
1425	1697	272	Anhydrite & Shale
1697	2862	1165	Salt & Anhydrite
2862	2890	28	Anhydrite & Gyp
2890	2995	105	Anhydrite & Lime
2995	3597	602	Anhydrite & Gyp
3597	3726	129	Anhydrite & Lime
3726	4016	290	Anhydrite, Gyp & Lime
4016	4520	504	Lime
4520	4710	190	Porous Lime
Total Depth		4710	

DEVIATION TEST

<u>DEPTH</u>	<u>DEGREE</u>
500	0
831	1-1/2
1350	1/4
1830	1
2400	1
2900	1
3391	1
3975	1/2
4500	3/4
4690	1-1/4

All measurements are from Rotary table or 10' above ground.