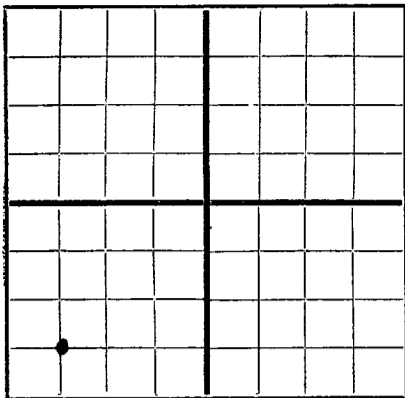


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New MexicoAREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

The Texas Company Box 1720, Ft. Worth 1, Texas
St. N.M. "0" NCT-2 Well No. 18 in SW $\frac{1}{4}$ SW $\frac{1}{4}$ of Sec. 33, T. 17-S
Lease
R. 34-E, N. M. P. M., Vacuum Field, Lea County.
Well is 660 feet North of the 1/4 line and 660 feet East of the 1/4 line of Sec. 33
If State land the oil and gas lease is No. B-871 Assignment No. -
If patented land the owner is - Address -
If Government land the permittee is - Address -
The Lessee is The Texas Company Address Box 2332, Houston, Texas
Drilling commenced September 20, 1948 Drilling was completed October 18, 1948
Name of drilling contractor Carper Drilling Co., Inc. Address Carper Bldg., Artesia, N.M.
Elevation above sea level 4071 feet. (DF)
The information given is to be kept confidential until - 19 -

OIL SANDS OR ZONES

No. 1, from 4555 to 4766 No. 4, from - to -
No. 2, from - to - No. 5, from - to -
No. 3, from - to - No. 6, from - to -

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from - to - feet. -
No. 2, from - to - feet. -
No. 3, from - to - feet. -
No. 4, from - to - feet. -

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8-5/8	28#	8RT	Smls	886	Larkin	-	-	-	-
5-1/2	14#	8RT	Smls	4425	Baker	-	-	-	-

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8-5/8	894'	500	Hallib.	-	-
7-7/8	5-1/2	4398'	900	Hallib.	-	-

PLUGS AND ADAPTERS

Heaving plug—Material - Length - Depth Set -
Adapters — Material - Size -

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
Western Co.		15%	2500	10-15-48	4536-4766	-
Western Co.		15%	6000	10-17-48	4536-4766	-

Results of shooting or chemical treatment Swabbed 37.98 bbls. pipe line oil in 6 hours.
GOR 645, Gra. 38.8, 10-18-48.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 4766 feet, and from - feet to - feet
Cable tools were used from - feet to - feet, and from - feet to - feet

PRODUCTION

Put to producing 10-15-1948
The production of the first 4 hours was 4 barrels of fluid of which 100% was oil; -% emulsion; -% water; and -% sediment. Gravity, Be. -
If gas well, cu. ft. per 24 hours - Gallons gasoline per 1,000 cu. ft. of gas. -
Rock pressure, lbs. per sq. in. -

EMPLOYEES

J. W. Pearce, Driller P. S. LeBlanc, Driller
J. D. Berry, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 1st

day of November, 1948

Mary L. Carbin
Notary Public

My Commission expires June 1, 1949

Midland, Texas Nov. 1, 1948
DateName P. S. LeBlanc
Asst. Dist. Supt.
PositionRepresenting The Texas Company
Company or Operator

Address Box 1270, Midland, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	70	70	Caliche & Sand
70	251	181	Caliche
251	1582	1331	Red Beds
1582	1670	88	Anhydrite
1670	1880	210	Anhy, Shale, & Salt
1880	2022	142	Anhy & Salt
2022	2593	571	Salt
2593	2814	221	Anhy, Gyp, & Salt
2814	3079	265	Anhy & Gyp
3079	3287	208	Anhydrite
3287	3325	38	Anhy & Gyp
3325	3605	280	Anhydrite
3605	3667	62	Anhy & Gyp
3667	3865	198	Anhydrite
3865	3880	15	Red Sand
3880	3976	96	Anhydrite
3976	4030	54	Anhy & Lime
4030	4074	44	Anhydrite
4074	4116	42	Anhy & Lime
4116	4766	650	Lime
	4766		Total Depth

All measurements from rotary table or 11' above ground.

DEVIATION TESTS

271	3/4	3220	1 1/2
870	3/4	3718	1
1453	3/4	4197	1 1/2
2000	3/4	4766	2
2500	1/2		
2964	1		