


FORM C-195

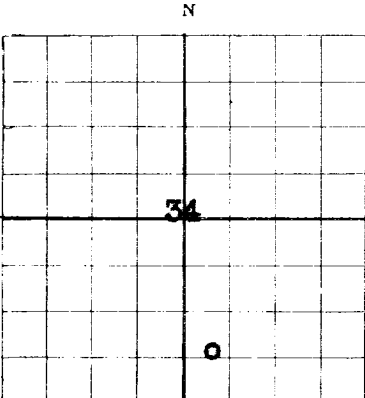


AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD



Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

DUPLICATE

The Texas Company Box 1270, Midland, Texas

State of N. M. "T" 2 Well No. in SW 1/4 - SE 1/4 of Sec. 34, T. 17-S

R. 34-E N. M. P. M., Vacuum Field, Lea County.

Well is 1980 feet south of the North line and 1980 feet west of the East line of SE 1/4 of Sec. 34

If State land the oil and gas lease is No. B-1030 Assignment No. -----

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is The Texas Company Address Box 2332, Houston, Texas

Drilling commenced March 20, 1939 Drilling was completed April 24, 1939

Name of drilling contractor Kuhn Bros. Address Box 1147, Hobbs, New Mexico

Elevation above sea level 4041 feet at derrick floor

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 4397' to 4685' No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	TO	PURPOSE
7 5/8"	26.40#	8	LW	1623'	Baker Guide				
5 1/2"	17#	10	Smls	4243'	Halliburton Guide				
2"	EUE	Smls.	Tubing	4686' (set at 4657')					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
	7 5/8"	1617'	820	Halliburton		
	5 1/2"	4230'	200	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 4685' feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing April 24, 1939 on test

The production of the first 24 hours was 170 barrels of fluid of which 100% % was oil; emulsion; % water; and % sediment. Gravity, B 36.5

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in. Gas Oil Ratio 568

EMPLOYEES

Tom Rives Driller L. J. Upton Driller
Sam Cunningham Driller R. L. Lenderman Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 13th

day of June 1939

My Commission expires 6-1-41

Midland, Texas, June 13, 1939

Name

Position District Superintendent

Representing The Texas Company Company or Operator

Address Box 1270, Midland, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	35	35	Caliche
35	200	165	Sand & Gravel
200	535	335	Red Beds
535	592	57	Red Rock & Red Bed
592	753	161	Red Bed
753	1139	386	Red Bed & Shells
1139	1259	120	Red Bed & Red Rock
1259	1400	141	Red Bed, Red Rock & Shells
1400	1580	180	Red Rock
1580	1641	61	Anhydrite
1641	1725	84	Anhydrite & Salt
1725	2015	290	Salt
2015	2198	183	Varigated Salt, Potash, Red Shale & Gyp
2198	2350	152	Salt & Streaks of Anhydrite & Gyp
2350	2800	450	Salt, Anhydrite & Potash
2800	2885	85	Salt, Anhydrite, Potash & Gyp
2885	2935	50	Salt, Anhydrite & Potash
2935	3069	134	Anhydrite & Gyp
3069	3112	43	Anhydrite, Gyp & Potash
3112	3535	423	Anhydrite & Gyp
3535	3599	64	Anhydrite, Gyp & Lime
3599	3670	71	Anhydrite & Gyp
3670	3705	35	Anhydrite, Gyp & Lime
3705	3795	90	Anhydrite & Gyp
3795	3816	21	Anhydrite, Gyp & Lime
3816	3889	73	Anhydrite, Potash & Gyp
3889	3911	22	Anhydrite, Gyp & Lime
3911	3975	64	Anhydrite & Lime
3975	4123	148	Anhydrite, Gyp & Lime
4123	4144	21	Anhydrite & Lime
4144	4685	541	Lime

T. D. 4685'

Deviation Tests as follows:

800' - 1 1/2°
 1430' - 3/4°
 2925' - 2°
 3215' - 2°
 3750' - 2 1/2°
 3850' - 1 3/4°
 4190' - 1/2°