

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## NOTICE OF INTENTION TO DRILL

COPY

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico

Dec. 1, 1938

OIL CONSERVATION COMMISSION,  
Santa Fe, New Mexico.

Gentlemen:

DUPLICATE

You are hereby notified that it is our intention to commence the drilling of a well to be known as

Geo. F. Getty, Inc. State "F" Well No. 4 in CNE NW  
Company or Operator Lease  
of Sec. 36, T. 17, R. 34, N. M. P.M., Vacuum Field, Lea County.  
N.

The well is 660 feet (X) (S.) of the North line and 1980 feet  
(E.) (X) of the West line of Section 36 -

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

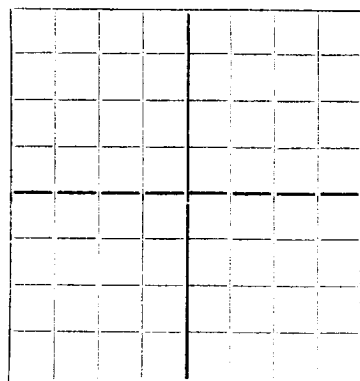
If state land the oil and gas lease is No. B-1565, Assignment No. \_\_\_\_\_

If patented land the owner is \_\_\_\_\_

Address \_\_\_\_\_

If government land the permittee is \_\_\_\_\_

Address \_\_\_\_\_

The lessee is Geo. F. Getty, Inc.Address Jersey City, New JerseyAREA 640 ACRES  
LOCATE WELL CORRECTLY

We propose to drill well with drilling equipment as follows: \_\_\_\_\_

Rotary tools from top to total depth.

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows: \_\_\_\_\_

We propose to use the following strings of casing and to land or cement them as indicated:

Size of Hole	Size of Casing	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
16"	13" OD	40#	Second Hand	260'	Cemented	200
12"	9-5/8"	36#	" "	1520'	Cemented	300
8-1/4"	7"	24#	New	4100'	Cemented	300

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 4150 feet.

Additional information:

In setting and cementing the 13" OD surface casing the cement will be circulated back into the cellar by Halliburton Process. At each time casing is set and cemented sufficient time shall be allowed for cement to thoroughly set before drilling plug and testing.

Approved \_\_\_\_\_, 1938 Sincerely yours,

except as follows: \_\_\_\_\_

SKELLY OIL COMPANY - Operator for  
Company or Operator  
Geo. F. Getty, Inc.

Position District Superintendent

Send communication regarding well to

Name SKELLY OIL COMPANYAddress Hobbs, New Mexico

OIL CONSERVATION COMMISSION,

By Rose Walker L.M.

Title \_\_\_\_\_