


NEW MEXICO OIL CONSERVATION COMMISSION


Santa Fe, New Mexico



WELL RECORD

HOBBS OFFICE

DUPLICATE

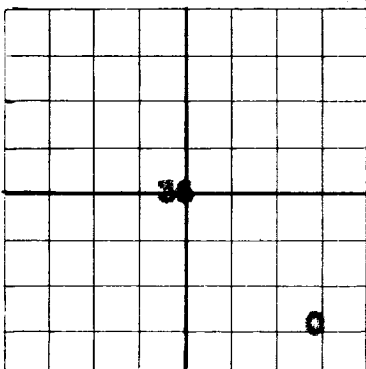

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

The Texas Company

Drawer K, Wink, Texas

Company or Operator

Address

St. R.M. "O"

Well No. 7

to 36-1-36

of Sec. 36

T. 17-S

R34-E

N. M. P. M., Vacuum

Field, Lea

County.

Well is 1980 feet south of the North line and 330 feet west of the East line of 36 of Sec. 36

If State land the oil and gas lease is No. B-155 Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is The Texas Company Address Box 2332, Houston, Texas

Drilling commenced August 30 1938 Drilling was completed September 27 1938

Name of drilling contractor American Drilling Corp. Address Hobbs, New Mexico

Elevation above sea level 3996 feet at derrick floor.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 29 20 to 3020 gas No. 4, from 4540 to 4710
No. 2, from 3220 to 3260 No. 5, from to
No. 3, from 4380 to 4420 No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
7-5/8"	26.40	8	LW	1542	Halliburton Guide				
5 1/2"	17	10	Smis	4106	"	"			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
9-7/8"	7-5/8"	1537	300	Halliburton		
6-3/4"	5 1/2"	4099	200	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from 4710 feet to feet, and from feet to feet

PRODUCTION

Put to producing 19
The production of the first 27 September 27 39 barrel test, of which % was oil; % emulsion; % water; and 144 % sediment. Gravity, Be 100X -
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in. 36.5

EMPLOYEES Gas-Oil Ratio - 400.

Driller Roy Rodgers Driller H. G. Mills
R. K. Nikel FORMATION RECORD ON OTHER SIDE Chas. Kennitz

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 17th day of October 1938
Notary Public

Place Wink, Texas Date October 17, 1938
Name
Position Assistant Superintendent
Representative Company or Operator
Address The Texas Company
Drawer K. Wink, Texas

My Commission expires

5-31-39

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	60	60	Caliche
60	214	154	Sand & Shells
214	1243	1029	Red Beds & Shells
1243	1470	227	Red Rock & Red Beds.
1470	1590	110	Anhydrite
1590	2615	1025	Salt & Anhydrite
2615	2800	185	Anhydrite
2800	2865	65	Sand & Anhydrite
2865	2980	115	Anhydrite
2980	3690	710	Anhydrite & Lime
3690	4000	310	Sandy Lime & Anhydrite
4000	4120	120	Hard Lime
4120	4250	110	Lime & Broken Lime
4250	4360	130	Hard Lime
4360	4420	60	Porous Lime
4420	4538	118	Hard Lime
4538	4614	76	Medium Lime
4614	4710	96	Saturated Porous Lime
			TOTAL DEPTH 4710'.
			Deviation tests as follows:
			500' - 0°
			1000' - 1°
			1400' - 7/8°
			2000' - 1 1/8°
			2500' - 1°
			2940' - 2/8°
			3585' - 1 1/2°
			3870' - 1-1/8°
			4075' - 7/8°

PDOJR-JFB
10-17-38