
Submit 3 Copies To Appropriate District State of New Mexico Form C-103 Energy, Minerals and Natural Resources Revised March 25, 1999 District [WELL API NO. 162,5 N. French Dr., Hobbs, NM 88240 Dis ict II 30-025-02405 OIL CONSERVATION DIVISION 811 South First, Artesia, NM 88210 5. Indicate Type of Lease District III 2040 South Pacheco 1000 Rio Brazos Rd., Aztec, NM 87410 STATE [X] FEE Santa Fe, NM 87505 District IV 6. State Oil & Gas Lease No. 2040 South Pacheco, Santa Fe, NM 87505 63404-00 SUNDRY NOTICES AND REPORTS ON WELLS 7. Lease Name or Unit Agreement Name: (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.) 1. Type of Well: Oil Well Gas Well Other Sarah Sue 2. Name of Operator 8. Well No. Lea County Production, LLC 3. Address of Operator 9. Pool name or Wildcat P.O. 5/15 Hobbs, NM 88241 Pearl Seven Rivers Well Location Unit Letter E : 1980 feet from the North line and 660' feet from the West Section Township 195 Range 34E **NMPM** County 10. Elevation (Show whether DR. RKB, RT, GR, etc.) 3721' GR 11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data NOTICE OF INTENTION TO: SUBSEQUENT REPORT OF: PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON [X] REMEDIAL WORK ALTERING CASING **TEMPORARILY ABANDON** CHANGE PLANS COMMENCE DRILLING OPNS. PLUG AND ABANDONMENT **PULL OR ALTER CASING** ☐ MULTIPLE CASING TEST AND COMPLETION **CEMENT JOB** OTHER: OTHER: 12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation. 1. Set a C.I.B.P. at 3900'. Circulate hole with gelled brine mud. Spot 25 sxs cement plug on top of C.I.B.P. 3650'-3900'. - TAG 2. 3. Perforate the 5 1/2" casing at 1980'. Set a sement Squeeze 60 sxs cement thru perfs at 1980'. 50' N+OUT 2050+0 1930-TAG Perforate the 5 1/2" casing at 170'. Circulate 50 sxs cement thru perfs at 170' to fill hole to surface. 5. Install dryhole marker and clear location. I hereby certify that the information above is true and complete to the best of my knowledge and belief. SIGNATURE TITLE Telephone No. 3 (This space for State use) APPPROVED BY

Conditions of approval, if any:

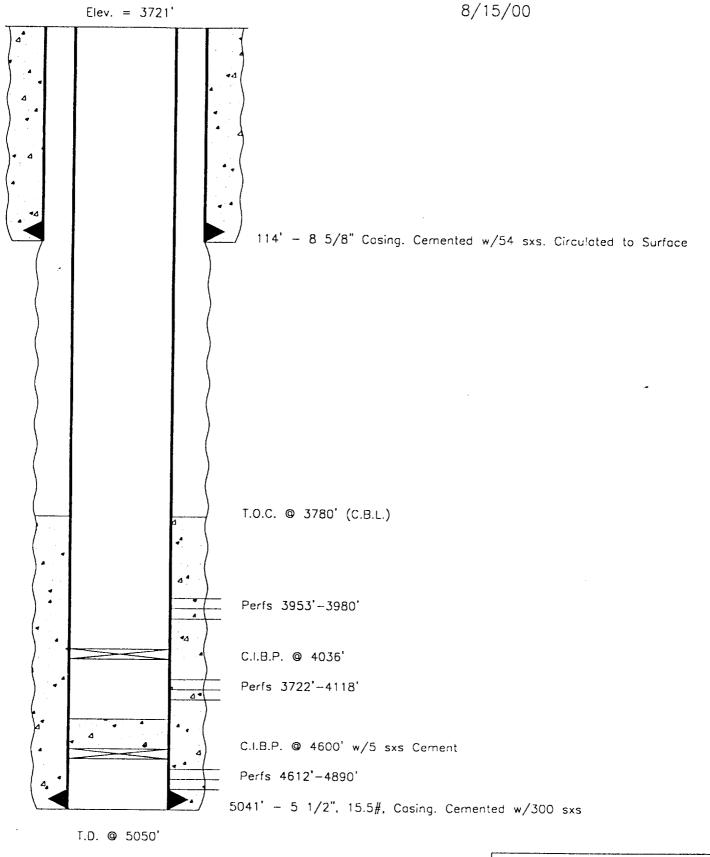

Le	<u>a C</u>	<u>oun</u>	ty P	rod	uction	1
Sa	rah	Su	e #1			
'E''	1980'		FNL	&	660'	F۷

Sec. 36, T-19S, R-34E

Lea County, NM



PROPOSED PLUG AND ABANDONMENT 8/15/00

Elev. = 3721'CIRCULATE 50 SXS CEMENT THRU PERFS AT 170' 114' - 8 5/8" Casing. Cemented w/54 sxs. Circulated to Surface PERFORATE 5 1/2" CASING @ 170' MUD SET A CEMENT RETAINER AT 1880' SQUEEZE 60 SXS CEMENT THRU PERFS @ 1980' PERFORATE THE 5 1/2" CASING AT 1980' MUD T.O.C. @ 3780' (C.B.L.) SPOT 25 SXS CEMENT PLUG 3650'-3900' SET A C.I.B.P. AT 3900' Perfs 3953'-3980' C.I.B.P. @ 4036' Perfs 3722'-4118' C.I.B.P. @ 4600' w/5 sxs Cement Perfs 4612'-4890' 5041' - 5 1/2", 15.5#, Cosing. Cemented w/300 sxs T.D. @ 5050'

Lea County Production
Sarah Sue #1
"E" 1980' FNL & 660' FWL
Sec. 36, T—19S, R—34E
Lea County, NM

