


OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

MISCELLANEOUS REPORTS ON WELLS

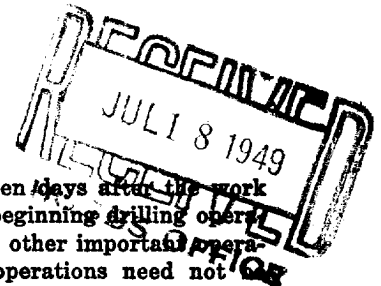

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING	
REPORT ON RESULT OF TEST OF CASING SHUT-OFF	<input checked="" type="checkbox"/>	REPORT ON DEEPENING WELL	
REPORT ON RESULT OF PLUGGING OF WELL			

July 13, 1949

Date

Hobbs, New Mexico

Place

OIL CONSERVATION COMMISSION,
SANTA FE, NEW MEXICO
Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the _____

Stanolind Oil and Gas Company State WY Well No. 1 in the _____
Company or Operator Lease
NW/4 of Sec. 12, T. 17-S, R. 35-E, N. M. P. M.,
West Lovington Field, Lea County.

The dates of this work were as follows: July 8-10, 1949

Notice of intention to do the work was ~~(crossed out)~~ submitted on Form C-102 on July 9 19 49
and approval of the proposed plan was ~~(crossed out)~~ obtained. (Cross out incorrect words.)

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

On July 10, 1949 at 1:00 p.m., 48 hours had elapsed since running 2004' of 8-5/8" casing set at 1997' and cemented with 1300 sacks to be used as intermediate string. Cement was circulated to surface. At this time pipe and water shut off was tested by applying 1000 psi pressure and holding for 30 minutes, before and after drilling cement plug. Pressure did not drop in excess of 100 psi. Drilling was resumed.

Witnessed by A. W. Gibson Name Stanolind Oil and Gas Co. Head Roundabout
Company Stanolind Oil and Gas Co. Title Head Roundabout

Subscribed and sworn before me this 14th

day of July 19 49

[Signature]

Notary Public

I hereby swear or affirm that the information given above is true and correct.

Name [Signature]

Position Production Foreman

Representing Stanolind Oil and Gas Company
Company or Operator

My commission expires 2-28-50

Address Box "F", Hobbs, New Mexico

Remarks:

APPROVED

JUL 19 1949

Date

[Signature]
Name
Oil & Gas Inspector
Title